

In-vehicle Computing



# Nuvo-9100VTC Series

Intel® 13th/ 12th-Gen Core™ in-vehicle controller with 4x M12/ 4x RJ45 / 8x RJ45 PoE+ ports



## Key Features

- Supports Intel® 13th/12th-Gen Core™ 24C/ 32T 35W/ 65W LGA1700 CPU
- 4x or 8x 802.3at PoE+ ports via M12 or RJ45 connectors
- 1x USB 3.2 Gen2x2 type-C and 8x USB 3.2/ 2.0 type-A ports
- On-board isolated CAN bus for in-vehicle communication
- 4-CH isolated DI and 4-CH isolated DO
- M.2 Gen4 x4 NVMe SSD slot
- 8V to 48V wide-range DC input with built-in ignition power control
- 2x SATA ports with 1x hot-swappable HDD tray, supporting RAID 0/1
- E-Mark certified and EN 50155 EMC compliant

Contact Neosys

Get Quote

## Introduction

Nuvo-9100VTC is Neosys' latest rugged in-vehicle controller based on Intel® 13<sup>th</sup>/ 12<sup>th</sup>-Gen Core™ processors. Benefiting from cutting-edge Intel® 7 photolithography, the latest Core™ desktop processors come with up to 24 cores/ 32 threads, offering an incredible boost of computational performance. Combining DDR5 memory bandwidth throughput and PCIe Gen4 NVMe high-speed disk read/write, users can expect an overall system performance improvement of up to 1.8x when compared to previous 10th or 11th-Gen platforms.

Nuvo-9100VTC provides flexibility to support a range of peripherals and connections. It has 2.5Gb and 1Gb Ethernet ports, and four or eight 802.3at PoE+ ports to supply 25W of power to connected devices such as IP cameras. The system also has x-coded M12 connectors and screw-lock mechanisms on the computer I/Os like Gigabit Ethernet, USB 3.2 Gen1 and USB 3.2 Gen2 to guarantee extreme rugged connectivity in shock/ vibration environments. Wireless connectivity is essential for modern-day in-vehicle applications, and you can simultaneously utilize two M.2 and three mini-PCIe sockets with corresponding wireless modules for 5G/ 4G, WIFI, GPS, and CAN module for communication.

On top of all that, Nuvo-9100VTC also features an isolated CAN bus for in-vehicle communication, isolated DIO for sensor/ actuator control, 8V to 48V wide-range DC input with ignition power control, and is E-Mark certified, making it the perfect solution with extraordinary reliability for various in-vehicle applications.

## Specifications

System Core		Expansion Bus		
Processor	Supporting Intel® 13th-Gen Core™ CPU (LGA1700 socket, 65W/ 35W TDP)	Mini PCI Express	1x full-size mini-PCIe socket	
	- Intel® Core™ i9-13900E/ i9-13900TE		2x full-size mini-PCIe sockets (USB signals only) with internal SIM sockets	
	- Intel® Core™ i7-13700E/ i7-13700TE		M.2	1x M.2 2242/3052 B key socket with SIM slot for M.2 5G/ 4G module
	- Intel® Core™ i5-13500E/ i5-13400E/ i5-13500TE			1x M.2 2242/3052 B key socket with SIM slot for M.2 4G module
	- Intel® Core™ i3-13100E/ i3-13100TE			
- Intel® Pentium® G7400E/ G7400TE				
- Intel® Celeron® G6900E/ G6900TE				
Chipset	Intel® Q670E platform controller hub	Power Supply		
Graphics	Integrated Intel® UHD Graphics 770 (32EU)	DC Input	1x 3-pin pluggable terminal block for 8V to 48V DC input (IGN/ GND/ V+)	
Memory	Up to 64 GB DDR5 4800 SDRAM (two SODIMM slots)	Ignition Control	Built-in ignition power control	
AMT	Supports Intel vPro/ AMT 16.0	Remote Ctrl. & LED Output	1x 3-pin pluggable terminal block for remote control and PWR LED output	
TPM	Supports dTPM 2.0	Mechanical		
I/O Interface		Dimension	240 mm (W) x 225 mm (D) x 84 mm (H)	
Ethernet port	1x 2.5G Ethernet by I225-IT and 1x Gigabit Ethernet by I219-LM with screw-lock	Weight	3.7kg	
PoE+	4x IEEE 802.3at Gigabit PoE+ ports by Intel® I210 - M12 X-coded connector (Nuvo-9100VTC) - RJ45 connector (Nuvo-9104VTC) 4x IEEE 802.3at Gigabit PoE+ ports by Intel® I210 and 4x 2.5G PoE+ ports by I225-IT - RJ45 connector (Nuvo-9108VTC)	Mounting	Wall-mount with damping bracket	
USB 3.2	1x USB 3.2 Gen2x2 (20 Gbps) port in type-C connector with screw-lock 4x USB 3.2 Gen2x1 (10 Gbps) ports in type-A connectors 2x USB 3.2 Gen1x1 (5 Gbps) ports in type-A connectors	Environmental		
USB 2.0	2x USB 2.0 ports	Operating Temperature	<b>With 35W CPU</b> -40°C ~ 70°C <sup>[1]</sup> (with 1 memory module installed) -40°C ~ 60°C <sup>[2,3]</sup> ((with 2 memory modules installed)	
CAN Bus	1x isolated CAN 2.0 port	Storage Temperature	<b>With 65W CPU</b> -40°C ~ 50°C <sup>[2,3]</sup> (configured as 65W TDP with 2-slots memory)	
Video Port (Integrated Graphics)	1x VGA, supporting 1920 x 1200 resolution 1x DVI-D, supporting 1920 x 1200 resolution 1x DisplayPort, supporting 4096 x 2304 resolution	Humidity	10% to 90%, non-condensing	
Serial Port	2x software-programmable RS-232/ 422/ 485 ports (COM1/COM2) 2x RS-232 ports (COM3/COM4)	Vibration	MIL-STD-810H, 514.8, Category 4	
Isolated DIO	4-CH isolated DI and 4-CH isolated DO	Shock	MIL-STD-810H, 516.8, Procedure I	
Audio	1x 3.5 mm jack for mic-in and speaker-out	EMC	E-Mark, EN 50121 (EN 50155 EMC) CE/FCC Class A, according to EN 55032 & EN 55035	
Storage Interface		<sup>[1]</sup> Due to high heat generation of DDR5 memory, please configure the CPU to 35W mode and utilize only one memory slot, while operating at a temperature of 70°C. <sup>[2]</sup> For sub-zero operating temperature, a wide temperature HDD or Solid State Disk (SSD) is required. <sup>[3]</sup> For CPU operating at 65W mode, the highest operating temperature shall be limited to 50°C and thermal throttling may occur when sustained full-loading applied. Users can configure CPU power in BIOS to allow higher operating temperature.		
SATA HDD	1x hot-swappable 2.5" HDD tray (7mm HDD/ SSD) and 1x internal 2.5" SATA ports			
M.2	1x M.2 2280 M key socket (PCIe Gen4 x4) for NVMe SSD			


All rights reserved. Copyright© 2023 Neosys Technology Inc.

Last updated: 17 - Aug 2023




Nuvo-9100VTC Series

**Appearance**

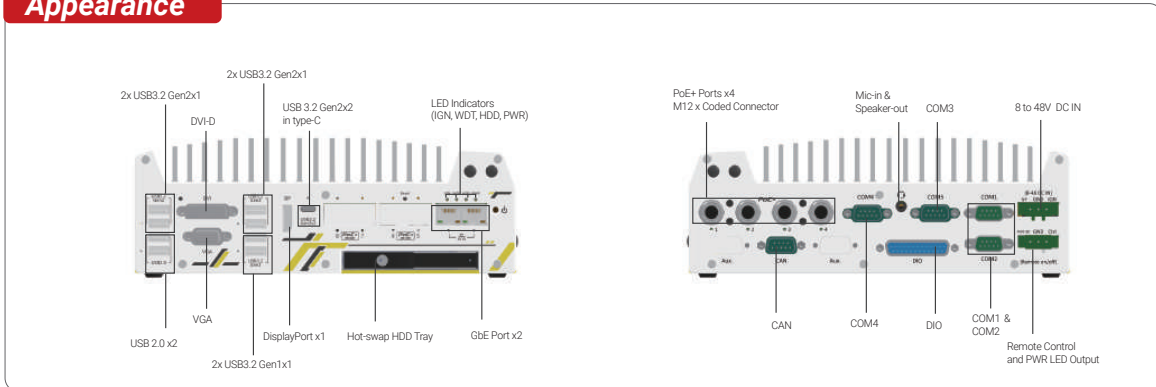

**Dimensions**

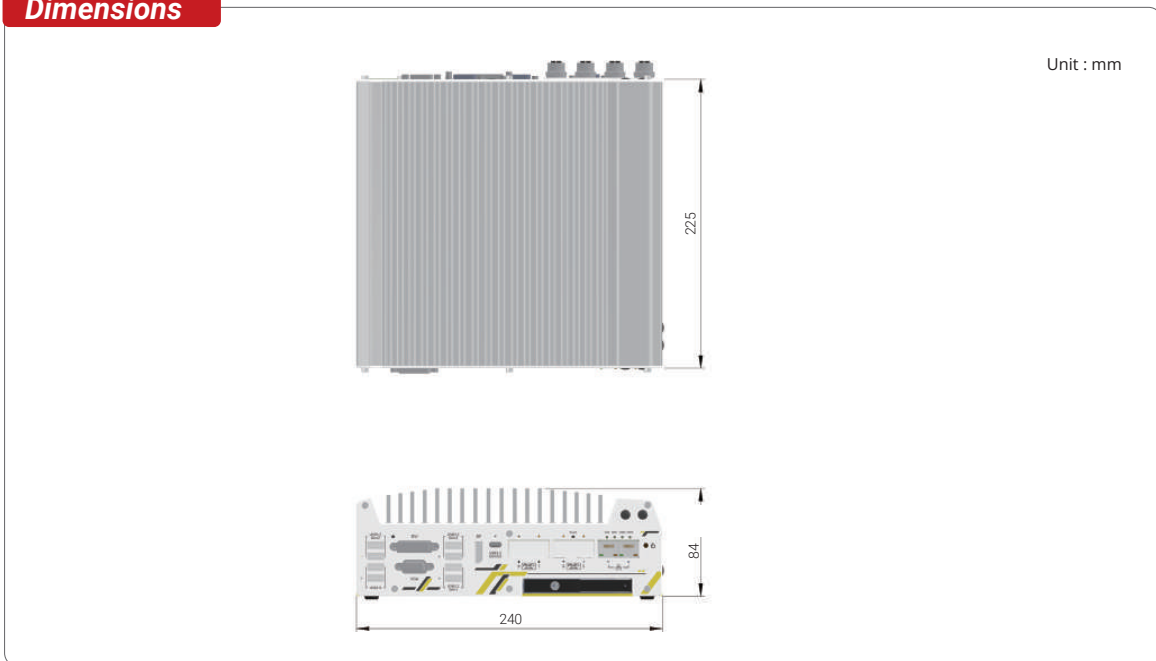

**Ordering Information**

Model No.	Product Description
<b>Nuvo-9100VTC</b>	Intel® 13th/ 12th-Gen Core™ in-vehicle controller with 4x M12 PoE+ Ports, DIO, CAN bus and RAID
<b>Nuvo-9104VTC</b>	Intel® 13th/ 12th-Gen Core™ in-vehicle controller with 4x RJ45 PoE+ Ports, DIO, CAN bus and RAID
<b>Nuvo-9108VTC</b>	Intel® 13th/ 12th-Gen Core™ in-vehicle controller with 8x RJ45 PoE+ Ports, DIO, CAN bus and RAID

**Optional Accessories**

<b>Cbl-M12X8M-RJ45F-100CM</b>	M12 (8-pole-X-coded) to RJ45 Female, CAT6A, Length : 100CM
<b>Cbl-M12X8M-RJ45-CAT6A-500CM</b>	M12 (8-pole-X-coded) to RJ45, CAT6A, Length : 500CM
<b>PA-280W-ET2</b>	280W AC/DC power adapter 24V/ 11.67A ; 16AWG/ 100cm; cord end terminals for terminal block, operating temperature : -30°C to 60°C.

All specifications and photos are subject to change without prior notice

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660