

CV-W124/M1101 Series

24" TFT Full HD 16:9 Touch Monitor with Resistive 5-wire /
Projected Capacitive Touch, 1x DisplayPort, 1x HDMI, 1x VGA



MEETING ALL YOUR INDUSTRIAL MONITOR NEEDS

| CV-100/M1000 Series Industrial Monitor |

Overview

The Cincoze CV-100/M1101 series modular industrial touch monitors are suitable for the display requirements of equipment HMI and production process visualization in harsh on-site applications. The wide selection of screen sizes and touch options are just some of the features. The patented CDS (Convertible Display System) technology makes field side maintenance easier and enables simpler upgrades in the future. The CV-100/M1101 series supports digital and analog signal inputs, including HDMI, DisplayPort and VGA. It also has a multi-language OSD and supports multiple installation methods, including panel, VESA, and rack mount, so the monitor can adapt to deployment in a variety of application scenarios.

- 24" Full HD TFT-LCD with Resistive 5-wire, Projected Capacitive Touch, or Glass Only
- Designed with Aluminum Die-Casting Front Frame
- Various Video Input Interfaces: 1x VGA, 1x HDMI, 1x DisplayPort Input
- Support USB & RS-232 Interfaces for Touch Function
- OSD Control keys for Brightness Adjustment
- Convertible Display System (CDS) Supported
- True Flat IP65 Front Panel Protection
- Support Panel / VESA / Rack Mount



Complete Range of Sizes

The CV-100/M1101 series has a comprehensive selection of screens, with various screen sizes (8.4 - 24 inches), display ratios (4:3, 5:4, and 16:9), touch methods (multi-point capacitive and single-point resistive), and brightnesses (300-500 nits) to optimally match application requirements.



CDS Patented Technology

The patented CDS technology makes field side maintenance and future upgrades simpler and more cost-effective because a single part of the system can be replaced instead of replacing the whole thing.

Patent No. M482908

Multiple Display Inputs

The CV-100/M1101 series has three different display inputs, including HDMI and DisplayPort digital inputs and VGA analog input.



Rugged, Safe, and Reliable

The CV-100/M1101 series has industrial-grade protections, including wide temperature support (-20°C to 70°C) and a dust- and water-resistant IP65 front panel to face harsh operating environments. In pursuit of ever higher product safety, the CV-100/M1101 series have also undergone rigorous testing to pass UL certification for product safety.



CV-W124 Series Specifications


| Model Name | CV-W124R | CV-W124C | CV-W124G |
|-------------------------|--|---|----------------|
| Display | | | |
| LCD Size | ▪ 24" (16:9) | | |
| Max. Resolution | ▪ 1920 x 1080 | | |
| Brightness (cd/m2) | ▪ 300 | | |
| Contrast Ratio | ▪ 5000 : 1 | | |
| LCD Color | ▪ 16.7M | | |
| Pixel Pitch (mm) | ▪ 0.27675 (H) x 0.27675 (V) | | |
| Viewing Angle (H-V) | ▪ 178 / 178 | | |
| Backlight MTBF | ▪ 50,000 hrs (LED Backlight) | | |
| Touch Screen | | | |
| Touch Type | ▪ Resistive 5-wire | ▪ Projected Capacitive | ▪ Glass Screen |
| Physical | | | |
| Dimension (W x D x H) | ▪ 605 x 373 x 63.2 mm | | |
| Weight Information | ▪ 6.92 kg | ▪ 6.64 kg | |
| Mechanical Construction | ▪ Die-Casting Flat Surface | | |
| Environment | | | |
| Front Panel Protection | ▪ IP 65 Compliant | | |
| Operating Temperature | ▪ Ambient with Air flow: -20°C to 70°C (with Industrial Grade Peripherals) | | |
| Storage Temperature | ▪ -30°C to 80°C | | |
| Relative Humidity | ▪ 80% RH @ 50°C (Non-condensing) | | |
| Vibration | | ▪ Operating, 1 Grms, 10-500 Hz, 3 Axes (w/P2012E only, according to IEC60068-2-6) | |
| EMC | ▪ CE, UKCA, FCC, ICES-003 Class A | | |
| Safety | ▪ UL, cUL, CB, IEC, EN 62368-1 | | |

M1101 Specifications


| Model Name | M1101 |
|-------------------------------------|--|
| Graphics | |
| HDMI-in | • 1x HDMI Connector (1920 x 1080 @60Hz) |
| DP-in | • 1x DisplayPort Connector (1920 x 1080 @60Hz) |
| VGA-in | • 1x VGA Connector (1920 x 1080 @60Hz) |
| Audio | |
| Audio input | • 1x Audio Line in, Phone Jack 3.5mm |
| I/O | |
| COM | • 1x RS-232, DB9 |
| USB | • 1x 480Mbps USB 2.0, Type A |
| Other Function | |
| OSD Button | • Menu, Auto, LCD On/Off, Brightness Up, Brightness Down |
| Internal Speaker | • AMP 2W + 2W |
| Status LED Indicator | • Power LED, Standby LED |
| Power | |
| Power Input | • 9 - 48VDC, 3-pin Terminal Block |
| Physical | |
| Dimension (W x D x H) | • 204.5 x 149 x 38.5 mm |
| Weight Information | • 1.2 kg |
| Mechanical Construction | • Extruded Aluminum with Heavy Duty Metal |
| Mounting | • VESA / CDS Mounting |
| Physical Design | • Fanless Design • Jumper-less Design |
| Reliability & Protection | |
| Reverse Power Input Protection | • Yes |
| Over Voltage Protection | • Protection Range: 51~58V • Protection Type: shut down operating voltage, re-power on at the preset level to recover |
| Over Current Protection | • 15A |
| MTBF | • 1,217,359 hrs - Database: Telcordia SR-332 Issue 3, Method 1, Case 3 |
| Environment | |
| Operating Temperature | • -20°C to 70°C * Ambient with air flow * According to IEC60068-2-1, IEC60068-2-2, IEC60068-2-14 |
| Storage Temperature | • -20°C to 75°C |
| Relative Humidity | • 95%RH @ 70°C (non-Condensing) |
| Shock | • Operating, 15 Grms (according to IEC60068-2-27) |
| Vibration | • Operating, 1.5 Grms, 5-500 Hz, 3 Axes (according to IEC60068-2-64) • Operating, 1 Grms, 10-500 Hz, 3 Axes (according to IEC60068-2-6) |
| EMC | • CE, UKCA, FCC, ICES-003 Class A • EN61000-6-4, EN61000-6-2 (24VDC Input Only) |
| Safety | • UL, cUL, CB, IEC, EN 62368-1 |

CV-W124/M1101 External Layout


Front I/O




Rear I/O

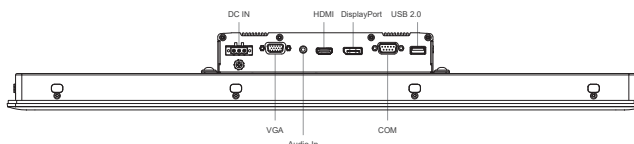


Left I/O



Right I/O

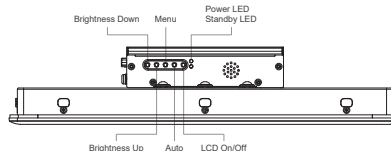

CV-W124/M1101 Dimensions

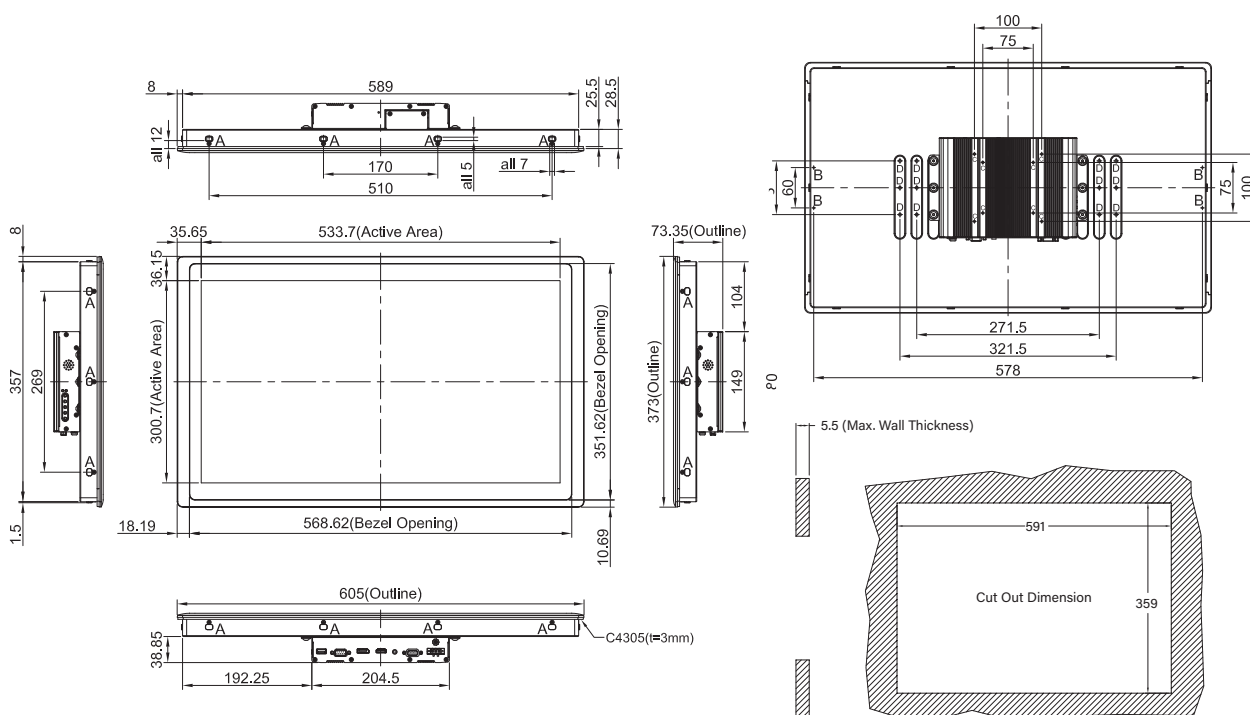

Unit: mm

Ordering Information

Available Models

| Model No. | Description |
|------------------------|---|
| CV-W124R-R10/M1101-R10 | 24" TFT Full HD 16:9 Touch Monitor with Resistive 5-wire Touch, 1x DisplayPort, 1x HDMI, 1x VGA |
| CV-W124C-R11/M1101-R10 | 24" TFT Full HD 16:9 Touch Monitor with Projected Capacitive Touch, 1x DisplayPort, 1x HDMI, 1x VGA |
| CV-W124G-R10/M1101-R10 | 24" TFT Full HD 16:9 Monitor without Touch, 1x DisplayPort, 1x HDMI, 1x VGA |

Model Configuration

| | CV-W124R | CV-W124C | CV-W124G | M1101 |
|----------------|----------|----------|----------|-------|
| CV-W124R/M1101 | V | -- | -- | V |
| CV-W124C/M1101 | -- | V | -- | V |
| CV-W124G/M1101 | -- | -- | V | V |

V : Compatible

Package Checklist

- | | |
|--|--------------------------------------|
| • CV-W124/M1101 Series Touch Monitor x 1 | • Panel Mounting Kit x 1 |
| • USB Cable x 1 | • Power Terminal Block Connector x 1 |
| • VGA Cable x 1 | • Screw Pack x 1 |

Optional Accessories

| Model No. | Description |
|---------------|---|
| GST60A12-CIN1 | Adapter AC/DC 12V 5A 60W, GST60A12-CIN1, wide temp(-30°C ~ +70°C) |
| GST120A24-CIN | Adapter AC/DC 24V 5A 120W with 3pin Terminal Block Plug and Tubes, Level VI |
| URM01 | Universal 19" Rack Mount Kit for Industrial Panel PC & Industrial Monitor |

Updated: Jul. 27, 2023

© Cincoze Co., Ltd. All Rights Reserved. Specifications subject to change without notice. All product names, logos, and brands are the property of their respective owners. All company, product and service names used in this document are for identification purposes only. The use of these names, logos, and brands does not imply endorsement.

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660