



SEMIL-1300GC Series

Wide-temperature Fanless GPU Computer supporting NVIDIA® Tesla T4/ Quadro P2200 GPU and Intel® Xeon® E or 9th/ 8th-Gen Core™ CPU with M12 connectors



Key Features

- Fanless GPU computer with NVIDIA® Tesla T4/ Quadro P2200
- Guaranteed non-throttling GPU performance up to 62°C ambient
- Intel® Xeon® E or 9th/ 8th-Gen Core™ i7/ i5/ i3 CPU
- Patented 2U 19" chassis for rack or wall-mount*
- Four 802.3at Gigabit PoE+ ports via M12 X-coded connectors
- VGA, USB 2.0 and COM ports via M12 A-coded connectors
- 1x DisplayPort and 3x USB 3.1 Gen1 ports
- 8~48V wide-range DC input with built-in ignition power control
- CE, FCC and EN 50155 certified



[Get Quote](#)

Preliminary

*R.O.C Patent No. 1697759
*CN Patent Pending

Introduction

SEMIL-1300GC series is the world's first wide-temperature fanless edge AI computer supporting NVIDIA® Tesla T4 or Quadro P2200 for demanding environments. Coupled with Intel® Xeon® E or 9th/ 8th-Gen Core™ CPU, the system delivers excellent CPU and GPU performances for modern edge AI applications. SEMIL-1300GC series features Neosys' patented thermal system architecture* to guarantee -25°C to 70°C fanless operation in a rack-mountable or wall-mountable 2U 19" enclosure.

SEMIL-1300GC series features an advanced passive cooling design to ensure operation in high-temperature environments without the GPU throttling. Compatible with a Tesla T4 or Quadro P2200 GPU, users can utilize the scalable GPU performance up to 8.1 TFLOPS in FP32 or 130 TOPS in INT8. It leverages M12 connectors for Gigabit PoE+, USB 2.0, VGA and COM ports to offer rugged cable connectivity. Other high-speed computer I/Os include DisplayPort, USB 3.1 Gen1, optional 10G Ethernet and storage interfaces such as M2, for NVMe SSD and SATA ports, making SEMIL-1300GC expandable and versatile.

The flourishing GPU-powered deep learning systems actualized real-time AI inference applications at the edge, where rough conditions are expected. Combining Tesla T4 or Quadro P2200, wide-temperature fanless design and rugged M12 connectors, the SEMIL-1300GC series reveals unprecedented possibilities of deploying AI to places that have yet to be reached.

Specifications


SEMIL-1341GC		SEMIL-1321GC		SEMIL-1341GC		SEMIL-1321GC	
System Core				Storage Interface			
Processor		Supporting Intel® Xeon® E and 9th/ 8th-Gen CPU (LGA1151 socket) - Xeon E 2278GE (8C/16T) / 2278GEL (8C/16T) / 2176G (6C/12T) - i7-9700E, i7-9700TE, i7-8700, i7-8700T - i5-9500E, i5-9500TE, i5-8500, i5-8500T - i3-9100E, i3-9100TE, i3-8100, i3-8100T					
Chipset		Intel® C246 platform controller hub					
Graphics		Integrated Intel® UHD Graphics 630					
Acceleration GPU		NVIDIA® Tesla T4 for AI inference		NVIDIA® Quadro P2200 for AI inference			
Memory		Up to 64 GB ECC/ non ECC DDR4-2666/ 2400 SDRAM (two SODIMM sockets)					
AMT		Supports AMT 12.0					
TPM		Supports TPM 2.0					
I/O Interface							
PoE+		1x IEEE 802.3at (25.5W) Gigabit PoE+ ports by Intel® I219 (M12 X-coded) 3x IEEE 802.3at (25.5W) Gigabit PoE+ ports by Intel® I210 (M12 X-coded)					
10 GbE Port (Build Option)		Optional: 1x 10 GbE port by Intel® X550AT controller (M12 X-coded)**					
Native Video Port		1x VGA (M12 A-coded), supporting 1920 x 1200 resolution 1x DisplayPort connector, supporting 4096 x 2304 resolution					
Series Port		2x 3-wires RS-232 ports COM1 & COM2 (M12 A-coded) 1x software-programmable RS-232/ 422/ 485 port (COM3, DB9) 1x RS-232 port (COM4, DB9)					
USB		3x USB 3.1 Gen1 2x USB 2.0 (M12 A-coded) 1x USB 2.0 (internal)					
Audio		1x 3.5 mm jack for mic-in and speaker-out					
Storage Interface							
SATA HDD		2x Internal SATA port for 2.5" HDD/ SSD installation, supporting RAID 0/ 1					
mSATA		2x full-size mSATA port (mux with mini-PCIe)					
M.2		1x M.2 2280 M key socket (PCIe Gen3 x4) for NVMe SSD or Intel® Optane™ memory installation					
Expansion Bus							
Mini PCI-E		2x full-size mini PCI Express sockets (mux with mSATA) 1x M.2 3042/ 3052 B key socket for selected M.2 4G/ 5G module 1x M.2 2242/ 2252 E key for selected WiFi module					
Power Supply							
DC Input		8~48V DC input					
Ignition Control		Built-in ignition power control					
Mechanical							
Dimension		440mm (W) x 310mm (D) x 86.5mm (H) (excl. rack-mount bracket)					
Weight		12 kg					
Mounting		Rack-mounting and wall-mounting					
Environmental							
Operating Temperature		with 35W CPU -40°C ~ 70°C **** with >= 65W CPU -40°C ~ 70°C ***/ **** (configured as 35W TDP mode) -40°C ~ 50°C ***/ **** (configured as 65W TDP mode)					
mSATA		10%~90% , non-condensing					
Storage Temperature		-40°C ~ 85°C					
Humidity		10%~90% , non-condensing					
Vibration		MIL-STD-810G, Method 514.7, Category 4					
Shock		MIL-STD-810G, Method 516.7, Procedure I					
EMC		EN-50155, CE/FCC Class A, according to EN 55032 & EN 55035					
** For optional 10GbE support, please contact Neousys Technology *** For Xeon E 2176G/ 2278GE, i7-9700E, and i7-8700 running at 65W mode, the highest operating temperature shall be limited to 50°C and thermal throttling may occur when sustained full-loading applied. Users can configure CPU power in BIOS to obtain higher operating temperature.							

** For optional 10GbE support, please contact Neosys Technology
*** For Xeon E 2176G/ 2278GE, i7-9700E, and i7-8700 running at 65W mode, the highest operating temperature shall be limited to 50°C and thermal throttling may occur when sustained full-loading applied. Users can configure CPU power in BIOS to obtain higher operating temperature.
**** For sub-zero operating temperature, a wide temperature HDD or Solid State Disk (SSD) is required


SEMIL-1300GC Series



Appearance

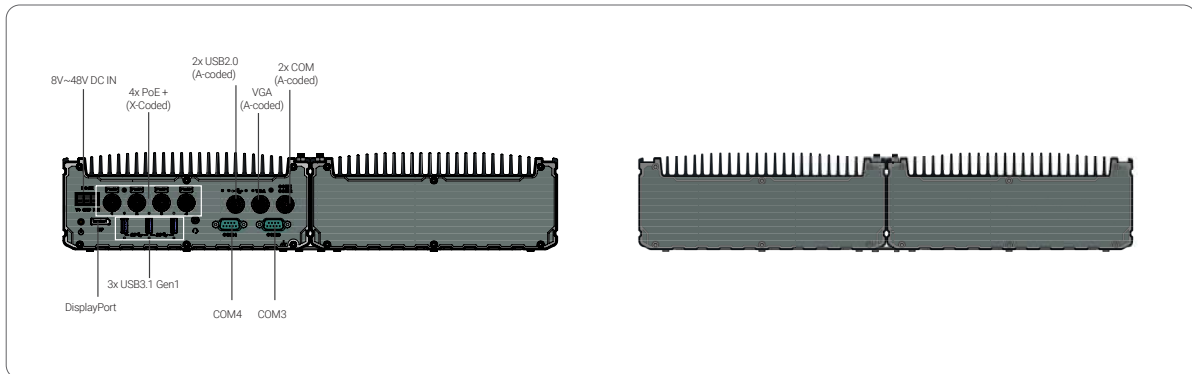

Dimensions

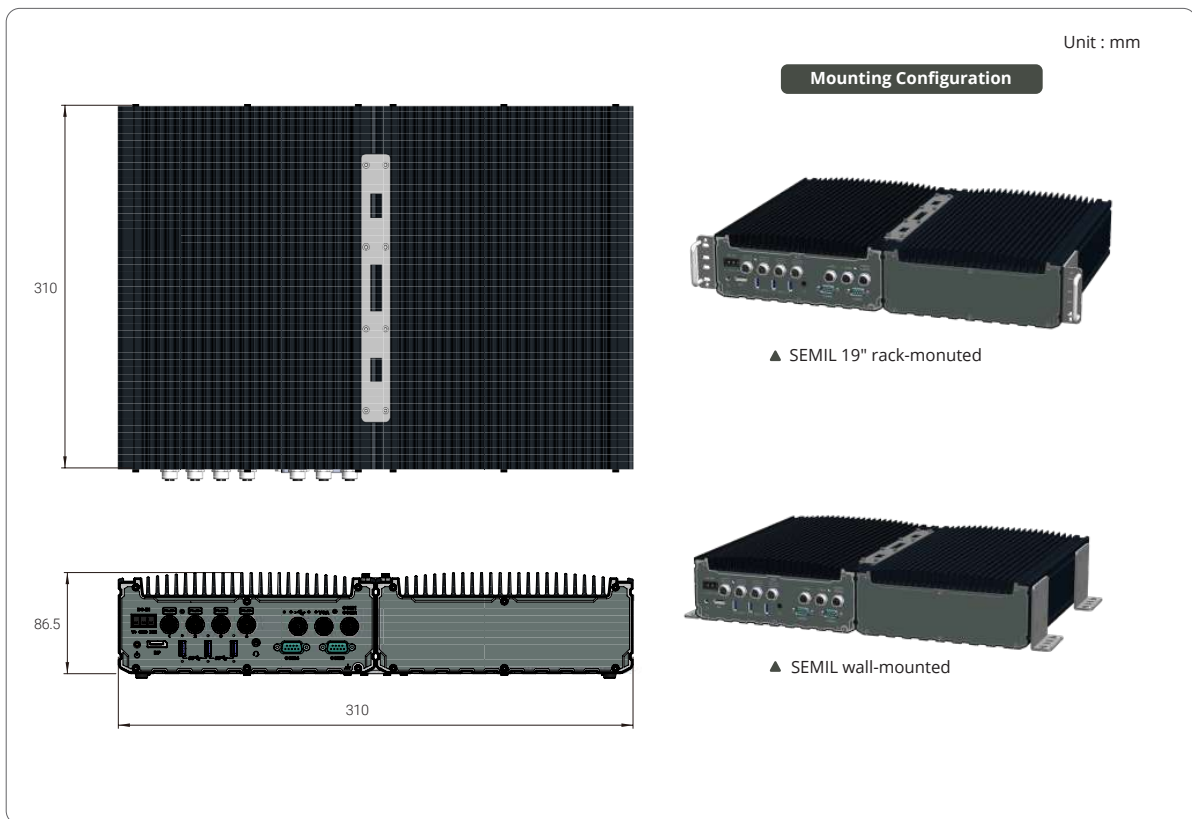

Ordering Information

Model No.	Product Description
SEMIL-1341GC	Wide-temperature fanless GPU computer with NVIDIA® Tesla T4 GPU and Intel® Xeon® E or 9th/ 8th-Gen Core™ CPU with M12 connectors
SEMIL-1321GC	Wide-temperature fanless GPU computer with NVIDIA® Quadro P2200 GPU and Intel® Xeon® E or 9th/ 8th-Gen Core™ CPU with M12 connectors

Optional Accessories

M12-Cable-Kit	4x PoE+, VGA, 2x USB2.0 (by Y-cable), 2x COM (by Y-cable) and DC power cables
PA-280W-ET2	280W AC/ DC power adapter 24V/ 11.67A; 16AWG/ 100cm; cord end terminals for terminal block, operating temperature: -30°C to 60°C.

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660