

Surveillance/ Video Analytics



# NRU-120S Series

NVIDIA® Jetson AGX Xavier™ AI NVR for Intelligent Video Analytics



CE FCC

## Key Features

- Powered by NVIDIA® Jetson AGX Xavier™ SOM bundled with JetPack 4.4
- 4x IEEE 802.3at Gigabit PoE+ ports with screw-lock
- 2x front-accessible, hot-swappable 2.5" HDD trays
- 1x M.2 2280 M key socket for NVMe SSD
- 1x mini PCIe socket for WIFI/4G module
- 1x isolated CAN bus port and 1x RS232 port with flow control
- 1x GPS PPS input, 3-CH isolated DI and 4-CH isolated DO
- 8V to 35V wide-range DC input with built-in ignition power control

[Contact Neosys](#)

[Get Quote](#)

## Introduction

NRU-120S series is a new rugged edge AI-based video analytics solution capable of video recording, transcoding, real-time inference, etc. Powered by NVIDIA® Jetson AGX Xavier™ system-on-module (SOM), it comprises of an 8-core ARM CPU and NVIDIA Volta GPU with 512 CUDA cores and 64 Tensor cores that offer 11 TFLOPS FP16 or 22 TOPS INT8 computing power.

Benefiting from the low-power design of NVIDIA® Jetson AGX Xavier™, NRU-120S offers significant inference performance while consuming only 30W of power. The efficient power design and the compact form factor make it the perfect edge AI solution for both stationary and mobile applications.

NRU-120S offers four 802.3at Gigabit PoE+ ports; each port can supply up to 25.5W of power to PD devices such as IP cameras and industrial cameras. In addition to 32GB eMMC on the Xavier module, NRU-120S further incorporates two front-accessible, hot-swappable 2.5" HDD/ SSD tray for expanding storage capacity and an M.2 2280 NVMe socket for fast SSD read/write performance. It also has one mini-PCIe socket for WIFI and 4G module, as well as 1 GPS PPS input, 3-CH isolated DI and 4-CH isolated DO for communication with external devices.

By integrating PoE+ connectivity, a wide range of NVIDIA AI tools, and modern deep learning frameworks, NRU-120S pushes real-time image and video inference to the edge. It is a one-stop AI-based video analytics solution that offers 802.3at PoE+ camera connections, video decoding, video streaming, video recording, and edge AI inference. With Neosys' unique damping bracket design, ignition power control, and wide voltage power supply, NRU-120S is an ideal video inference platform for autonomous machines, predictive maintenance, law enforcement, and smart city applications.

## Specifications

### System Core

Processor	Supporting NVIDIA® Jetson AGX Xavier™ system-on-module, comprising of NVIDIA® Volta GPU and Carmel CPU
Memory	32GB LPDDR4x @ 2133 MHz on SOM
eMMC	32GB eMMC 5.1 on SOM

### I/O Interface

PoE+	4x IEEE 802.3at (25.5W) Gigabit PoE+ ports by Intel® I350
CAN	1x isolated CAN 2.0 port
Isolated DIO	1x GPS PPS input, 3-CH isolated DI and 4-CH isolated DO
USB	3x USB 3.1 Gen1 (5 Gbps) ports
Video Port	2x DisplayPort, supporting 3840x2160 at 60Hz
Serial Port	1x RS-232 port with flow control

### Storage Interface

SATA HDD	2x hot-swappable HDD tray for 2.5" HDD/SSD installation (up to 9.5mm height)
M.2 NVMe	1x M.2 2280 M key socket (PCIe Gen3 x2) for NVMe SSD

### Internal Expansion Bus

Mini PCI Express	1x full-size mini PCI Express socket with internal SIM socket
------------------	---

### Power Supply

DC Input	1x 3-pin pluggable terminal block for 8V to 35V DC input (IGN/ GND/ V+)
----------	---

### Mechanical

Dimension	230 mm (W) x 173 mm (D) x 66 mm (H)
Weight	2.7 kg (excluding damping bracket)
Mounting	Wall-mount with damping brackets (Standard)

### Environmental

Operating Temperature	-25°C ~ 50°C with passive cooling (MAX TDP mode) * -25°C ~ 70°C with passive cooling (30W TDP mode) * -25°C ~ 70°C with optional fan kit (all modes) *
-----------------------	--

Storage Temperature	-40°C ~ 85°C
---------------------	--------------

Humidity	10% ~ 90%, non-condensing
----------	---------------------------

Vibration	Operating, MIL-STD-810G, Method 514.6, Category 4
-----------	---

Shock	Operating, MIL-STD-810G, Method 516.6, Procedure I, Table 516.6-II
-------	--


EMC	CE/FCC Class A, according to EN 55032 & EN 55024
-----	--

\* For sub-zero and over 60°C operating temperature, a wide temperature HDD or Solid State Disk (SSD) is required.

NRU-120S Series



## Appearance

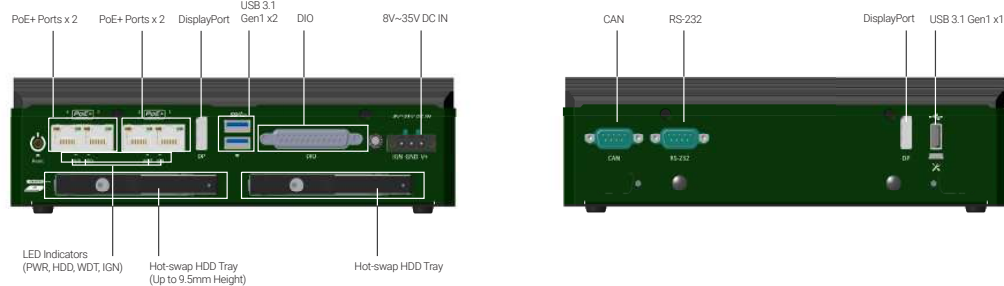

## Dimensions



## Ordering Information

Model No.	Product Description
NRU-120S	NVIDIA® Jetson AGX Xavier™ AI NVR for Intelligent Video Analytics
NRU-120S-F	NVIDIA® Jetson AGX Xavier™ AI NVR for Intelligent Video Analytics with Fan Kit

## Optional Accessories

PA-160W-OW	160W AC-DC power adapter, 20V/8A; 18AWG/120cm; cord end terminals for terminal block, operating temperature : -30 to 70°C.
PA-120W-OW	120W AC/DC power adapter, 20V/6A; 18AWG/120cm; cord end terminals for terminal block, operating temperature : -30 to 70°C.
Fan kit	Fan kit with 92mm x 92mm fan for NRU-120S series

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660