



SUPERIOR AI EDGE COMPUTING SYSTEM

RCO-6000-CFL-4NH

Superior AI Edge Computing System W/ LGA 1151 for Intel 8th/9th Gen CPU & Q370 PCH, 4 Bay U.2 15mm



SPECIFICATIONS

System

Processor

Support 8th/9th Gen Intel® CFL-R S Processor (LGA 1151, 65W/35W TDP)

- Intel® Core™ i7-9700E, 8 Cores, 12MB cache, up to 4.4 GHz
- Intel® Core™ i5-9500E, 6 Cores, 9MB Cache, up to 4.2 GHz
- Intel® Core™ i3-9100E, 4 Core, 6MB Cache, 3.7 GHz
- Intel® Core™ i7-9700TE, 8 Cores, 12MB cache, up to 3.8 GHz
- Intel® Core™ i5-9500TE, 6 Cores, 9MB Cache, up to 3.6 GHz
- Intel® Core™ i3-9100TE, 4 Core, 6MB Cache, 3.2 GHz
- Intel® Core™ i7-8700T, 6 Cores, 12MB cache, up to 4.0 GHz
- Intel® Core™ i5-8500T, 6 Cores, 9MB Cache, up to 3.5 GHz
- Intel® Core™ i3-8100T, 4 Cores, 6MB Cache, 3.1 GHz
- Intel® Pentium® G5400T, 2 Cores, 4MB Cache, up to 3.1 GHz
- Intel® Celeron® G4900T, 2 Cores, 2MB Cache, up to 2.9 GHz

System Chipset Intel® Q370 Express Chipset

LAN Chipset GbE1: Intel I219LM (Support Wake-on-LAN and PXE)
GbE2: Intel I210-AT (Support Wake-on-LAN and PXE)

Audio Codec Realtek ALC888S

System Memory 2x 260-Pin DDR4 2400/2666MHz SODIMM.
Max. up to 64GB (Un-buffered and Non-ECC)

BIOS AMI 256Mbit SPI BIOS

Watchdog Software Programmable Supports 1~255 sec. System Reset

TPM TPM 2.0

Display

Graphics Intel® UHD Graphics 610/630

DVI 1x DVI-I, support resolution 1920 x 1200

DisplayPort 2x DisplayPort, support resolution 4096 x 2304

Multiple Display 3 Display interfaces

Storage

SSD/HDD 2x Internal 2.5" SATA HDD Bay (support H=9.5mm)
2x Removable 2.5" SATA HDD Bay
(support H=7mm, hot-swappable) Support RAID 0, 1, 5, 10

NVMe 2x Removable 2 Bay NVMe SSD Module with Hardware
RAID 0, 1, 5, 6, 10 support (Support H=15mm)

mSATA 1x mSATA (Shared by 1x Mini PCI Express)

M.2 1x M.2 (M Key, PCIe x4, 2280, Support NVMe)
1x M.2 (E Key, PCIe x2, 2230, USB 2.0, Support CNVi)

SIM Socket 2x External SIM socket

Expansion

Mini PCI Express 2x Full-size Mini PCIe (1x shared by 1x mSATA)

4-Port GbE (Optional) 4-port GbE module with Intel® I350-AT4 Chipset,
RJ-45 or M12 connector (PoE optional)
Occupied one Universal I/O Slot

2-Port GbE (Optional) 2-Port RJ45 10GbE with Intel X710-AT2 Chipset
Occupied one Universal I/O Slot

4-Port USB (Optional) 4-Port USB with Renesas uPD720201K8 host controller
Occupied one Universal I/O Slot

FEATURES

- LGA 1151 socket for 8th/9th Gen. Intel® CFL-R S Processor
Pentium® / Celeron® Desktop Processor
- Intel® Q370 chipset
- 2x 260-pin DDR4 SODIMM. Max. up to 64GB
- Triple Independent Display by 1x DVI-I and 2x DisplayPort
- 2x Intel® GbE supporting Wake-on-LAN and PXE
- 2x Removable 2 Bay NVMe SSD Module with Hardware RAID 0, 1, 5, 6, 10
support (Support H=15mm)
- 4x 2.5" SATA HDD Bay and 2x mSATA with RAID 0, 1, 5, 10 support
- 1x M.2 (M Key, PCIe x4, 2280, Support NVMe)
- 1x M.2 (E Key, PCIe x2, 2230, USB 2.0, Support CNVi), 2x SIM socket
- 9 to 48VDC Wide Range Power Input Supporting AT/ATX Mode
- Wide Operating Temperature [-25°C to 60°C]
- Power ignition management

5G (Optional)	1x M.2 for 5G (B Key, PCIe x4, USB 3.0, 3042/3052) Including 2x SIM socket, 1x SIM switch Occupied one Universal I/O Slot
---------------	---

I/O

COM	4x RS-232/422/485 ; 2x RS-232/422/485 (internal)
-----	--

USB	4x USB 3.2 Gen 2 (10 Gbps) ; 5x USB 3.2 Gen 1 (5 Gbps, internal) ; 1x USB 3.2 Gen 1 header (5 Gbps, internal)
-----	---

LAN	2x RJ45
-----	---------

Audio	1x Mic-in, 1x Line-out
-------	------------------------

DIO	8 in / 8 out (Isolated)
-----	-------------------------

Universal I/O Bracket	1x Universal I/O Bracket (By mini PCIe interface)
-----------------------	---

Others	5x WiFi Antenna Holes 1x Power Switch, 1x AT/ATX Switch, 1x Remote Power On/Off 1x PC/Car Mode Switch, 1x Delay Time Switch 1x Removable CMOS Battery
--------	--

Windows	Windows 10
---------	------------

Linux	Linux kernel 5.X
-------	------------------

Power

Power Mode	AT, ATX
------------	---------

Power Supply Voltage	9~48VDC
----------------------	---------

Power Ignition Sensing	Power Ignition Management
------------------------	---------------------------

Power Connector	3-pin Terminal Block, 4-pin Terminal Block for Storage (12V requires 4-pin terminal block)
-----------------	---

Power Adaptor	Optional AC/DC 24V/9.2A, 220W Optional AC/DC 24V/11.27A, 280W
---------------	--

Power Protection	OVP (Over Voltage Protection); OCP (Over Current Protection) Reverse Protection
------------------	--

Environment

Operating Temp.	-25°C to 60°C (35W/65W CPU)
-----------------	-----------------------------

Storage Temp.	-30°C to 85°C
---------------	---------------

Relative Humidity	10% to 95% (non-condensing)
-------------------	-----------------------------

Vibration	With SSD: 3 Grms, 5 - 500 Hz, 0.5 hr/axis With HDD: 1 Grms, 5 - 500 Hz, 0.5 hr/axis
-----------	--

Shock	With SSD: 20G, half sine, 11ms
-------	--------------------------------

Standards / Certification	CE, FCC Class A, E-Mark, EMC Conformity with EN 50155, EN 50121-3-2
------------------------------	--

Physical

Construction	Extruded Aluminum with Heavy Duty Metal
--------------	---

Dimension	261 (D) x 240 (W) x 168 (H)
-----------	-----------------------------

Weight	10.2 kg
--------	---------

Mounting	Wall Mounting
----------	---------------


* For 8th/9th CPUs configured to run at 65W, operating temperatures will be limited to 60°C.

** 65W CPUs may experience thermal throttling depending on extreme application workloads; this is also due to an increase in the physical CPU cores from the Intel silicon (up to 8 cores). Please note, this does not indicate system malfunction or problems in the fanless design. Please consult our embedded engineers for the best configuration to match your application requirements.

*** All specifications and photos are subject to change without notice.


RCO-6000-CFL-4NH

EXTERNAL I/O MECHANICAL LAYOUT

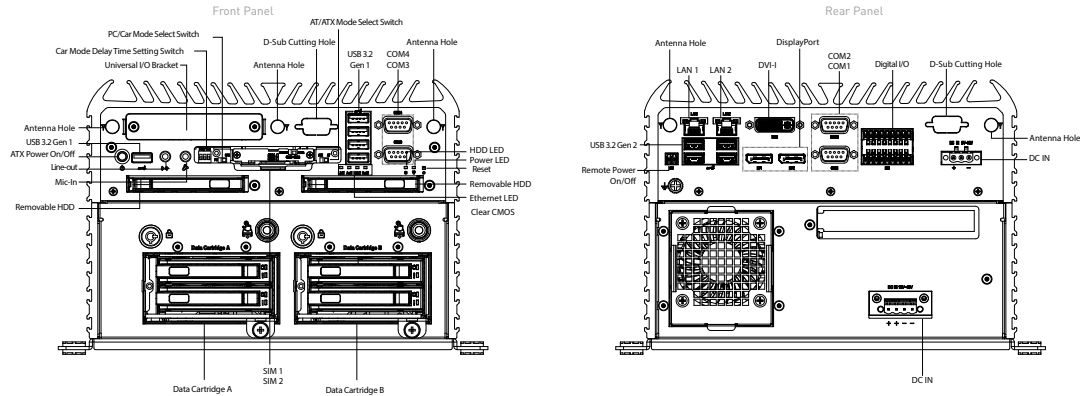

DIMENSION

Unit: mm

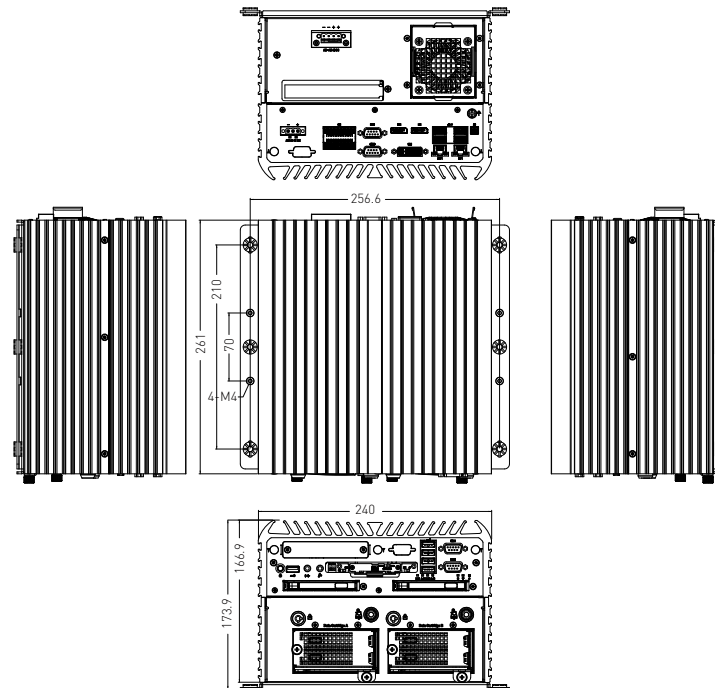

ORDERING INFORMATION

MODEL NO.	DESCRIPTION
1-E09A22102	Adapter AC/DC 24V 9.2A 220W with 3pin Terminal Block Plug 5.0mm Pitch
1-E09A22801	Adapter AC/DC 24V/11.67A 280W with 3pin Terminal Block Plug 5.0mm Pitch
1-TPCD00005	Power Cord, 3-pin US Type, 180cm
1-TPCD00002	Power Cord, European Type, 180cm
1-TPCD00001	Power Cord, 3-pin UK Type, 180cm

PACKING LIST

- 1x RCO-6000-CFL-4NH Series Embedded System
- 1x Wall Mount Kit
- 1x Accessory Kit
- 1x DVI to VGA Adapter

AVAILABLE MODELS

MODEL NO.	DESCRIPTION
RCO-6000-CFL-4NH	Superior AI Edge Computing System W/ LGA 1151 for Intel 8th/9th Gen CPU & Q370 PCH, 4 Bay U.2 15mm

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660