

LNP-0800 Series

8-Port Industrial PoE+ Unmanaged Ethernet Switch with 8*10/100Tx (30W/Port)



Features


- ▶ 8-Port IEEE 802.3at compliant PoE+ (30W/Port)
- ▶ Supports Auto MDI/MDI-X Function
- ▶ Store-and-Forward Switching Architecture
- ▶ 2K MAC Address Table
- ▶ Network Broadcast Storm Protection
- ▶ EFT Protection: 2,000 VDC Support
- ▶ ESD Protection: 6,000 VDC Support
- ▶ Redundant Power Input Design: 48~55VDC
- ▶ Built-in 1 relay output for Port Break Alarm
- ▶ IP30 Rugged Aluminum Case Design
- ▶ DIN-Rail and Wall Mount Support
- ▶ Operating Temperature Range - STD: -10° to 70°C, EOT: -40° to 75°C
- ▶ 5-Year Warranty

INTRODUCTION

Antaira Technologies' LNP-0800 series is an industrial PoE+ unmanaged Ethernet switch featuring 8*10/100Tx PoE+ ports. Each power over Ethernet (PoE+) port supports an IEEE 802.3at high power PoE+ output up to 30W per port, making it ideal for applications that demand a PoE+ power source.

The LNP-0800 series is IP30 rated and DIN-rail mountable. There are also two wide operating temperature models for either a standard temperature range (STD: -10°C to 70°C) or an extended temperature range (EOT: -40°C to 75°C). The series provides Ethernet connectivity with PoE+ functions ideal for outdoor or harsh industrial application environments, such as, security surveillance, ITS-traffic monitoring systems, facility management for power/utility, water wastewater treatment plants, and automated production lines in factory automation.

DIMENSIONS

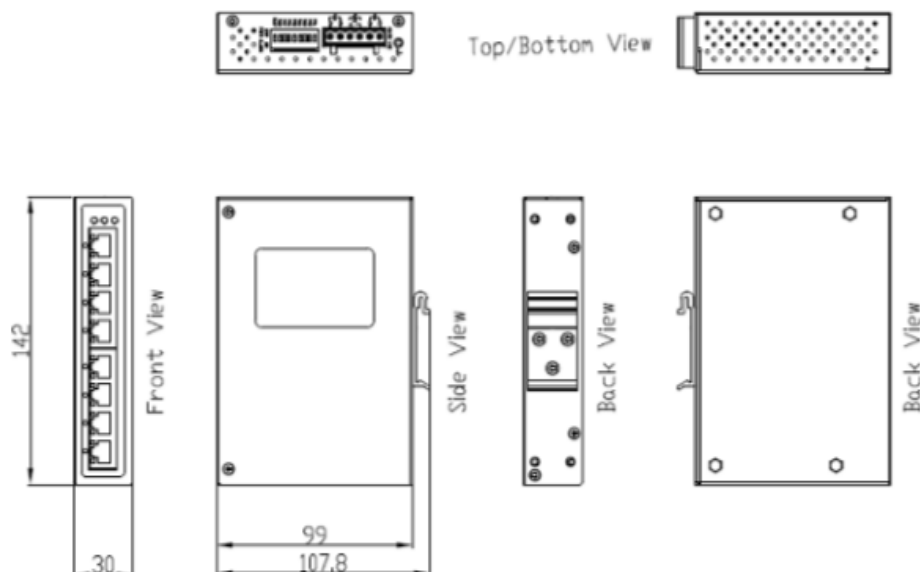

SPECIFICATIONS

Technology	
Standards	IEEE 802.3 10BaseT Ethernet
	IEEE 802.3u 100BaseTX Fast Ethernet
	IEEE 802.3x Flow Control and Back-Pressure
	IEEE 802.3at Power over Ethernet
Processing Type	Store and Forward
Protocol	CSMA/CD
Flow Control	IEEE 802.3x back pressure flow control
Switch Properties	
Switch Architecture	Back-Plane (Switching Fabric): 1.0Gbps
Transfer Rate	14,880pps for Ethernet Port
	148,800pps for Fast Ethernet Port
Jumbo Frame	-
MAC Table	2K
Interface	
Ethernet RJ45 Port	10/100BaseT(X) auto negotiation speed, Full/Half duplex mode, and auto MDI/MDI-X connection 8*10/100Tx (PoE+)
Fiber Port	-
PoE Port Pin Assignment	V+, V+, V-, V-, for pin 1, 2, 3, 6 (Endspan, MDI-X Alternative A)
Protection	
Housing	Metal IP30 rated
Dimensions	30 x 142 x 99 mm
Weight	Unit: 1.1 lbs; Shipping: 1.45 lbs
Mounting	DIN-Rail; Wall-mounting (included)

Power Requirement	
Input Voltage & Power Connection	48~55VDC, Redundant Input w/ removable 4-contact terminal block
Reverse Polarity Protection	Present
Overload Current Protection	Slow-Blown Fuse
PoE Power Output	25W @ 48VDC (per PoE port)
	30W @ 51~55VDC (per PoE port)
Power Consumption	210 Watts @ 48VDC
	250 Watts @ 51~55VDC
Environmental Limits	
Operating Temperature	STD: -10° to 70° C
	EOT: -40° to 75° C
Storage Temperature	-40°C ~ 85°C
Ambient Relative Humidity	5 to 95%, (non-condensing)
Regulatory Approvals	
EMI	FCC Class A
EMS	EN6100-4-2,3,4,5,6,8
	EN6100-6-2,4
Free Fall	IEC60068-2-32
Shock	IEC60068-2-27
Vibration	IEC60068-2-6
Green	RoHS Compliant
Certifications	FCC, CE, UL 508, UL Class 1 Division 2, ISA 12.12.01
Warranty	5 Years

ORDERING INFO

LNP-0800	8-Port Industrial 802.3at PoE+ Unmanaged Ethernet Switch with 8*10/100Tx (30W/Port)
LNP-0800-T	8-Port Industrial 802.3at PoE+ Unmanaged Ethernet Switch with 8*10/100Tx (30W/Port), EOT: -40° to 75°C
Optional Accessories	
DR-75-48	75W Industrial DIN-Rail Power Supply
SDR-120-48	120W Industrial DIN-Rail Power Supply
SDR-240-48	240W Industrial DIN-Rail Power Supply
SDR-480-48	480W Industrial DIN-Rail Power Supply

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660