


Railway Computer

COMPACT RML-R Series

Embedded Railway Computer with Intel® Atom™ E3900 processor

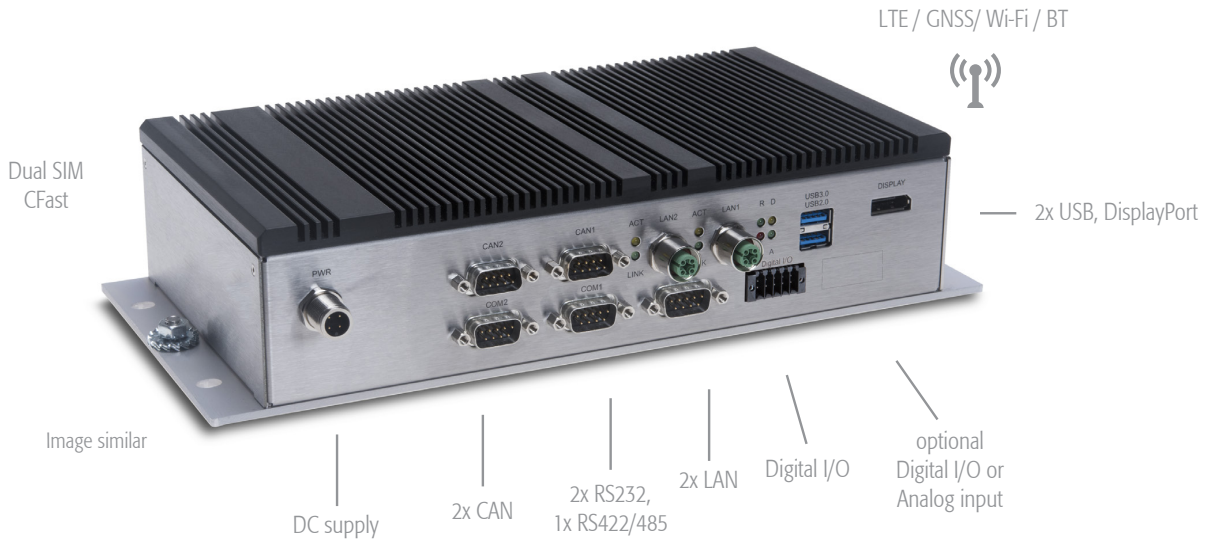

Railway Computer

IPC/RML-R 81

This fanless RML-R COMPACT81 generation is based on the Intel® Atom™ E3900 (Apollo Lake) processor technology and offers a wide range of interface options. The robust and uncompromising industrial design allows the implementation in the most demanding rolling stock applications and guarantees long term availability.

- **Railway approved (EN50155 & EN45545)**
- **24/7 continuous operation**
- **M12 connectors for Power and LAN**
- **Shock and vibration resistant**
- **Full -40...+85°C on component level**



Product Highlights

Power Ignition controller
Inertial Measurement Unit (IMU)
GNSS with dead reckoning
Fanless, No moving parts
Maintenance free
Long term availability

Product Features

Intel® Atom™ E3900 Series
up to 2.0GHz, 4 Cores
RAM soldered on board 8GB
Socket for CFast storage card
Gbit Ethernet, USB 3.1, RS232, CAN
Digital I/Os
Optional 5G, 4G, Wi-Fi & Bluetooth options
Rugged M12 connectors
Stainless steel housing
Protection class IP40

Markets / Applications

Railway (rolling stock)
Transportation

Order Code IPC/RML81I20-R152E¹

Processor / Performance

Intel® Atom™ x7-E3950 2.00GHz (Burst) 1.6GHz Clock - Quad Core 8GB RAM	•
Intel® Atom™ x5-E3940 1.80GHz (Burst) 1.6GHz Clock - Quad Core 4GB RAM	optional

Memory

L2 cache	2MB
RAM DDR3L 1866MT/s soldered on board	8GB

Features

Inertial measurement unit (IMU) STMicroelectronics ISM330DHCXTR	•
Real time clock (RTC) with goldcap backup (holds charge for 48h)	•
Hardware watchdog & Temperature supervisor	•
Intelligent power management (Ignition controller)	•
TPM 2.0 according to ISO/IEC11889 Infineon SLB9665	•

Communication Interfaces

DisplayPort 1.4 (up to 7680 x 4320 @ 60Hz)		1
USB version 3.1	(Type A)	1
USB version 2.0	(Type A)	1
Ethernet 10/100/1000 BASE-T (Intel I210-IT)	(M12 female x-coded)	2
CAN 2.0A/2.0B & CAN FD (PEAK FPGA chip, SJA1000 compatible), isolated, The CAN signals give no network feedback and are attached via non-volatile I/O port on the I2C bus	(DSUB9)	2
Serial RS232, isolated	(DSUB9)	2
Serial RS422/485	(DSUB9)	1
Digital I/O, 24VDC (latency <1ms)	(Weidmüller terminal block)	4 inputs, 4 outputs
Analog input, 16bit resolution, voltage input: -10 ... +10V / 0 ... 30V or current input: 0-20mA ^{Accuracy: +/- 0.1%}		optional
CFast socket with retention frame ²		1
M.2 Key B socket ²	(M.2 3042)	1
M.2 Key E socket ²	(M.2 2230)	1
Mini PCIe socket ²		1
MicroSD Card socket ²		1
Buzzer ²		1
I2C bus ²		1

Wireless Connectivity

Cellular 4G module (3G/2G fallback) Sierra Wireless EM7455 - M2M only! with dual nano SIM support		2x SMA
Wireless LAN IEEE 802.11ac/a/b/g/n/ dual-band 2x2 MIMO SparkLAN WxxB-263ACNI(BT)		2x RP-SMA
GNSS positioning module with dead reckoning u-blox NEO-M9 Module ³		1x SMA
Cellular 5G module (4G/3G fallback) Sierra Wireless EM9191 - M2M only!	(2x SMA)	optional
High accuracy GNSS positioning module w/ RTK support u-blox ZED F9P/F9R module	(1x SMA)	optional

Technical Data

Exterior dimensions [mm]		w262 x h64 x d137
Net weight [gram]		~ 1900
Input voltage (isolated and reverse polarity protected)	(M12 4P male a-coded)	16.8 ... 45VDC
Wide input voltage 14.4 .. 137.5VDC (isolated and reverse polarity protected)	(M12 4P male a-coded)	optional
Uninterruptible power supply (UPS), interruption time of supply voltage		~ 10-15s
Current consumption typ. in mA @ 24V without Add-Ins, idle		~ 500
Power consumption typ. in Watt @ 24V without Add-Ins, idle		~ 12

Environmental Conditions

Operating temperature (complies with EN50155 class OT4) ⁴		-40°C ... +70°C
Storage temperature		-40°C ... +85°C
Ingress Protection standard EN60529		IP40
Conformal coating ⁵		PCX
Shock		IEC/EN 61373
Vibration		IEC/EN 61373
EMI-Conformity		EN 50121-3-2 (IEC 62236-3-2)
Safety (designed to meet)		EN 62368-1
Fire protection		EN45545-2 HL3
Radio and Telecommunication (designed to meet)		RED
MTBF @ 25°C according to Telcordia SR-332, Environment GB, excluding optional extensions		~ 480 000h

¹Please contact factory for minimum order quantities

²Internal connector

³NEO M9 Series, NEO-M9V (with dead reckoning) is planned, however subject to availability the NEO-M9N (without dead reckoning) may be used prior.

⁴Depending on installation situation and interface connection. Please see user documentation.

⁵On all possible components (excl. connectors and wireless devices)

Product specifications subject to change without notice. | All data is for information purposes only and not guaranteed for legal purposes. Information in this data sheet has been carefully checked and is believed to be accurate. However, no responsibility is assumed for inaccuracies. Please refer to the user documentation for additional product specification.

© 2021 Syslogic Datentechnik AG
All rights reserved

Syslogic Datentechnik AG
Täferstrasse 28
CH-5405 Baden Dättwil

Version 0.6 | October 2021

For further information and support:
info@syslogic.com
support@syslogic.com
www.syslogic.com

+41 56 200 90 40 Switzerland (Headquarters)
+49 7741 967 14 20 Germany and Austria

 **syslogic**
industrial computing

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660