

VIKING-924BP


24" 8th Gen. Intel Core i3/i5 Marine Panel PC

Industrial Panel PC

HMI Controller

Industrial Display Monitor

Box PC




Features

- 24" Marine Panel PC
- 8th Gen. Intel Core i3/i5 Processors
- 1 x 260pin SO-DIMM, up to 32G DDR4 2400MHz
- True Flat Bezel Design
- IP66 Front Panel
- Aluminum Enclosure (with Anti-Corrosion Coating)
- DC 24V Power Input with Isolated
- IEC 60945 Marine Certification

Specifications

System	
CPU	Intel Core i3-8145UE (2C/4T, 2.2GHz, 15W TDP) Intel Core i5-8365UE (4C/8T, 1.6GHz, 15W TDP)
System Chipset	SoC
Memory	1 x 260pin SO-DIMM, up to 32G DDR4 2400MHz
TPM	TPM 2.0
IO Port	
USB	4 x USB 3.0 type A 1 x RS-232 (COM1, 5-pin terminal block) 1 x RS-232/422/485 Selectable Default RS-485 (COM 2, 5-pin terminal block)
Serial/Parallel	1 x Display Port 1 x Line-out, Phone Jack 1 x ESD Ground
LAN	2 x GbE RJ-45
Power Connector	1 x 2-pin Terminal Block Connector (for remote power switch) 1 x 3-pin Terminal Block Connector
Front Side I/O	Keypad Capacitive Touch with LED - Power - Brightness+ - Brightness- - Brightness Mode Swap (DAY, DUSK, NIGHT) 1 x Buzzer
Storage Space	
Storage	Default: 1 x M.2 M-Key 2242(option 2280 can't use TB-528 at same time) 1 x 2.5" HDD space (option)
Expansion	
On board expansion bus	1 x TB-528 Expansion Connector (for 19"/24" only) option TB-528C2I for Isolation 2 x RS-422/485 Isolation
Display	
Display Type	24" TFT-LCD
Max. Resolution	1920 x 1080
Max. Color	16.7M
Luminance (cd/m ²)	300
View Angle (H/V)	178(H)/178(V)
Contrast	3000:1
Backlight Lifetime	50,000 hrs
Touch Screen	
Type	Projected Capacitive Touch
Interface	USB
Light Transmission(%)	90%

Dimensions

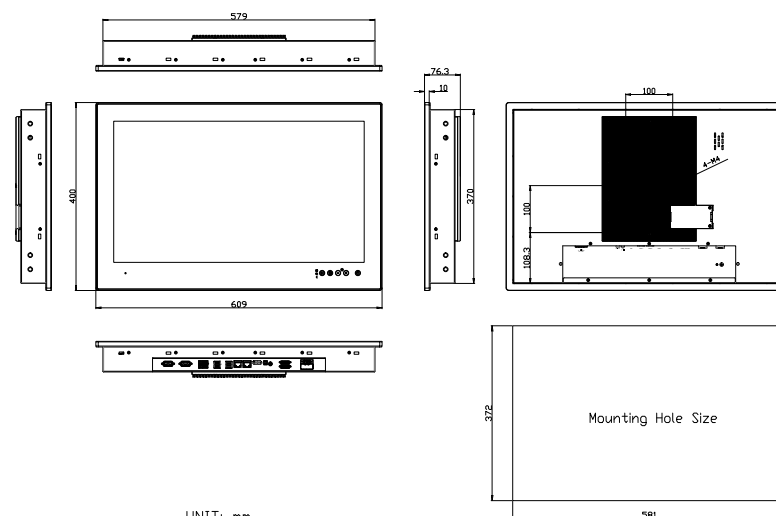

UNIT: mm
Tolerance: ±0.5

Power	
Power Input	DC 24V with Isolated / AC Power option
Power Consumption	VIKING-924BPH : 70W (Max)
Mechanical	
Construction	Black/ Aluminum Bezel and Aluminum Housing (Anti-Corrosion Coating)
Mounting	Panel Mount/ VESA Mount Front Access Mount / Mounting Bracket (option)
Dimensions	609 x 400 x 76.3 mm
Net Weight	7.8 kg
Environmental	
Operating Temperature	0~50°C (WT1: -20~60°C for optional)
Storage Temperature	-30~70°C
Humidity	10 to 90% @ 40°C, non-condensing
IP Rating	Front Panel IP66
Certificate	CE/FCC/IEC 60945
Operating System Support	
Windows 10, Windows 11	

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660