

LMP-0501-XX-V2 Series

5-Port Industrial PoE+ Managed Ethernet Switches
w/4*10/100Tx (30W/Port) and 1*100Fx Multi-Mode/Single
Mode, 48~55VDC Power Input; Version 2 Hardware



Features


- ▶ Supports 4*10/100Tx IEEE 802.3at/af Compliant with 30W/Port and 1*100Fx Fiber Port
- ▶ Network Redundancy: RSTP/MSTP and TG.8032 ERPS (Recovery Time <50ms)
- ▶ Supports IGMP v1/v2/v3, up to 1024 Groups
- ▶ Supports QoS (IEEE802.1p) and CoS/ToS
- ▶ Supports IEEE802.1Q VLAN, SNMP v1/v2c/v3
- ▶ PoE Ping Alarm Function for PoE Ports Power Recycle
- ▶ Redundant Power Input: 48~55VDC
- ▶ Reverse Polarity Protection
- ▶ IP30 Protection
- ▶ DIN-Rail or Wall Mountable
- ▶ Operating Temperature Range
 - STD: -10° to 70°C, EOT: -40° to 75°C
- ▶ 5-Year Warranty

INTRODUCTION

Antaira Technologies' LMP-0501-XX-V2 series is a 5-port industrial PoE+ managed Ethernet switch embedded with 4*10/100Tx Ethernet ports that support IEEE802.3at/af for a maximum of 30W/port and 1*100Fx fiber connection. The LMP-0501-XX-V2 is a fully manageable Layer 2 Ethernet switch that is pre-loaded with a user-friendly web management console design. It supports the ring network redundancy function using the market's open standard ITU-T G.8032 Ethernet Ring Protection Switch (ERPS) protocol that has a <50ms network recovery time. The advanced network filtering and security functions, such as IGMP, VLAN, QoS, SNMP, RMON, Modbus TCP, and 802.1X/HTTPS/SSH/SSL increase determinism and improve network management for remote SCADA systems or control networks.

The LMP-0501-XX-V2 series is IP30 rated and DIN-rail mountable. There are also two wide operating temperature models for either a standard temperature range (STD: -10°C to 70°C) or an extended temperature range (EOT: -40°C to 75°C). It also provides high EFT and ESD protection for industrial networking applications, such as power/utility, water wastewater, oil/gas/mining, factory automation, security surveillance, ITS and any other outdoor or harsh environment.

DIMENSIONS

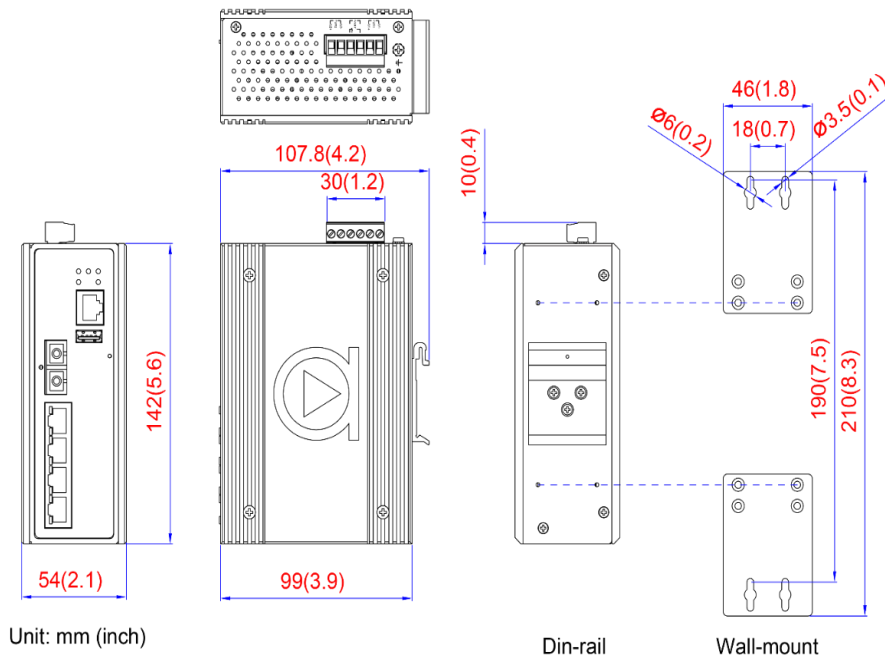

SPECIFICATIONS

Technology		Protection	
L2 Switching	Port/MAC/Protocol/IP Subnet-based VLAN, VLAN trunking, GARP/GVRP, Loop Guard, Link Aggregation static/LACP, BPDU guard, Error disable recovery, IGMPv2/v3 snooping, MLD snooping, IGMP filtering, IPMC throttling / filtering leave proxy, DHCP snooping, ARP, MEP, G.8032 v1/v2, NAT, DHCP per port, SMTP, Quick ERPS, TLS	Network Cable	10Base-T: 2-pair UTP/STP Cat. 3, 4, 5 cable EIA/TIA-568 100-ohm (100m) 100Base-TX: 2-pair UTP/STP Cat. 5 cable EIA/TIA-568 100-ohm (100m)
L3 Switching		Mechanical Characteristics	
DHCP option82, static routes 802.1p Queueing, Input priority mapping, Storm control for Unicast/Multicast/Broadcast, Port/Queue/ACL policer, Port egress shaper, Queue egress shaper, DiffServ (DSCP), Tag remarking, Scheduler mode		Housing	Metal, IP30 protection
QoS		Dimensions	54 x 142 x 99 mm (W x H x D)
		Weight	Unit: 1.9 lbs Shipping: 2.7 lbs
Power Saving	ActiPHY, PerfectReach, IEEE 802.3az EEE power management	Mounting	DIN-Rail, Wall-mount (Optional)
Network Redundancy		Power Requirement	
STP/RSTP/MSTP, port trunk with LACP, ERPS v1/v2 (<50ms)		Input Voltage	48~55VDC Redundant Input
Configuration	Http, Https, Telnet, SSH, CLI, TFTP, SNMP v3	Power Connection	1 removable 6-contact terminal block
System / Diagnostics	Dual Image Protection, PING, PING6	Relay Contact	24VDC, 1A resistive
Switch Properties		Overload Current Protection	Present
Switch Architecture	Back-Plane (Switching Fabric): 1Gbps	Reverse Polarity Protection	Present
Priority Queues	8	PoE Pin Assignment	V+, V+, V-, V-, for pin 1, 2, 3, 6 (Endspan, Mode A)
Processing Type	Store and Forward	PoE Power Budget	120W
Flow Control	IEEE 802.3x flow control, back pressure flow control	System Power Consumption	7.5W
Transfer Rate	14,880pps for Ethernet Port 148,800pps for Fast Ethernet Port	Environmental Limits	
Memory Buffer	4Mbits	Operating Temperature	STD: -10°C to 70°C
Jumbo Frame	9.6Kbytes	Temperature	EOT: -40°C to 75°C
MAC Table Size	8K	Storage Temperature	-40°C to 85°C
VLAN Group	4095	Ambient Relative Humidity	5% to 95%, (non-condensing)
IGMP Group	1024	Regulatory Approvals	
Port Interface		EMI	FCC Part 15 Subpart B Class A, CE EN55022/EN61000-6-4 Class A
Ethernet Port	4*10/100Base-TX, auto negotiation speed, Full/Half duplex mode, and auto MDI/MDI-X connection	EMS	CE EN55024/EN61000-6-2, IEC61000-4-2,3,4,5,6,8
Fiber Port	1*100Base-FX SC/ST type connector	Free Fall / Shock / Vibration	IEC60068-2-32 / IEC60068-2-27 / IEC60068-2-6
RS232 Serial Console	1*RS232 in RJ45	Green	RoHS Compliant
Configuration Backup	1*USB 2.0	Certifications	FCC, CE
LED Indicators	System: Power 1, Power 2, Master, Ring, Fault Ethernet Ports: Speed/Link/Active Fixed Fiber: Link/Active	Warranty	5 Years

ORDERING INFO

LMP-0501-M-V2	5-Port Industrial PoE+ Managed Ethernet Switches w/4*10/100Tx (30W/Port) and 1*100Fx Multi-Mode 2Km, 48~55VDC Power Input; Version 2 Hardware
LMP-0501-M-T-V2	5-Port Industrial PoE+ Managed Ethernet Switches w/4*10/100Tx (30W/Port) and 1*100Fx Multi-Mode 2Km, 48~55VDC Power Input; Version 2 Hardware; EOT: -40°C to 75°C
LMP-0501-S3-V2	5-Port Industrial PoE+ Managed Ethernet Switches w/4*10/100Tx (30W/Port) and 1*100Fx Single-Mode 30Km, 48~55VDC Power Input; Version 2 Hardware
LMP-0501-S3-T-V2	5-Port Industrial PoE+ Managed Ethernet Switches w/4*10/100Tx (30W/Port) and 1*100Fx Single-Mode 30Km, 48~55VDC Power Input; Version 2 Hardware; EOT: -40°C to 75°C
LMP-0501-ST-M-V2	5-Port Industrial PoE+ Managed Ethernet Switches w/4*10/100Tx (30W/Port) and 1*100Fx Multi-Mode 2Km, 48~55VDC Power Input; Version 2 Hardware
LMP-0501-ST-M-T-V2	5-Port Industrial PoE+ Managed Ethernet Switches w/4*10/100Tx (30W/Port) and 1*100Fx Multi-Mode 2Km, 48~55VDC Power Input; Version 2 Hardware; EOT: -40°C to 75°C
LMP-0501-ST-S3-V2	5-Port Industrial PoE+ Managed Ethernet Switches w/4*10/100Tx (30W/Port) and 1*100Fx Single-Mode 30Km, 48~55VDC Power Input; Version 2 Hardware
LMP-0501-ST-S3-T-V2	5-Port Industrial PoE+ Managed Ethernet Switches w/4*10/100Tx (30W/Port) and 1*100Fx Single-Mode 30Km, 48~55VDC Power Input; Version 2 Hardware; EOT: -40°C to 75°C

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660