

LMP-0702G-SFP-24-V2 Series

7-Port Industrial Gigabit PoE+ Light Layer 3 Managed Ethernet Switch, w/4*10/100/1000Tx (30W/Port), 1*10/100/1000Tx, and 2*100/1000 SFP Slots, 12~55VDC Power Input; Version 2 Hardware



Features


- ▶ Supports 4*10/100/1000Tx IEEE 802.3at/af Compliant with 30W/Port, 1*10/100/1000Tx RJ45 Port, and 2*100/1000 SFP Slots
- ▶ Network Redundancy Support: RSTP/MSTP, and G.8032 ERPS v1/v2 (Recovery Time <50ms)
- ▶ Configuration: Web Console, Telnet, CLI Command
- ▶ Supports IGMP v1/v2/v3, up to 1024 Groups
- ▶ Supports QoS (IEEE802.1p) and CoS/ToS
- ▶ Supports IEEE802.1Q VLAN, SNMP v1/v2c/v3
- ▶ Power Input: 12~55VDC in 6-Pin Terminal Block
- ▶ Reverse Polarity Protection
- ▶ IP30 Protection
- ▶ DIN-Rail or Wall Mountable
- ▶ Operating Temperature Range
 - STD: -10° to 65°C, EOT: -40° to 75°C
- ▶ 5-Year Warranty

INTRODUCTION

Antaira Technologies' LMP-0702G-SFP-24-V2 series is a 7-port industrial Gigabit PoE+ managed Ethernet switch embedded with 4*10/100/1000Tx Ethernet ports that support IEEE802.3at/af for a maximum of 30W/port, 1*10/100/1000Tx Gigabit Ethernet port, and 2*100/1000 dual rate SFP slots for fiber connection. The LMP-0702G-SFP-24-V2 series is a fully manageable Light Layer 3 Ethernet switch that is pre-loaded with a user-friendly web management console design. It supports the ring network redundancy function using the market's open standard ITU-T G.8032 Ethernet Ring Protection Switch (ERPS) protocol that has a <50ms network recovery time. The advanced network filtering and security functions, such as IGMP, VLAN, QoS, SNMP, RMON, Modbus TCP, and 802.1X/HTTPS/SSH/SSL increase determinism and improve network management for remote SCADA systems or control networks.

The LMP-0702G-SFP-24-V2 series is IP30 rated and DIN-rail mountable. There are also two wide-operating temperature models for either a standard temperature range (STD: -10°C to 65°C) or an extended temperature range (EOT: -40°C to 75°C). It also provides high EFT and ESD protection for industrial networking applications, such as power/utility, water wastewater, oil/gas/mining, factory automation, security surveillance, ITS and any other outdoor or harsh environment.

DIMENSIONS

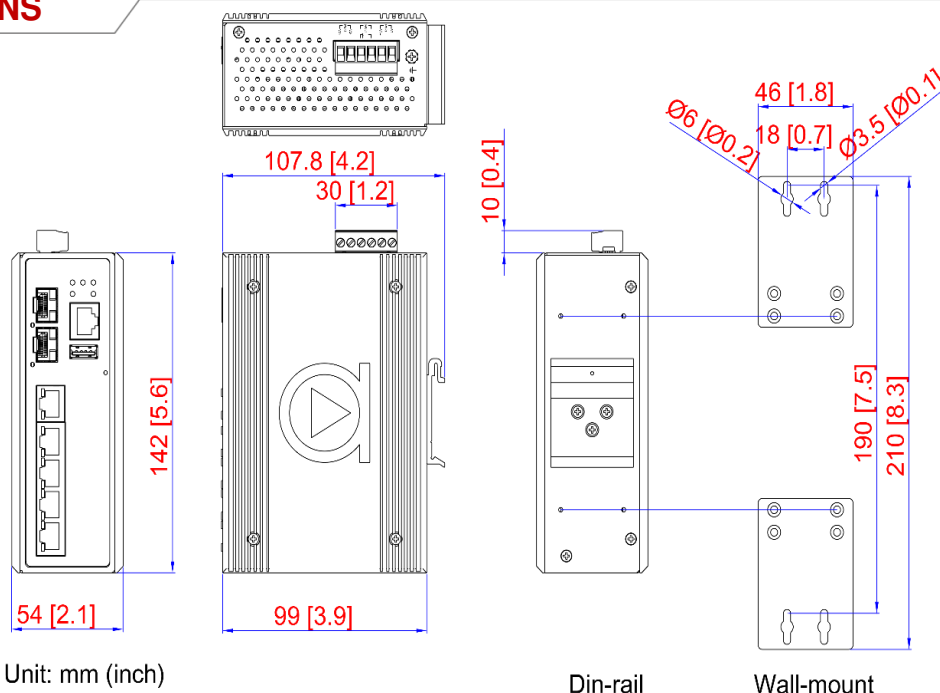

SPECIFICATIONS

Technology		Protection	
L2 Switching	Port/MAC/Protocol/IP Subnet-based VLAN, VLAN trunking, GARP/GVRP, Loop Guard, Link Aggregation static/LACP, BPDU guard, Error disable recovery, IGMP v1/v2/v3 snooping, MLD snooping, IGMP filtering, IPMC throttling / filtering leave proxy, DHCP snooping, ARP, MEP, G.8032 v1/v2, NAT, DHCP per port, SMTP, Quick ERPS, TLS	Network Cable	10Base-T: 2-pair UTP/STP Cat. 3, 4, 5 cable EIA/TIA-568 100-ohm (100m) 100Base-TX: 2-pair UTP/STP Cat. 5 cable EIA/TIA-568 100-ohm (100m) 1000Base-T: 4-pair UTP/STP Cat.5/5E cable; EIA/TIA-568 100-ohm (100m)
	L3 Switching		
QoS	DHCP option82, static routes	Mechanical Characteristics	
	802.1p Queueing, Input priority mapping, Storm control for Unicast/Multicast/Broadcast, Port/Queue/ACL policer, Port egress shaper, Queue egress shaper, DiffServ (DSCP), Tag remarking, Scheduler mode	Housing	Metal, IP30 protection
Power Saving	ActiPHY, PerfectReach, IEEE 802.3az EEE power management	Dimensions	54 x 142 x 99 mm (W x H x D)
Network Redundancy	STP/RSTP/MSTP, port trunk with LACP, ERPS v1/v2 (<50ms)	Weight	Unit: 1.9 lbs Shipping: 2.7 lbs
Configuration	Http, Https, Telnet, SSH, CLI, TFTP, SNMP v3	Mounting	DIN-Rail, Wall Mounting
System / Diagnostics	Dual Image Protection, PING, PING6	Power Requirement	
Switch Properties		Input Voltage	12~55VDC Redundant Input
Back-Plane (Switching Fabric)	14Gbps	Power Connection	1 removable 6-contact terminal block
Priority Queues	8	Relay Contact	24VDC, 1A resistive
Processing Type	Store and Forward	Overload Current Protection	Present
Flow Control	IEEE 802.3x flow control, back pressure flow control	Reverse Polarity Protection	Present
Transfer Rate	14,880pps for Ethernet Port	PoE Pin Assignment	V+, V+, V-, V-, for pin 1, 2, 3, 6 (Endspan, Mode A)
	148,800pps for Fast Ethernet Port	PoE Power Budget	90W@12VDC 120W@24-55VDC
Memory Buffer	4Mbits	System Power Consumption	7.5W
Jumbo Frame	9.6Kbytes	Environmental Limits	
MAC Table Size	8K	Operating Temperature	STD: -10°C to 65°C EOT: -40°C to 75°C
VLAN Group	4095	Storage Temperature	-40°C to 85°C
IGMP Group	1024	Ambient Relative Humidity	5% to 95%, (non-condensing)
Port Interface		Regulatory Approvals	
Ethernet Port	5*10/100/1000Base-TX (30W/Port for Port 1~4 only), auto negotiation speed, Full/Half duplex mode, and auto MDI/MDI-X connection	EMI	FCC Part 15 Subpart B Class A, CE EN55032/EN61000-6-4 Class A
SFP Port	2*100/1000 SFP Slots	EMS	CE EN55035/EN61000-6-2 IEC61000-4-2,3,4,5,6,8
RS232 Serial Console	1*RS232 in RJ45	Free Fall	IEC60068-2-32
LED Indicators	System: Power 1, Power 2, Master, Ring, Fault Ethernet Ports: Speed/Link/Active SFP: Link/Active	Shock	IEC60068-2-27
		Vibration	IEC60068-2-6
		Green	RoHS Compliant
		Certifications	FCC, CE, UL 61010-1, 61010-2-201
		Warranty	5 Years

ORDERING INFO

LMP-0702G-SFP-24-V2	7-Port Industrial Gigabit PoE+ Managed Ethernet Switch, w/4*10/100/1000Tx (30W/Port), 1*10/100/1000Tx, and 2*100/1000 SFP Slots, 12~55VDC Power Input; Version 2 Hardware
LMP-0702G-SFP-24-T-V2	7-Port Industrial Gigabit PoE+ Managed Ethernet Switch, w/4*10/100/1000Tx (30W/Port), 1*10/100/1000Tx, and 2*100/1000 SFP Slots, 12~55VDC Power Input; Version 2 Hardware; EOT: -40°C to 75°C

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660