

NEOUSYS

Rugged Embedded



Intel[®] 9th/ 8th-Gen Core™ i7/ i5/ i3 Rugged Embedded Computer with 7 PCIe/ PCI Expansion Slots



Introduction

Nuvo-8034 is a new-breed of box-PC offering 7 expansion slots in a comparatively compact size. Of its four PCIe slots, two are x16 slots (@Gen3, 8-lanes) connected directly to the CPU PEG port to deliver up to 8 GB/s bandwidth for GPU and high speed I/O cards, and two are x8 slots (@Gen3, 4-lanes) from PCH for general-purpose usage. The system is capable of accmmodating one 180W NVIDIA[®] GPU for modern AI applications. Additionally, there are 3 PCI slots to support legacy PCI cards for general industrial usage.

Nuvo-8034 supports Intel[®] 9th/ 8th-Gen Core^M i processor with workstation-grade Intel[®] C246 chipset to offer superior computing power. Utilizing Neousys' distinctive power design, Nuvo-8034 can handle heavy power consumption of multiple PCIe and PCI expansion cards with 8~48V wide-range DC input. The system features two hot-swappable trays that support 2.5" SATA SSD/ HDD on the front panel with RAID 0/ 1 support, making it easier to access when placed inside a cabinet. External I/O wise, Nuvo-8034 offers 8-channel isolated DI and 8-channel isolated DO for industrial automation, eight USB 3.1 Gen1/ Gen2 ports with screw-lock for USB3 cameras.

With an assortment of I/O ports and flexible 7-slot PCIe/ PCI expandability, Nuvo-8034 is an all-around rugged solution that can satisfy various industrial applications such as machine vision, industrial automation and data analytics.


Specifications


System Core		Storage Interface	
	Supporting Intel [®] Xeon [®] E and 9th/ 8th - Gen CPU	mSATA	2x full-size mSATA port (mux with mini-PCIe)
Processor	(LGA1151 socket) - Intel [®] Xeon [®] Processor E-2176G/ E-2124G/ E-2278GE/ E-2278GE/ - Intel [®] Core [®] 17-9700E/ 17-9700TE/ 17-8700/ 17-8700T - Intel [®] Core [®] 13-9500E/ 15-9500TE/ 15-8500T - Intel [®] Core [®] 13-9100E [*] 13-9100TE/ 13-81001T	Internal Expansion Bus	
		PCI Express	2x PCle x16 slot@Gen3, 8-lanes 2x PCle x8 slots@Gen3, 4-lanes
Chipset	Intel [®] C246 platform controller hub	PCI	3x 33MHz/ 32-bit 5V PCI slots
Graphics	Independent GPU via x16 (@ x8 signals) PEG port, or integrated Intel [®] UHD graphics 630	M.2	1x M.2 2242 B key socket supporting dual SIM mode with selected M.2 LTE module
Memory	Up to 128 GB ECC/ non-ECC DDR4 2133 SDRAM (four SODIMM slots)	mini-PCle	1x full-size mini PCI Express socket with internal SIM socket (mux. with mSATA)
AMT	Supports AMT 12.0	Power Supply	
TPM	Supports TPM 2.0	DC Input	1x 3-pin pluggable terminal block for 8~35VDC DC input
I/O Interface	Supports Trivi 2.0	Remote Ctrl.	1x 3-pin pluggable terminal block for remote control
1/O Internace		Mechanical	
Ethernet	1x Gigabit Ethernet port by Intel [®] I219-LM with screw-lock 1x Gigabit Ethernet port by Intel [®] I210-IT with screw-lock	Dimension	259mm(W) x 280mm(D) x 198mm(H)
Video Port	1x VGA, supporting 1920 x 1200 resolution 1x DVI-D, supporting 1920 x 1200 resolution 1x DisplayPort, supporting 4096 x 2304 resolution	Weight	7kg
		Mounting	Wall-mount
2x software-programmable RS-232/422/485 ports (COM1/ C		Environmental	
Serial Port	2x RS-232 ports (COM3/ COM4)	Operating	
USB 3.1	4x USB 3.1 Gen2 (10 Gbps) ports with screw-lock 4x USB 3.1 Gen1 (5 Gbps) ports with screw-lock	Temperature Storage	
USB 2.0	1x USB 2.0 port (internal use)	Temperature	-40°C ~ 85°C
Isolated DIO	8x isolated DI and 8x isolated DO	Humidity	10%~90% , non-condensing
Audio	1x 3.5 mm jack for mic-in and speaker-out	Vibration	Operating, MIL-STD-810G, Method 514.6, Category 4
Storage Interf	ace	Shock	Operating, MIL-STD-810G, Method 516.6, Procedure I, Table 516.6-II
SATA HDD/ SSD	2x hot-swappable trays for 2.5" HDD/ SSD installation, supporting RAID 0/ 1	EMC	CE/FCC Class A, according to EN 55032 & EN 55024
M.2	1x M.2 2280 M key socket (PCle Gen3 x4) for NVMe SSD or Intel [®] Optane™ memory	thermal throttling ma obtain higher operating	8700 running at 65W mode, the highest operating temperature shall be limited to 50°C and y occur when sustained full-loading applied. Users can configure CPU power in BIOS to g temperature. In the temperature HDD or Solid State Disk (SSD) is required

All rights reserved. Copyright © 2020 Neousys Technology Inc.

www.neousys-tech.com



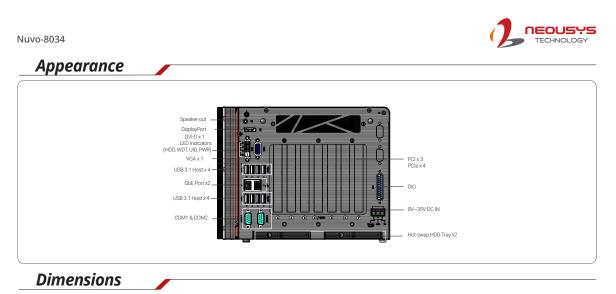

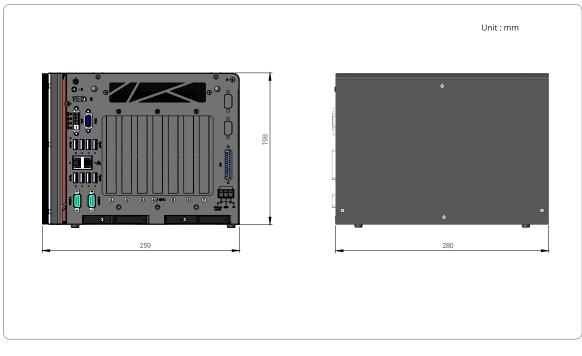

Ordering Information

Model No.	Product Description
Nuvo-8034	Intel [®] 9th/ 8th-Gen Core™ i7/ i5/ i3 embedded computer with 2x PCle x16(@ x8 signals), 2x PCle x8(@ x4 signals) and 3x PCl slots

Optional Accessories

PA-160W-OW	160W AC-DC power Adapter, 20V 8A , 90~264VAC 127~370VDC, Open-Wire Terminal, -30°C~70°C
PA-280W-ET2	280W AC/DC power adapter 24V/11.67A; 16AWG/100cm; cord end terminals for terminal block, operating temperature : -30°C to 60°C
PA-480W-DIN	480W AC-DC power Adapter(SDR-480-24) DIN-rail mount, 24V 20A, 90~264VAC/127~370VDC, Terminal Block, -20°C~70°C
Cbl-IDC210F-DB9M-20CM	10Pin Female to DB9 Male Cable, 20CM

www.neousys-tech.com



Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508 Support: +1 347 719 4508

1309 Coffeen Ave Ste 1200 Sheridan WY 82801 USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050 Support: +44 (0)1785 879 050

Unit A5 Douglas Park Stone Business Park Stone ST15 0YJ United Kingdom

VAT Number: 120 9546 28 Business Registration Number: 07699660