


# SBC-230

3.5" SBC Motherboard

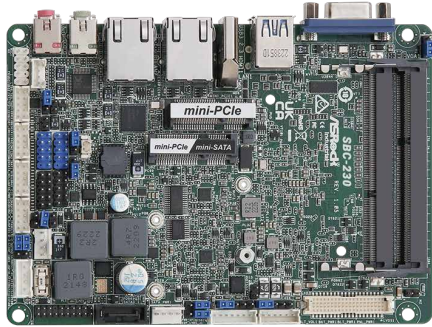

## KEY FEATURES

- Intel® Apollo Lake/Apollo Lake-I SoC Processors
- 2 x 204-pin SO-DIMM up to 16 GB DDR3L 1867 MHz (8GB per DIMM)
- 2 x USB 3.1 Gen1, 4 x USB 2.0, 1 x mini-PCIe, 1 x mSATA/mini-PCIe, 4 x COM, 1 x SATA3
- 2 x Intel 1 Gigabit LAN
- Supports Triple display, 1 x HDMI 1.4b, 1 x VGA, 1 x LVDS or eDP
- TPM Header
- 9~36V DC-In

## SPECIFICATIONS

### Form Factor

Dimensions	3.5" SBC (5.8-in x 4-in x 0.83-in, 14.7 cm x 10.2 cm x 2.1 cm)
------------	--

### Processor System

CPU	Intel® Apollo Lake/Apollo Lake-I SoC Processors - SBC-230D (N4200, QC, 1.10 GHz, 6W) - SBC-230L (N3350, DC, 1.10 GHz, 6W) - SBC-230J (J3455, QC, 1.50 GHz, 10W)
Chipset	SoC
BIOS	AMI SPI 128 Mbit

### Memory

Technology	Dual Channel DDR3L 1867 MHz
Capacity	16 GB (8 GB per DIMM)
Socket	2 x 204-pin SO-DIMM

### Graphics

Controller	Intel® Gen9 Graphics DX 12
HDMI	HDMI 1.4b Max resolution up to 4096x2160@24Hz
VGA	Max resolution up to 1920x1200@60Hz
LVDS	Dual channel 24 bit up to 1920x1200@60Hz
eDP	Max resolution up to 4096x2160@60Hz
MultiDisplay	Triple Display

### Expansion Slot

mini-PCIe	1 x Full size with PCIe x1 and USB 2.0
mSATA/mini-PCIe	1 x Full size with USB 2.0

### Audio

Interface	Realtek ALC897, High Definition Audio. Line-out, Mic-in
-----------	---

### Ethernet

Controller/ Speed	LAN1: Intel® I210 with 10/100/1000 Mbps LAN2: Intel® I210 with 10/100/1000 Mbps
Connector	2 x RJ-45

### Rear I/O

HDMI	1 x HDMI 1.4b
VGA	1
Ethernet	2 x 1 Gigabit LAN
USB	2 x USB 3.2 Gen1
Audio	2 (Mic-in, Line-out)

### Internal Connector

USB	4 x USB 2.0 (2x 2.54 pitch header)
COM	COM1 (RS-232/422/485) COM2, COM3, COM4 (RS-232)
GPIO	4 x GPI + 4 x GPO
TPM	TPM Header
LVDS	1 (shared with eDP, by jumper setting)
eDP	1 (shared with LVDS, by jumper setting)
SATA PWR Output	1
Speaker Header	1

### Storage

mSATA	1 x Half size with USB 2.0 colay with mini-PCIe
SATA	1 x SATA3 (6Gb/s)

### Watchdog Timer

Output	From Super I/O to drag RESETCON#
Interval	256 Segments, 0, 1, 2, ...255sec

### Power Requirements

Input PWR	9~36V (DC In)
Power On	AT/ATX Supported - AT : Directly PWR on as power input ready - ATX : Press button to PWR on after power input ready

### Environment

Operating Temp	0°C ~ 60°C
Storage Temp	-40° C ~ 85° C
Operating Humidity	5% ~ 90%
Storage Humidity	5% ~ 90%

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660