

NVIDIA® Jetson Rugged Computer



# NRU-160-AWP Series

IP66 Waterproof Jetson Orin™ NX/ Nano AI Computer with 6x GMSL2 or 4x PoE+ GbE Ports



CE FC

## Key Features

- Powered by NVIDIA® Orin™ NX or Orin™ Nano SoM bundled with JetPack
- IP66 waterproof and dustproof
- -25°C to 70°C fanless operation (No throttling at 70°C with 20W TDP Mode)
- 6x GMSL2 automotive cameras via FAKRA Z connectors (NRU-161V-AWP)
- 4x PoE+ GbE via M12 X-coded connectors (NRU-162S-AWP)
- 1x CAN FD and 1x RS232 via M12 A-coded connectors
- 225 x 136 x 55 mm low-profile design
- 8V to 35V wide-range DC input with built-in ignition power control

## Introduction

The NRU-160-AWP series is a rugged, IP66 waterproof edge AI computer driven by an NVIDIA® Jetson Orin™ NX or Orin™ Nano. Its target applications include smart city roadside installations, AI inspection in food factories, perception units for outdoor robots, and ADAS for off-highway vehicles. Furthermore, it aims to redefine rugged, wide-temperature edge AI with its waterproof features at an affordable cost, achieved through a streamlined mechanical design, carefully selected waterproof connectors and standardized cable kit.

Powered by NVIDIA® Jetson Orin™ NX, the NRU-160-AWP delivers superior AI inference with up to 100 sparse TOPS (INT8) and can transcode up to eighteen 1080P video streams simultaneously. Designed to accommodate various camera requirements for vision-based AI applications, the NRU-160-AWP comes in two models: the NRU-161V-AWP, which supports up to 6x GMSL2 automotive cameras with pre-built drivers for selected cameras with IMX390, ISX031, and IMX490 CMOS sensors; and the NRU-162S-AWP, which offers 4x PoE+ GbE ports for IP or industrial GigE cameras. Additionally, a waterproof GbE port is provided for data transmission with other computers or LiDAR.

The NRU-160-AWP is designed for edge deployment, whether in-cabinet, in-vehicle, or in-robot. Its compact 225 x 136 x 55 mm profile makes it ideal for confined spaces. It is equipped with an 8V to 35V wide DC input range, ignition power control, 1x CAN FD bus port, and 1x RS232 port. It also features one mini-PCIe socket for CAN/ COM/ WiFi modules and one M.2 B-key socket for 4G LTE/ 5G NR mobile communication modules.

The integration of IP66 waterproof capability, Orin NX AI performance, and rich onboard camera connectivity strikes a balance between ruggedness, performance, and cost. It is a ready-to-deploy waterproof edge AI platform for smart agriculture, mining, construction, roadside applications, edge inspection, and outdoor AMRs.


## Specifications

System Core		Internal I/O Interface	
<b>Processor</b>	NVIDIA® Jetson Orin™ NX system-on-module (SOM), comprising NVIDIA® Ampere GPU and ARM Cortex CPU	<b>Mini PCI Express</b>	1x full-size mini PCI Express socket (PCIe + USB 2.0)
<b>Memory</b>	16GB/ 8GB LPDDR5 @ 3200 MHz on SOM	<b>M.2</b>	1x M.2 3042/3052 B key (USB 3.2 Gen 1 + USB 2.0) for LTE/5G module with dual micro SIM support
<b>eMMC</b>	N/A	<b>Storage</b>	
<b>Panel I/O Interface</b>		<b>M.2 NVMe</b>	1x M.2 2242 M key socket (PCIe Gen 3x1) for NVMe SSD
<b>GMSL2</b>	<b>NRU-161V-AWP</b>	<b>Power Supply</b>	
	6x waterproof GMSL2 FAKRA Z connectors, supporting multiple configurations: Configuration A. 6x AC-IMX390 (2MP@30FPS) Configuration B. 6x AC-ISX031 (3MP@30FPS) Configuration C. 4x AC-IMX490 (5MP@30FPS)	<b>DC Input</b>	
<b>Ethernet Port</b>	<b>NRU-161V-AWP</b>	8V to 35V DC input and ignition power control via M12 A-coded, 5-pin connector (IGN/ GND/ V+) <sup>[1]</sup>	
	<b>NRU-162S-AWP</b>	<b>Mechanical</b>	
<b>PoE+</b>	<b>NRU-162S-AWP</b>	<b>Dimension</b>	
	IEEE 802.3at PoE+ PSE for Port 1 to Port 4 with 50W total power budget	225 mm (W) x 136 mm (D) x 55 mm (H) (excluding wall-mount)	
<b>USB</b>		<b>Weight</b>	
	2x USB 2.0 ports via M12 A-coded 8-pin connector 1x USB Type C port (for system flashing and OTG, under service door)	3.0 kg (excluding wall-mount)	
<b>Video Port</b>		<b>Mounting</b>	
	1x VGA, supporting 1920x1080 at 60Hz via M12 A-coded 17-pin connector	VESA 75 mount (standard) Wall-mount (standard)	
<b>Serial Port</b>		<b>Environmental</b>	
	1x RS-232 port via M12 A-coded 8-pin connector	-25°C to 70°C with passive cooling (20W TDP mode) <sup>[2]</sup>	
<b>CAN bus</b>		<b>Operating Temperature</b>	
	1x CAN FD port via M12 A-coded 8-pin connector	With full CPU+GPU stressing: 1. NRU-160-AWP non-throttling at 70°C with 20W TDP mode 2. NRU-160-AWP non-throttling at 60°C with 25W TDP mode (Orin NX MAXN)	
<b>Isolated DIO</b>		<b>Storage Temperature</b>	
	1x isolated GPS PPS input via M12 A-coded 8-pin connector	-40°C to 85°C	
		<b>Humidity</b>	
		10% to 90%, non-condensing	
		<b>Vibration</b>	
		MIL-STD-810H, Method 514.8, Category 4	
		<b>Shock</b>	
		MIL-STD-810H, Method 516.8, Procedure I	
		<b>EMC</b>	
		CE/ FCC Class A, according to EN 55032 & EN 55035 EN 50121-3 (EN 50155:2017, Clause 13.4.8) (NRU-162S-AWP only)	


<sup>[1]</sup>The required DC input range is 8V to 35V when the system load is under 60W. The required DC input range is 12V to 35V when the system load is between 60W to 96W. The required DC input range is 20V to 35V when the system load is between 96W to 160W.  
<sup>[2]</sup>For sub-zero and over 60°C operating temperature, a wide temperature HDD or Solid State Disk (SSD) is required.

NRU-160-AWP Series

**Appearance**

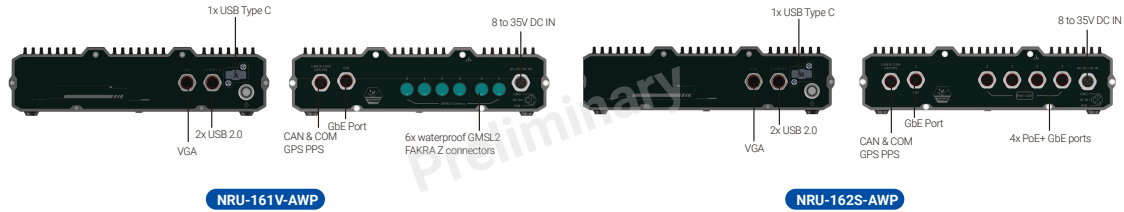

**Dimensions**

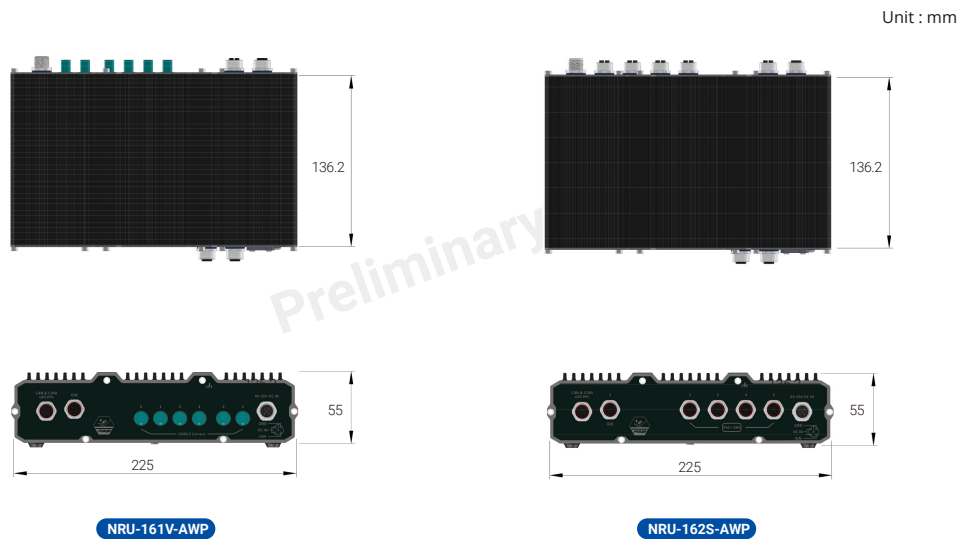

**Ordering Information**

Model No.	Product Description
<b>NRU-161V-AWP</b>	IP66 Waterproof Jetson Orin™ NX/ Nano Edge AI Computer with 6x GMSL2 Ports
<b>NRU-162S-AWP</b>	IP66 Waterproof Jetson Orin™ NX/ Nano Edge AI Computer with 4x PoE+ GbE Ports
<b>Jetson Module Option</b>	Options for Different Jetson Orin™ NX and Jetson Orin™ Nano SKUs
<b>NVMe Option</b>	Options for Different Capacities of M.2 2242 NVMe Storage

**Optional Accessories**

<b>PA-60W-OW</b>	60W AC/ DC power adapter 12V/ 5A; cord end terminals for terminal block, operating temperature: -30 to 60°C
<b>PA-160W-OW</b>	160W AC/ DC power adapter 20V/ 8A; 18AWG/ 120cm; cord end terminals for terminal block, operating temperature: -30 to 70°C
<b>AC-ISX031-H60</b>	Sony ISX031 CMOS sensor w/ built-in ISP; 1920x1536 @30fps, HFOV H63.9°; IP67+IP69K; -40°C to 85°C operating temperature; male FAKRA connector; active alignment; without lens cap
<b>AC-ISX031-H120</b>	Sony ISX031 CMOS sensor w/ built-in ISP; 1920x1536 @30fps, HFOV H120.6°; IP67+IP69K; -40°C to 85°C operating temperature; male FAKRA connector; active alignment; without lens cap
<b>AC-ISX031-H190</b>	Sony ISX031 CMOS sensor w/ built-in ISP; 1920x1536 @30fps, HFOV H195.9°; IP67+IP69K; -40°C to 85°C operating temperature; male FAKRA connector; active alignment; without lens cap
<b>AC-IMX390-H60</b>	Sony IMX390 CMOS sensor camera; 1920x1080 @ 30fps; LFM; HFOV 63.9°; IP67+IP69K; -40°C to 85°C operating temperature; male FAKRA connector; active alignment; without lens cap
<b>AC-IMX390-H120</b>	Sony IMX390 CMOS sensor camera; 1920x1080 @ 30fps; LFM; HFOV 120.6°; IP67+IP69K; -40°C to 85°C operating temperature; male FAKRA connector; active alignment; without lens cap
<b>AC-IMX390-H190</b>	Sony IMX390 CMOS sensor camera; 1920x1080 @ 30fps; LFM; HFOV 186°; IP67+IP69K; -40°C to 85°C operating temperature; male FAKRA connector; active alignment; without lens cap
<b>AC-IMX490-H30</b>	Sony IMX490 CMOS sensor camera; 2880x1860 @30fps; LFM; HFOV 30.0°; IP67+IP69K; -40°C to 85°C operating temperature; male FAKRA connector; active alignment; without lens cap
<b>AC-IMX490-H60</b>	Sony IMX490 CMOS sensor camera; 2880x1860 @30fps; LFM; HFOV 62.5°; IP67+IP69K; -40°C to 85°C operating temperature; male FAKRA connector; active alignment; without lens cap
<b>AC-IMX490-H120</b>	Sony IMX490 CMOS sensor camera; 2880x1860 @30fps; LFM; HFOV 120°; IP67+IP69K; -40°C to 85°C operating temperature; male FAKRA connector; active alignment; without lens cap

All specifications and photos are subject to change without prior notice

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660