


AX92321 NEW

4-port/8-port USB 3.0 PCI Express Card with 4 Independent Host Controllers

Features

- Four or eight USB 3.0 ports
- Four independent USB 3.0 host controllers
- 900 mA/1500 mA max. per port configurable via jumper settings
- Compliant with USB 3.0 Rev.1.0 and Intel® xHCI Rev.1.0
- PCI Express x4 interface
- Operating temperature from 0°C to 70°C
- Supports Windows® 7/10
- Supports each port's power on/off via software settings

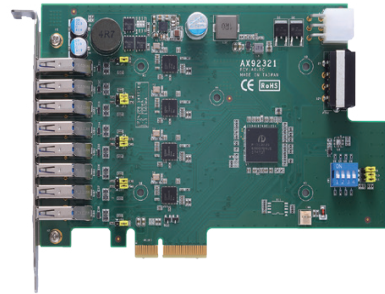

Introduction


The AX92321 has two versions – 4-port or 8-port – for users to choose from for various applications. The 4-port AX92321 has four independent Renesas μ PD720202 USB 3.0 host controllers to offer up to 5 Gbps bandwidth per port, even when four ports are used simultaneously. The AX92321 can be configured to support maximum 900mA or 1500mA current output to supply stable power for various external USB devices. The AX92321 also support power on/off control for each port via software settings. This USB 3.0 PCI Express card is able to operate under a wide operating temperature range of 0°C to 70°C, allowing it to be used in harsh environments for vision and factory automation applications.

Specifications

| USB | |
|--------------------|---|
| Channels | 4 x USB 3.0 type A connector (AX92321-4U) 8 x USB 3.0 type A connector (AX92321-8U) |
| Controller | 4 x Renesas μ PD720202 host controllers Compliant with USB 3.0 specification and Intel® xHCI specification, revision 1.0 |
| Max. Current | 900/1500 mA maximum per port configurable via jumper settings |
| Data Transfer Rate | Super speed (5.0 Gbps)/high speed (480.0 Mbps)/full speed (12.0 Mbps)/low speed (1.5 Mbps) |

General

| | |
|-----------------------|--|
| Bus Type | PCI Express x4 Gen2 |
| Power Requirements | Power from PCIe slot (total power max. 20W USB power output) 2.1A @ +12V 0.8A @ +3.3V Power from ATX power connector 5A @ +12V or 2.5A @ +24V 0.8A @ +3.3V (from PCIe slot) Power from 4P Molex power connector 5A @ +12V 0.8A @ +3.3V (from PCIe slot) |
| Dimensions | 168 mm (6.6") x 107 mm (4.2") |
| Power Connector | 4-pin Molex connector 6-pin ATX power connector |
| Operating Temperature | 0°C to +70°C (+32°F to +158°F) |
| Storage Temperature | -20°C to +80°C (-4°F to +176°F) |
| Operating Humidity | 10 - 95% RH, non-condensing |
| Certifications | CE compliance |
| OS | Windows® 7/10 (32/64-bit) |
| Software | Each port's power on/off is controlled by software |

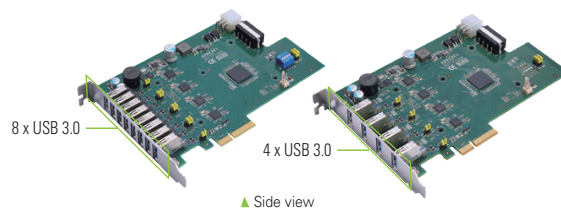

Ordering Information

| | |
|---|---|
| AX92321-4U (P/N: E392321101) | 4-port USB 3.0 PCI Express card with 4 independent USB 3.0 host controllers |
| AX92321-8U (P/N: E392321100) | 8-port USB 3.0 PCI Express card with 4 independent USB 3.0 host controllers |
| For IPC962/964 Riser Card Power Connector (P/N: 59492320700E) | Power cable 4P3.0/6P4.2, L=100 mm |

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660