

LNx-1204G-SFP Series

12-Port Industrial Gigabit Unmanaged Ethernet Switch, with 8*10/100/1000Tx and 4*100/1000 SFP Slots



Features


- ▶ Supports 8*10/100/1000Tx and 4*100/1000 SFP Slots
- ▶ Supports Auto MDI/MDI-X Function
- ▶ Store-and-Forward Switching Architecture
- ▶ 24Gbps Back-Plane (Switching Fabric)
- ▶ 8K MAC Address Table
- ▶ 9.6Kbytes Jumbo Frame Support
- ▶ Surge Protection: 2,000 VDC Support
- ▶ ESD Protection: 6,000 VDC Support
- ▶ Redundant Power Input Design: 12~48VDC
- ▶ Built-in 1 Relay Output for Power Failure Warning
- ▶ IP30 Rugged Metal Case Design
- ▶ DIN-Rail and Wall Mount Support
- ▶ Operating Temperature Range - STD: -10° to 70° C, EOT: -40° to 75° C
- ▶ 5-Year Warranty

INTRODUCTION

Antaira Technologies' LNx-1204G-SFP series industrial gigabit unmanaged Ethernet switch series is IP30 rated and DIN-Rail mountable. Each unit is designed with eight gigabit Ethernet ports and four dual rate (100/1000) SFP slots for fiber connections, making it ideal for applications that demand high bandwidth and long distance communication. This product series provides high EFT and ESD protection to prevent any unregulated voltage. Plus, it provides two wide operating temperature models to support either a -10 to 70°C or -40 to 75°C environment.

The LNx-1204G-SFP product series is ideal for supporting applications that require high density port connections, such as, power/utility, water wastewater treatment plants, oil/gas/mining, process control automation, security access control systems, and intelligent transportation systems.

DIMENSIONS

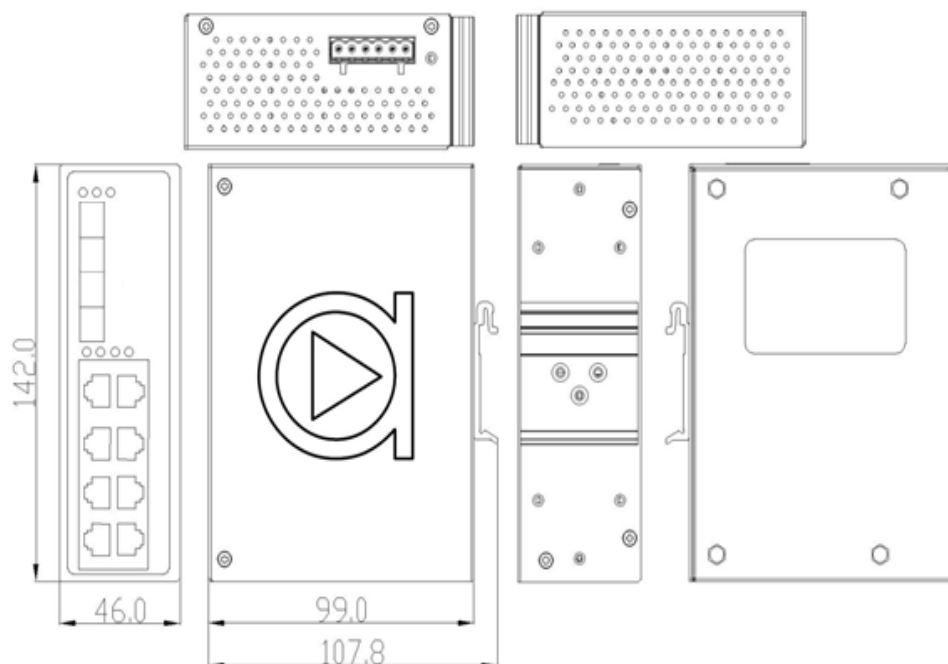

SPECIFICATIONS

Technology		Mechanical Characteristics	
Standards	IEEE 802.3 10BaseTx Ethernet	Housing	Metal, IP30 protection
	IEEE 802.3u 100BaseTx Fast Ethernet	Dimensions	46 x 99 x 142 mm (W*D*H)
	IEEE 802.3ab 1000BaseTx	Weight	Unit 1.7lbs.
	IEEE 802.3z Gigabit Fiber	Shipping Weight	2.2 lbs.
Processing Type	Store and Forward	Mounting	DIN-Rail and Wall-mount (optional)
Protocol	CSMA/CD	Environmental Limits	
Flow Control	IEEE 802.3x back pressure flow control	Operating Temperature	STD: -10° to 70°C
Switch Properties		EOT: -40° to 75°C	
Switch Architecture	Back-Plane (Switching Fabric): 24Gbps	Storage Temperature	-40° ~ 85°C
Transfer Rate	14,880pps for Ethernet Port	Ambient Relative Humidity	5 to 95%, (non-condensing)
	148,800pps for Fast Ethernet Port	Regulatory Approvals	
	1,488,000pps for Gigabit Ethernet Port	EMI	FCC Class A
Protection	EFT: 2,000VDC; ESD: 6,000VDC	EMS	EN61000-4-2,3,4,5,6,8, EN61000-6-2,4
Memory Buffer	7,926pps (default)	Free Fall	IEC60068-2-32
Jumbo Frame	9.6Kbytes	Shock	IEC60068-2-27
MAC Table Size	8K	Vibration	IEC60068-2-6
Interface		Green	RoHS Compliant
Ethernet Port	8*RJ45 Ports w/10/100/1000Tx	Certifications	FCC, CE, UL 61010-1, UL 61010-2-201
Fiber Port	4*100/1000 SFP Slot	Warranty	5 Years
Network Cable	10Base Tx: 2-pair UTP/STP Cat. 3,4,5		
	100Base Tx: 2-pair UTP/STP Cat. 5		
	1000Base Tx: 2-pair UTP/STP Cat. 5/5E		
Power Requirements			
Input Voltage	12~48VDC, Redundant Input		
Overload Current Protection	Present		
Connection	1 removable 6-contact terminal block		
Reverse Polarity Protection	Yes		
Power Consumption	15 Watts		

ORDERING INFO

LNx-1204G-SFP	12-Port Industrial Gigabit Unmanaged Ethernet Switch, w/ 8*10/100/1000Tx, and 4*100/1000 SFP Slot
LNx-1204G-SFP-T	12-Port Industrial Gigabit Unmanaged Ethernet Switch, w/ 8*10/100/1000Tx, and 4*100/1000 SFP Slot; EOT: -40 to 75C
Optional Accessories	
DR-15-24	15W Industrial Din Rail Power Supply, 24VDC
DR-45-24	45W Industrial Din Rail Power Supply, 24VDC
MDR-60-48	60W Industrial Din Rail Power Supply, 48VDC
DR-75-48	75W Industrial Din Rail Power Supply, 48VDC

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660