


# AIR6N0-C-MB NX 2×GIGE

YUAN  
Visualize Intelligent Planet

## Card Size AI Edge with Multi AIoT Expansion

### Features

- Powered by NVIDIA Jetson Orin™ NX up to 100 / 70 TOPS
- Business Card Size
- 2×GIGE In, PSE Support
- 2×M.2, Gen 4×2 M Key / Gen 4×1 E Key
- 1×USB3.2 Gen2
- 1×Mini DisplayPort




### Specifications

System		
CPU	NVIDIA Jetson Orin™ NX 8GB 6-Core Arm® Cortex®-A78AE v8.2 64-Bit CPU 1.5MB L2 + 4MB L3	NVIDIA Jetson Orin™ NX 16GB 8-Core Arm® Cortex®-A78AE v8.2 64-Bit CPU 2MB L2 + 4MB L3
GPU	1024-Core NVIDIA Ampere Architecture GPU with 32 Tensor Cores	
AI Performance	NVIDIA Jetson Orin™ NX 8GB 70 TOPS	NVIDIA Jetson Orin™ NX 16GB 100 TOPS
System Memory	NVIDIA Jetson Orin™ NX 8GB 8GB LPDDR5	NVIDIA Jetson Orin™ NX 16GB 16GB LPDDR5
Interface		
Storage	Supports External NVMe 1×Micro SD Card Slot	
Display Interface	1×Mini DP1.4	
Ethernet	1×RJ45 for 10/100/1000Mbps Ethernet DHCP Client	
Expansion Slot	1×M.2 2230 M Key PCIe Gen4×2 Slot 1×M.2 2230 E Key PCIe Gen4×1 Slot	
USB	1×USB3.2 Gen2 ( Type-C )	
MIPI	2×4MIPI CSI-2 Lanes ( D-PHY 2.1, Support MIPI Camera, Capture Card )	
Peripheral Communication	10 Pin Header 1×USB2.0 4×GPIO 1×I2C	
	6 Pin Wafer 1×UART(*)	
	2 Pin Header 1×GPIO	
	3 Pin Header 1×UART (*)	
Misc. Features	* Please select either 6 Pin Wafer UART or 3 Pin Header UART to use Firmware Upgradable	

### Key points

Video Interface	
Video Input	2×GIGE ( PSE Support with Power Board )


## SDK/Software

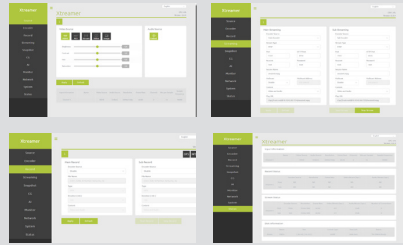Video Feature		
Video Encode	AV1 ( UHP ) 1×4K60   3×4K30   6×1080p60   12×1080p30	
	H.265 ( UHP ) 1×4K60   3×4K30   6×1080p60   12×1080p30	
Video Decode	H.264 ( UHP ) 1×4K60   2×4K30   5×1080p60   11×1080p30	
	AV1 ( Main Profile ) 1×8K30   2×4K60   4×4K30   9×1080p60   20×1080p30	
	H.265 ( Main, Main10 ) 1×8K30   2×4K60   4×4K30   9×1080p60   18×1080p30	
	H.264 ( Baseline, Main, High ) 1×4K60   2×4K30   5×1080p60   11×1080p30	
	VP9 ( Profile 0, Profile 2 ) 1×4K60   3×4K30   7×1080p60   15×1080p30	
SDK		
QCAP	Capture High Performance Renderer Image Snapshot Deinterlace, Alpha Blending Engine Auto Signal Detection 2D/3D Video, Audio and VANC Streams Capture	
	Record Encrypt / Sync / Clone / Recording Time-Shifting / Rewind / Pre-Event / Recording Multi-Streams ( 3D ) Recording Animation Transition Effect Video Cropping, Scaling and Alpha Blending Engine	
QDEEP	Stream 2D/3D Universal Stream Client 2D/3D Multi-Streams Stream Server RTSP, RTMP, HLS, SRT, TS, WebRTC. NDI-HX (*), Full NDI (*), Dante AV-H (*) Animation Transition Effect Video Cropping, Scaling and Alpha Blending Engine *Separate License Required	
	AI SDK Integrated Multiple Algorithms and Deep-Learning Models in Various Fields of Applications Face Recognition Objects Detection Objects Segment Optical Character Recognition License Plate Recognition Customizable Video AI Functions Upon Request	
Software (Optional)		
Xtreamer	Web Based User Interface	
	Encode / Decode AV1, H.26X  Color Format Adjust 444 / 422 / 420, 10Bit / 8Bit Select  Record MP4, TS  Stream / Network RTSP, RTMP, HLS, SRT, TS, WebRTC. NDI-HX (*), Full NDI (*), Dante AV-H (*) *Separate License Required	
SCP	Capture Auto Signal Detection Deinterlace, OSD, Color Adjustment Image Snapshot Animation Transform Effect for PGM	
	Record AV1, H.26X MP4, TS Multi-Stream Recording Schedule Recording  Stream Multi-Streams Stream Server RTSP, RTMP, HLS, SRT, TS, WebRTC, Full NDI (*), NDI-HX (*), Dante AV-H (*) *: Separate License Required	

## Environment

Development Environment	
OS	Ubuntu: 20.04
Kernel	5.10.104-tegra or Higher
BSP	Linux for Tegra(L4T) R35.3.1 or Higher
SDK	JetPack 5.1.1 or Higher
Environment	
Power Supply	DC input : 48V
Power Consumption	TBA
Operating Temperature	Standard Version: 0~60 °C with Airflow
Storage Temperature	-20~80 °C


## Mechanical

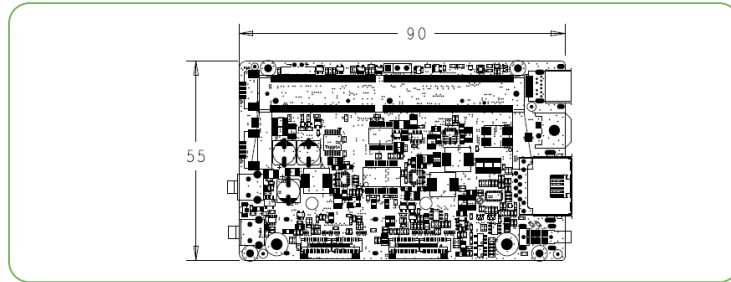

- Dimension of main Board: 90mm×55mm
- Weight: 220g (Including SOM, Fan and Daughter Board)


## IO Layout

- Carrier Board

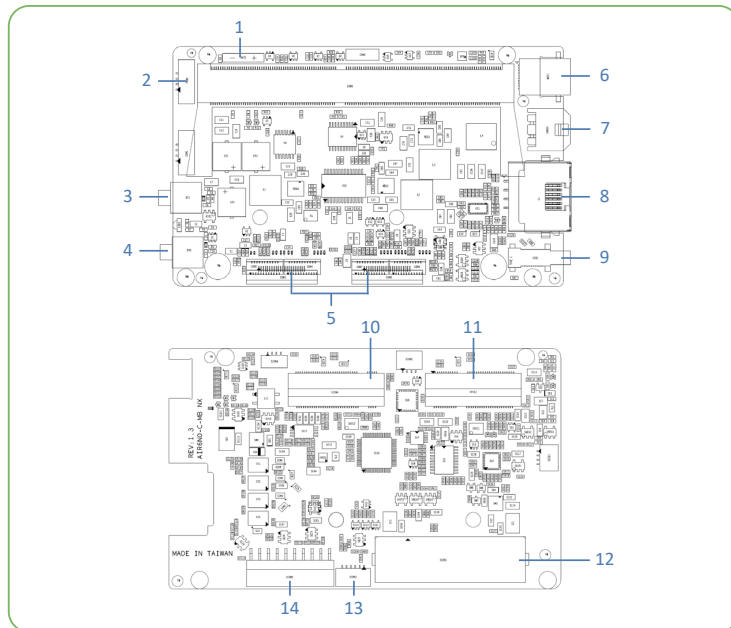


1. Battery
2. FAN
3. Recovery
4. Power
5. MIPI
6. Mini DisplayPort1.4
7. DC Pin Header (19V)
8. RJ45
9. USB3.2 Gen 2 Type-C
10. M.2 2230 M Key (PCIe Gen4×2)
11. M.2 2230 E Key (PCIe Gen4×1)
12. 80 Pin Header (Connect with Daughter Board)
13. 6 Pin Wafer
14. 10 Pin Header

• Daughter Board

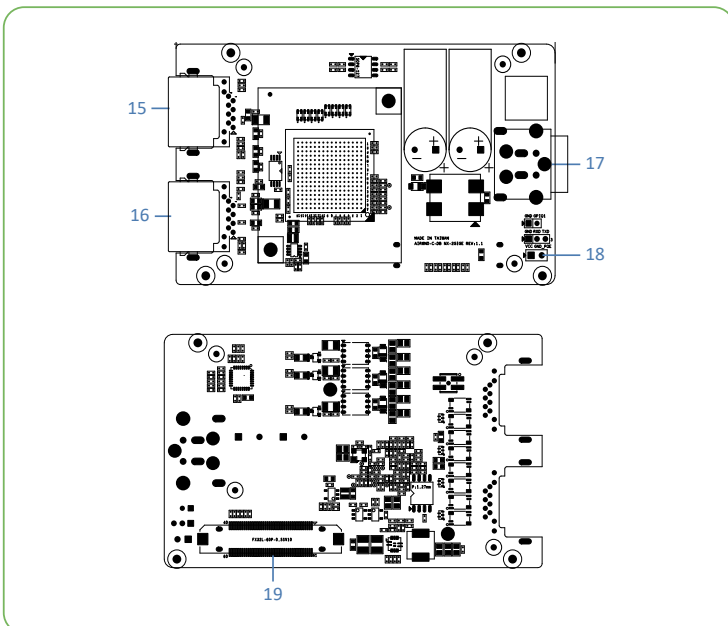

- 15. GIGE CH1 In
- 16. GIGE CH2 In
- 17. 4 Pin DC Jack
- 18. 2 Pin Header (Power)
- 19. 80 Pin Header (Connect with Carrier Board)

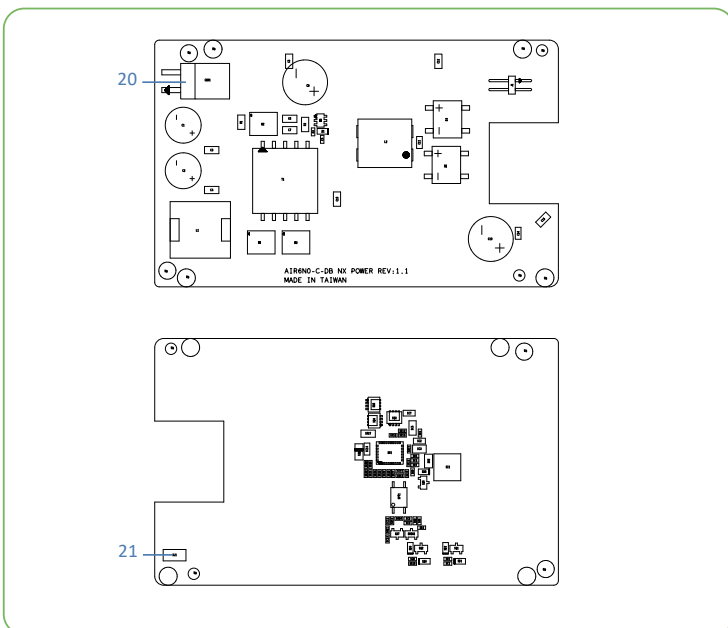

- 20. 2 Pin Wafer (Power Out to Carrier Board)
- 21. 2 Pin Header (Power In)



\* All registered trademarks are the property of their owners. The photo is for reference only.

\* Technology License Patent Royalty. Supplier (YUAN Technology Ltd.) as an OEM vendor is not responsible for any royalties applied to the Models and collected by any patent or trade mark holders or his exclusive, non-exclusive.

Licensees or representatives such as MPEGLA, Dolby, Thomson, Sisvel, H.264, MPEG4 and any other natural or legal person. All concerning royalties of patents and trade marks will be paid or negotiated with the above mentioned owner by you. In case of any patent or trademark infringement you are responsible for all necessary processes and costs. You accept and acknowledge that all prices of Models offered by supplier are exclusive of any royalties, charges or license fees for any patents in any countries or areas.

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660