

# W12L100-GCB1

## 12.3" G-WIN GC Series Front IP65 PCAP Display



### KEY FEATURES


- 12.3" 1920 x 720 Resolution Front IP65 PCAP Display
- VGA input and HDMI input
- Projected Capacitive Multi-Touch
- Front IP65 for protection against water and dust



### SPECIFICATIONS

| Display             |                                                                                                                        |                       |                                                      |
|---------------------|------------------------------------------------------------------------------------------------------------------------|-----------------------|------------------------------------------------------|
| Resolution          | 1920x720                                                                                                               | Size                  | 12.3 inches                                          |
| Contrast Ratio      | 1000:1                                                                                                                 | Panel Brightness      | 1000.0 nits                                          |
| Display Color       | 16.7M Colors                                                                                                           | View Angles           | 88,88,88,88                                          |
| Type                | Projected Capacitive Multi Touch                                                                                       |                       |                                                      |
| Environment         |                                                                                                                        |                       |                                                      |
| Operating Humidity  | 10% to 90% (Non-Condensing)                                                                                            | Operating Temperature | 0~50°C                                               |
| Storage Temperature | -20°C~60°C                                                                                                             | Shock                 | MIL-STD-810G Method 516.6                            |
| Vibration           | MIL-STD-810G Method 514.6                                                                                              | IP rating             | Front IP65                                           |
| Certification       |                                                                                                                        |                       |                                                      |
| Certification       | CE, FCC                                                                                                                |                       |                                                      |
| IO Ports            |                                                                                                                        |                       |                                                      |
| USB Port            | 1 x USB for Touch Screen                                                                                               | Video                 | 1 x VGA<br>1 x HDMI (Optional)<br>1 x DVI (Optional) |
| Mechanical          |                                                                                                                        |                       |                                                      |
| Dimension           | 325.02 x 146.5 x 44.9 mm                                                                                               | Mounting              | VESA Mount/ Panel Mount                              |
| Enclosure           | Plastic Bezel & Metal back cover                                                                                       | Cooling System        | Fanless Design                                       |
| Accessory           |                                                                                                                        |                       |                                                      |
| Accessory           | 1 x VGA cable<br>1 x HDMI cable<br>100~240V AC to DC Adapter<br>Power Cord<br>Manual<br>VESA screws(Varies by product) | Optional Accessory    | Remote Controller (Optional,Varies by product)       |
| Power               |                                                                                                                        |                       |                                                      |
| Power Rating        | 12V DC in<br>24V DC in (optional)                                                                                      |                       |                                                      |
| Control             |                                                                                                                        |                       |                                                      |
| Button              | 5 Keys: - , + , Power , Esc , Enter                                                                                    |                       |                                                      |

**DIMENSIONS** UNIT:MM

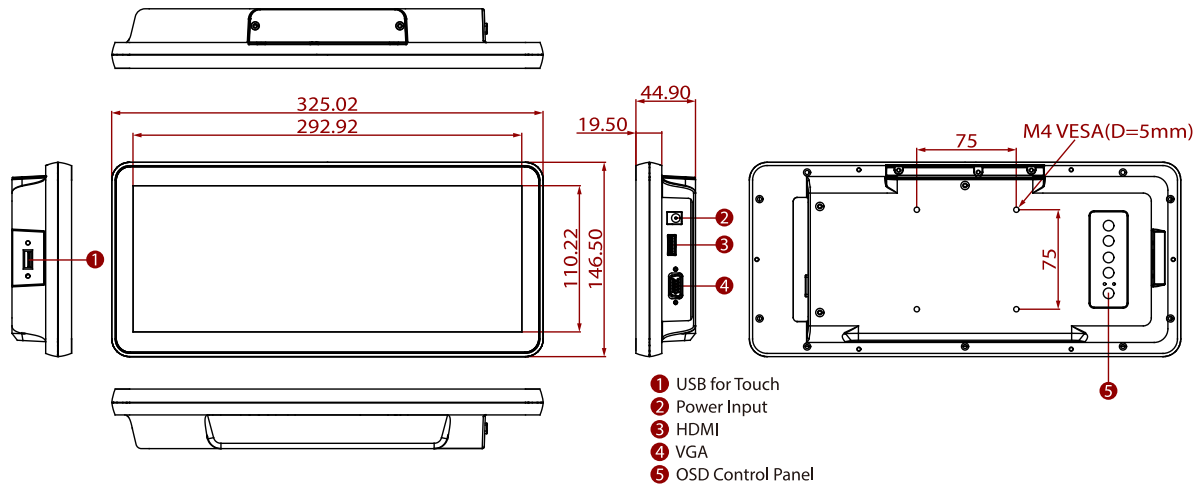

**NOTE**

- 1.This is a simplified drawing and some components are not marked in detail.
- 2.Please contact our sales representative if you need further product information.
- 3.All specifications are subject to change without prior notice.
- 4.The product shown in this datasheet is a standard model.For diagrams that contain customized or optional I/ O, please contact the Winmate Sales Team for more information.

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660