

# W24IB3S-SPA269

## 23.8" Intel® Celeron® N2930 IP69K Stainless PCAP Chassis Panel PC



### KEY FEATURES

- 23.8", 1920 x 1080 ,P-cap touch with flat design
- Intel® Celeron® Bay Trail-M N2930, 1.83 GHz
- SUS 316 / AISI 316 stainless steel for food and chemical industries
- Full IP69K waterproof enclosure
- A true flat, easy-to-clean front surface with edge-to-edge design
- Plenty of I/Os, including USB 2.0, RS232 and RJ45-10/100/1000 LAN
- Waterproof ports with adapter cables for external connectivity
- Support VESA/ YOKE mount
- Support Glove/ Rain mode
- Optical bonding (optional)



### OVERVIEW



#### Waterproof All-Around

The Panel PC fully complies with IP69K water and dust resistance to survive splashing conditions during stringent cleanup processes and strict hygiene demands in the Food, Beverage, and Pharmaceutical industries.



#### COMPREHENSIVE APPLICATIONS

#### Comprehensive Stainless Solution

The wide range of stainless human-machine interfaces (HMI) and Panel PCs are widely used for automation processes in Food & Beverage applications and chemical factories.



#### Projected Capacitive Multi-Touch (P-CAP)


The highly-sensitive touch screen and PCAP multi-touch support make it easy for users to key in data, rotate images, drag and drop files, and zoom in with two or more fingers.

### SPECIFICATIONS

| Display              |                                                                                |                     |                                                 |
|----------------------|--------------------------------------------------------------------------------|---------------------|-------------------------------------------------|
| Resolution           | 1920x1080                                                                      | Size                | 23.8 inches                                     |
| Contrast Ratio       | 3000:1                                                                         | Panel Brightness    | 250 nits                                        |
| View Angles          | 89,89,89,89                                                                    | Active Area         | 527.04x296.46 mm                                |
| Touch / Glass        | Projected Capacitive Multi Touch Screen                                        |                     |                                                 |
| System Specification |                                                                                |                     |                                                 |
| Processor            | Intel Celeron N2930 1.83GHz (up to 2.16GHz)                                    | Memory              | 1 x SO-DIMM, DDR3L 1600 MHz, 4GB 8GB (Optional) |
| Storage              | 1 x mSATA SSD 128GB.<br>mSATA SSD up to 512GB. (Optional)                      | Ethernet controller | 2 x Intel® Ethernet Controller                  |
| Operating System     | Windows 10 IoT Enterprise (64 bit) (Optional)<br>Linux Ubuntu 20.04 (Optional) | WLAN                | Support (Optional)                              |
| BT                   | Support (Optional)                                                             |                     |                                                 |
| Mechanical           |                                                                                |                     |                                                 |
| Dimension            | 620 x 390 x 56 mm                                                              | Mounting            | VESA Mount<br>Yoke Mount                        |
| Enclosure            | Stainless Housing                                                              | Cooling System      | Fanless design                                  |
| Environment          |                                                                                |                     |                                                 |

|                     |                                                                                                                                                                                                                                                               |                       |                                                              |
|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|--------------------------------------------------------------|
| Operating Humidity  | 10% to 90% RH, Non-Condensing                                                                                                                                                                                                                                 | Operating Temperature | 0°C to 45°C                                                  |
| Storage Temperature | -20°C to 60°C                                                                                                                                                                                                                                                 | IP rating             | IP69K                                                        |
| Certification       |                                                                                                                                                                                                                                                               |                       |                                                              |
| Certification       | CE, FCC                                                                                                                                                                                                                                                       |                       |                                                              |
| IO Ports            |                                                                                                                                                                                                                                                               |                       |                                                              |
| USB Port            | 1x M12 Waterproof Connector for 2 x USB2.0                                                                                                                                                                                                                    | Serial Port           | 1 x M12 waterproof connector for RS232                       |
| LAN                 | 1 x Waterproof Giga LAN RJ45 Connector                                                                                                                                                                                                                        | Indicator             | 1 x LED Indicator for power<br>1 x LED Indicator for storage |
| Control             |                                                                                                                                                                                                                                                               |                       |                                                              |
| Button              | 1 x Power Button<br>1 x Reset Button                                                                                                                                                                                                                          |                       |                                                              |
| Accessory           |                                                                                                                                                                                                                                                               |                       |                                                              |
| Accessory           | 100~240V AC to DC Adapter with waterproof connector<br>Power Cord<br>External USB cable with waterproof connector<br>External COM cable with waterproof connector<br>External LAN cable with waterproof connector<br>Waterproof caps<br>Manual<br>VESA screws |                       |                                                              |
| Power               |                                                                                                                                                                                                                                                               |                       |                                                              |
| Power Rating        | 12V DC (M12 type)                                                                                                                                                                                                                                             |                       |                                                              |

## DIMENSIONS UNIT:MM

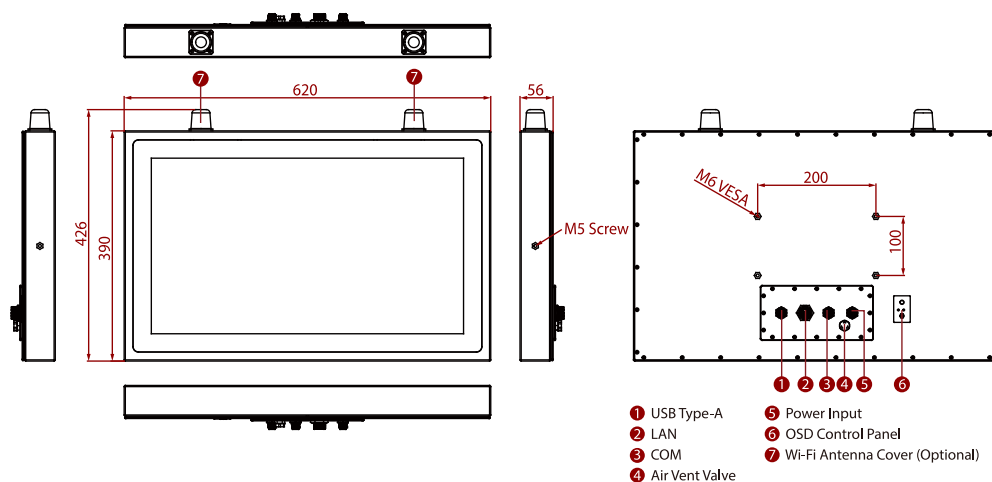

## NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.
3. All specifications are subject to change without prior notice.

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660