

DFI-ACP

○ Revision Control ○ Long Life Cycle



EL630-NR Intel® Q45 ATX Board

PROCESSOR

- LGA 775 socket for:
 - Intel® Core™2 Quad Q9400
 - Intel® Core™2 Duo E8400/E7400/E6400/E4300
 - Intel® Pentium® E6500/E5300/E2160
 - Intel® Celeron® E3400/E1500/440
- Supports Intel Enhanced Memory 64 Technology (EMT64T)
- Supports Enhanced Intel SpeedStep Technology (EIST)
- 1333/1066/800MHz FSB

CHIPSET

- Intel® chipset
 - Intel® Q45 Express chipset
 - Intel® ICH10DO I/O Controller Hub

SYSTEM MEMORY

- Four 240-pin DDR3 DIMM sockets
- Supports DDR3 800/1066MHz DIMM
- Maximum memory bandwidth of 17GB/s in dual-channel mode when using DDR3 1066MHz
- Supports dual channel memory interface
- Supports up to 8GB system memory
- Supports unbuffered x8 and x16 DIMMs

EXPANSION SLOTS

- 1 PCI Express x16 slot (PCIe 2.0)
- 1 PCI Express x4 slot (PCIe 1.1)
- 5 PCI slots (PCI 2.3)

ONBOARD GRAPHICS FEATURES

- Integrated Intel GMA 4500
 - Supports 3D, 2D and video capabilities, DX10 and OpenGL 2.1
- Display ports: DVI-I (Chrontel CH7307C) and VGA

ONBOARD AUDIO FEATURES

- Realtek ALC262 2-channel High Definition Audio
- Two 24-bit stereo DACs and three 20-bit stereo ADCs
- S/PDIF audio interface

ONBOARD LAN FEATURES

- Two Realtek RTL8111C PCI Express Gigabit Ethernet controllers
- Supports 10Mbps, 100Mbps and 1Gbps data transmission
- IEEE 802.3 (10/100Mbps) and IEEE 802.3ab (1Gbps) compliant

SERIAL ATA (SATA) INTERFACE

- 6 SATA (Serial ATA) interfaces compliant with SATA 1.0 specification
- SATA speed up to 3Gb/s (SATA 2.0)
- Supports RAID 0/1/5/10

IDE INTERFACE

- Supports up to two IDE devices
- Supports Ultra ATA 133/100/66/33

REAR PANEL I/O PORTS

- 1 mini-DIN-6 PS/2 mouse port
- 1 mini-DIN-6 PS/2 keyboard port
- 2 DB-9 RS232 serial ports
- 1 DVI-I port (DVI-D signal only)
- 1 DB-15 VGA port
- 2 RJ45 LAN ports
- 4 USB 2.0/1.1 ports
- Mic-in, line-in and line-out

I/O CONNECTORS

- 4 connectors for 8 external USB 2.0/1.1 ports
- 2 connectors for 2 external RS232 serial ports
- 1 8-bit DIO connector
- 1 front audio connector for line-out and mic-in jacks
- 1 CD-in connector
- 1 S/PDIF connector
- 6 Serial ATA connectors
- 1 40-pin IDE connector
- 1 FDD connector
- 1 24-pin ATX power connector
- 1 4-pin 12V power connector
- 1 chassis intrusion connector
- 1 front panel connector
- 3 fan connectors

BIOS

- Award BIOS
- 8Mbit SPI BIOS

ENERGY EFFICIENT DESIGN

- ACPI v3.0b specification
- System Power Management
- Wake-On-Events include:
 - Wake-On-PS/2 Keyboard/Mouse
 - Wake-On-USB Keyboard/Mouse
 - Wake-On-LAN
 - Wake-On-Ring
 - RTC timer to power-on the system
- AC power failure recovery

DAMAGE FREE INTELLIGENCE

- Monitors CPU/system temperature and overheat alarm
- Monitors CPU/DIMM/3.3V/5V/12V/Chipset Vcore/VBAT voltages and failure alarm
- Monitors CPU/system/2nd fan speed and failure alarm
- Read back capability that displays temperature, voltage and fan speed
- Watchdog timer function

TEMPERATURE

- 0°C to 60°C


HUMIDITY

- 10% to 90%

PCB

- ATX form factor
- 305mm (12") x 244mm (9.6")

REAR PANEL I/O PORTS

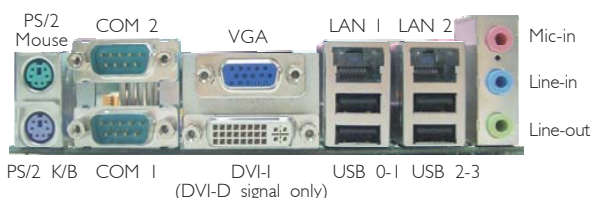

DFI reserves the right to change the specifications at any time prior to the product's release. Changes thereafter will be based on the product's revision. Please contact your sales representative for the exact revision offered in your area. All product names mentioned are trademarks of their respective companies.
© December 13, 2010 DFI Inc.

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660