

ViTAM-124PG(H)


23.8" IP66 / IP69K Stainless Steel Display

Industrial Panel PC

HMI Controller

Industrial
Display Monitor

Box PC




Features

- 23.8" New Generation Stainless Steel Display
- True Flat Front Bezel Design and Grade 304 Stainless Steel Enclosure (Grade 316 for Option)
- IP66/IP69K Rated with M12 (W.F.) Connectors
- Support Resistive Touch, Projected Capacitive Touch, and Glass
- Touch on/off Button on the Side Edge for Hygienic Cleaning
- Support Ergonomic Versatile Mounting: Yoke Mounting / Space-saving VESA 200 x 100 mm Mounting

Specifications

| IO Port | | |
|--------------------------------|---|--------------------------|
| VGA | 1 x M12 12-pin for VGA with waterproof cover and chain | |
| HDMI | 1 x W.F. HDMI with waterproof cap | |
| USB | 1 x M12 USB 2.0 with waterproof cover and chain | |
| Speaker | 1 x 2W IP65 speaker (option) | |
| OSD Control Membrane | OSD on the rear side | |
| Power Connector | 1 x M12 3-pin for DC power with waterproof cover and chain | |
| Display | Standard | High Brightness Optional |
| Display Type | 23.8" TFT-LCD | 23.8" TFT-LCD |
| Max. Resolution | 1920 x 1080 | 1920 x 1080 |
| Max. Color | 16.7M | 16.7M |
| Luminance (cd/m ²) | 250 | 1000 |
| View Angle | 178(H) /178(V) | 178(H) /178(V) |
| Contrast | 3000:1 | 3000:1 |
| Backlight Lifetime | 30,000 hrs | 30,000 hrs |
| Touch Screen | | |
| Type | Projected Capacitive Touch (for P model) Glass (for G model) | |
| Interface | USB | |
| Light Transmission(%) | Projected Capacitive : 90% | |
| Power | | |
| Power Input | DC 9~36V | |
| Power Consumption | ViTAM-124P: Max 32W | |
| | ViTAM-124PH: Max 45W | |
| Mechanical | | |
| Construction | 304 Stainless steel chassis(default), 316 Stainless steel chassis(optional) | |
| Mounting | VESA Mount 200 x 100, Yoke mount (option) | |
| IP Rating | Total IP66/IP69K | |
| Dimensions | 656 x 423 x 53 mm | |
| Net Weight | 12.6 kg | |
| Environmental | | |
| Operating Temperature | 0~50°C | |
| Storage Temperature | -30~70°C | |
| Humidity | 10 to 95% @ 40°C, non- condensing | |
| Certificate | CE/FCC Class A | |

Dimensions

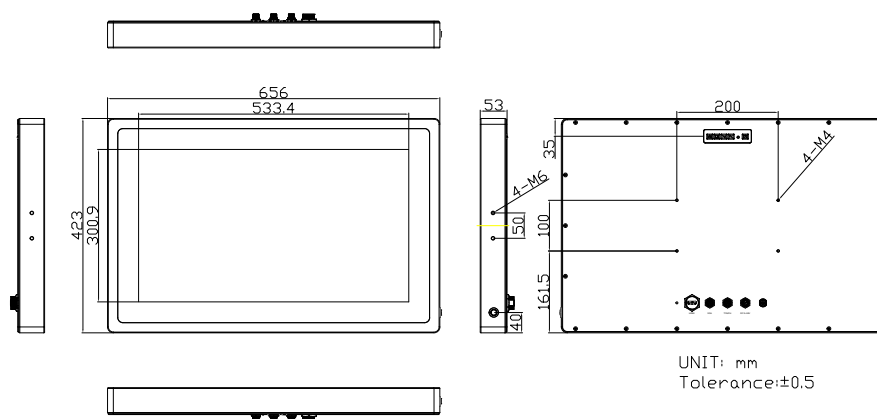

| Ordering Information | |
|----------------------|---|
| ViTAM-124P | 23.8" FHD IP66/IP69K stainless steel display, VGA/HDMI input, OSD on the rear side, projected capacitive touch, 9~36V DC power input with Adapter |
| ViTAM-124G | 23.8" FHD IP66/IP69K stainless steel display, VGA/HDMI input, OSD on the rear side, protection glass, 9~36V DC power input with Adapter |
| ViTAM-124PH | 23.8" FHD IP66/IP69K stainless steel display, VGA/HDMI input, OSD on the rear side, projected capacitive touch, 9~36V DC power input with Adapter, 1,000 nits LCD |
| ViTAM-124GH | 23.8" FHD IP66/IP69K stainless steel display, VGA/HDMI input, OSD on the rear side, protection glass, 9~36V DC power input with Adapter, 1,000 nits LCD |

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660