

Edge AI GPU Computing

# ABOX-5210-M12X

Taiwan Patent No. M447854, M565941, M592609

Intel Gen 10th 10 Cores Xeon, i9 CPU w/ 10 x GbE (2 x RJ45 and 8 x M12 X Coded Connectors)/ 3 x COM/ 3 x DP/ 4 x USB 3.2 Gen 1x1/ 9-48V Input AI GPU Computing

## Features

- Intel GEN 10th 10 Cores Xeon W-1290TE / i9-10900TE
- 8 x DI, and 4 x DO and 3 x RS-232/422/485
- 1 x M.2 B key, 1 x M.2 A-E key & 3 x MiniPCle expansion slots
- Dual Hot Swappable SATA Storage RAID 0,1,5
- 9-48V DC Input and Operating Temp.: -40~70°C
- 2 x RJ45 Ports and 8 x M12 X Coded Connectors for GbE
- Rolling Stock EN 50155 and EN 50121-3-2 certified



POE



GPS



Wireless



Wide Range



Delay Time

## Introduction

The ABOX-5210(G)-M12X is powered by Intel GEN 10th 10 Cores Xeon W-1290TE / i9-10900TE AI GPU Computing. Specifically designed for railway rolling stock applications, it guarantees reliable performance, withstanding environmental disturbances such as severe shock and vibration in railway vehicle applications. ABOX-5210(G)-M12X features 8 x M12 X Coded Connectors for GbE and certified Rolling Stock EN50155 & EN 50121-3-2 that cater to rolling stock's application including traffic safety systems, passenger information systems, broadcasting systems as well as surveillance systems and more. Furthermore, with the new Intel Gen 10 Comet Lake and NVIDIA® GeForce GTX 1650 or GTX 1060 technology's outstanding performance, ABOX-5210(G)-M12X can effectively support smart public transit systems, offering solutions to enhance the operational efficiency of railways and railway station management.

## Specifications


System	
CPU	Intel Gen10 Xeon W-1290TE (20M Cache 2.0GHz up to 4.6GHz)*
	Intel Gen10 Core i9-10900TE (20M Cache 2.0GHz up to 4.5GHz)
	Intel Gen10 Core i7-10700TE (16M Cache 2.0GHz up to 4.4GHz)
	Intel Gen10 Core i5-10500TE (12M Cache 2.3GHz up to 3.7GHz)
	Intel Gen10 Core i3-10100TE (6M Cache 2.3GHz up to 3.6GHz)
	Intel Gen10 Core G5900TE (4M Cache 3.0GHz)
Chipset	Q470E / W480E
Memory	2 x DDR4 2666/2933 MHz SO-DIMM up to 64GB (Optional ECC support with Xeon W-1290TE)
LAN Chipset	9 x Intel i210-AT and 1 x i219LM (iAMT9.5 w/ i5, i7 only) Gb/s Ethernet Controllers Onboard Support PXE and WOL
Watchdog	1 ~ 255 Level Reset
TPM	2.0
I/O	
Serial Port	3 x RS 232/422/485 (option additional 1 x RS 232/422/485)
USB Port	4 x USB 3.2 Gen 1x1 Ports
LAN	2 x RJ45 Ports and 8 x M12 X coded connectors for GbE (Optional 8 x PoE total Max.120W)
Video Port	3 x DP
DIO Port	8 x DI (5~48VDC) and 4 x DO (5VDC, 100mA)
Audio	1 x Line-out, 1 x Line-in and 1 x Mic-in
Expansion Bus	2 x Full Mini-PCle Slots, 1 x Mini-PCle w/ USB interface only for WWAN sharing 2 x SIM Card Sockets with M.2 B Key 3042 slot, 1x M.2 A-E Key 2230 slot, 1 x M.2 B Key 3042 slot w/ 2 x SIM Card Sockets for WWAN Patent No. : M592609 - Automatic SIM Card Detection
Graphics	
CPU Built-in Graphics	Intel® UHD Graphics 630 Max Resolution (DP1.2) : 4096x2304@60Hz

Storage	
Type	2 x 2.5" Drive Bay for SATA Type HDD/SSD RAID 0, 1, 5 1 x M.2 M key 2280 slot supports NVMe and SATA SSD * Thermal heatsink is required for M.2 storage. Please contact sales window for more information.
Environmental	
Operating Temp.	-40°C ~ 70°C w/0.6 m/S airflow Patent No. : M565941 - Thermal Cooling
Storage Temp.	-40°C ~ 80°C
Relative Humidity	10% RH ~ 90% RH (non-condensing)
Vibration (with SSD)	IEC60068-2-64, random, 2.5G@5~500Hz, 1hr/axis MIL-STD-810G, Method 514.6, Procedure I, Cat.4, Operating
Shock	Operating: MIL-STD-810G, Method 516.6, Procedure I, Trucks and semi-trailers=15G (11ms) with SSD
Certifications	CE, FCC Class A, E13, EN50155
Power Requirement	
Power Input	9V - 48V DC Power Input
Power Protection	Automatics Recovery Short Circuit Protection
Power Mgmt.	Vehicle Power Ignition for Variety Vehicle
Power Off Control	Power off Delay Time Setting by BIOS and Software
Battery Backup (Option)	Internal Battery Kit for 10 Mins Operating (P/N: BAT-5200 kit, Operating Temp. -20 ~ 60°C) *UPS backup time varies depending on actual overall system power consumption. Patent No. : M447854 - Build-in Battery
Mechanical	
Construction	Aluminum Alloy
Mounting	Wall-mount
Weight	5300g (Barebone)
Dimensions	260(L) x 250(W) x 95(H) mm

All specifications are subject to change without notice.

ABOX-5210-M12X

## Dimensions

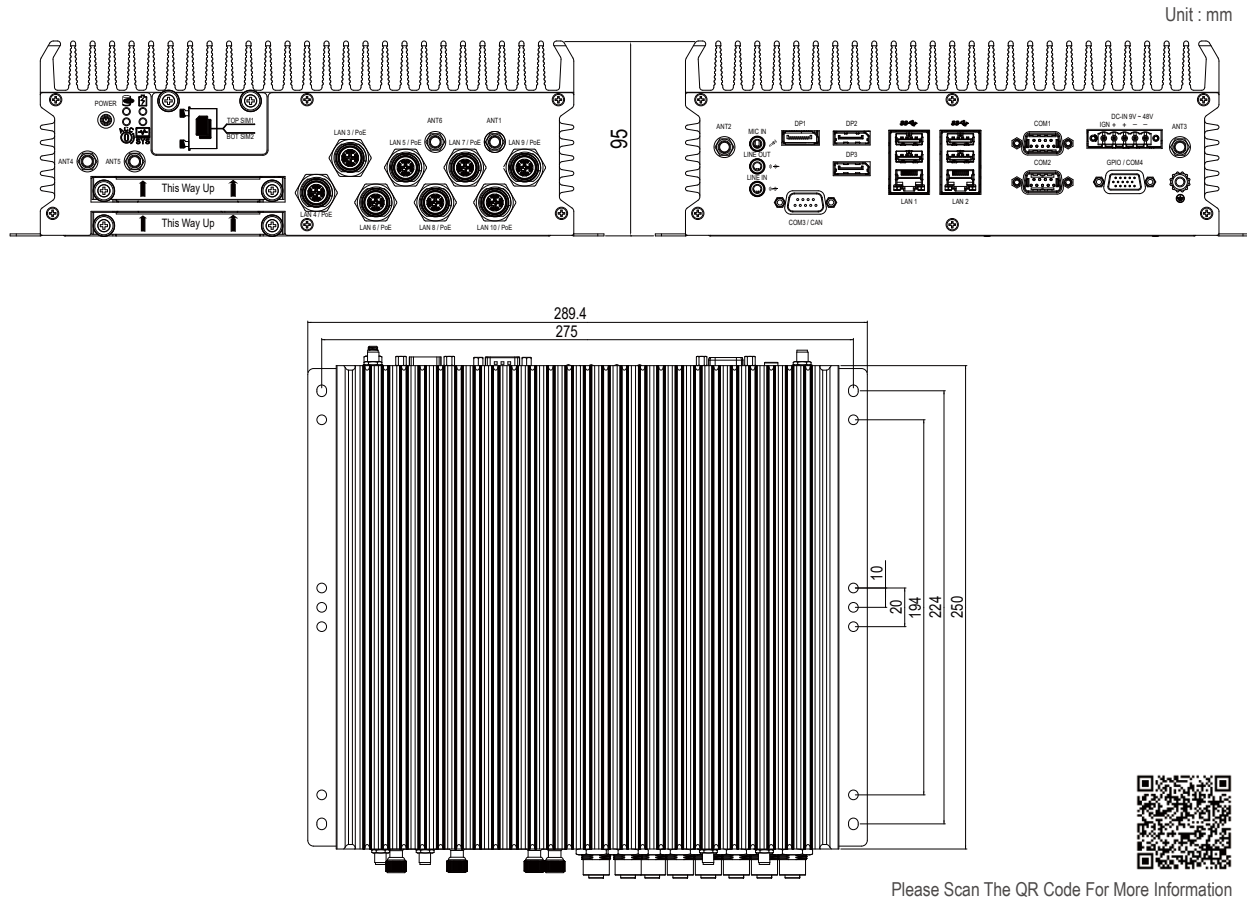

Please Scan The QR Code For More Information

## Ordering Information

Part Number	ABOX-5210x-M12X-yy (x= P= w/PoE, x= Empty= w/o PoE, yy=Z9= W-1290TE, yy= i9= i9-10900TE, yy= i7= i7-10700TE, yy= i5= i5-10500TE, yy= i3= i3-10100TE, zz= C1= G5900TE)
Description	Intel Gen 10th 10 Cores Xeon, i9 CPU w/ 2 x RJ45 Ports and 8 x M12 X coded connectors for GbE/3 x COM/3 x DP/4 x USB 3.2 Gen 1
State of Origin	Made in Taiwan

## Optional Accessories

DRAM	DDR4-2933 MHz SO-DIMM, 4GB~32GB, 0~70°C/-40~85°C
SSD	M.2 2280 B-M key NVMe TLC -40~85°C 64GB~1TB w/ Heatsink M.2 2280 B-M key SATA TLC -40~85°C 64GB~1TB w/ Heatsink 2.5 inch SATA TLC -40~85°C 64GB~2TB
Wifi	M.2 2230 A-E key 802.3 a/b/g/n/ac
Modem	M.2 3042 B key LTE module
GPS	MiniPCIe GPS module
CANBUS	MiniPCIe CANBUS module
Battery backup kit	BAT-5200 Battery Kit, 5200m/h, -30~60°C, discharge -20~60°C, operating about 10 mins
Power adapter	AC/DC 220W/24V or 280W/24V power adapter

All specifications are subject to change without notice.

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660