

MTC-8015W

15.6" Fanless Multi-Touch Computer with Intel Atom® x7-E3950 Processor, 2 GigE LAN, 4 USB, 2 COM, DC 9 to 36V



Features

- 15.6" 1366 x 768 (16:9) WXGA TFT LED LCD
- 10-point Projected Capacitive Multi-touch Screen
- Intel Atom® x7-E3950 Processor
- Fanless design supports -10°C to 60°C operating temperature
- Easy-access external SSD/HDD Kit
- DC 9V to 36V wide range power input
- Supports Panel Mount and VESA Mount (75 x 75, 100 x 100)
- IP65 Front Panel Protection
- 2 Mini PCIe for WiFi/4G/3G/LTE/GPRS/UMTS




Specifications

Panel	
Panel Type	WXGA TFT LED Type LCD
Size	15.6"
Max. Resolution	1366 x 768
Display Color	16.7M
Brightness (cd/m²)	400
View Angle (H/V)	170/160
Contrast Ratio	500 :1
Touch Screen	
Touch Screen Type	10-point Projected Capacitive
Transparency	≥ 91%
Surface Hardness	7H Surface Hardness
Control Interface	USB Type
System	
Processor	Intel Atom® x7-E3950 Processor
Chipset	Intel® SoC (Apollo Lake)
Memory	1 DDR3L 1866MHz SO-DIMM, up to 8GB
Graphics Processor	Intel® HD Graphics 505
I/O Interface	
Serial	2 RS-232/422/485 (DB9 Type)
USB	▪ 2 USB 3.0, Type A ▪ 2 USB 2.0, Type A
LED	Power
Display	▪ VGA : Up to 1920 x 1440 @60Hz ▪ Digital Display : Up to 3840 x 2160 @30Hz
Expansion	
Mini PCIe	2 Mini PCIe Socket : ▪ 1 Full-size for PCIe/USB/SIM Socket ▪ 1 Full-size for PCIe/USB/SATA
Storage	
SATA	1 SATA III (6Gbps)
mSATA	1 SATA III (Full Size Mini PCIe, 6Gbps)
Storage Device	1 2.5" SSD/HDD Kit


Ethernet	
LAN 1	Intel® I210 GigE LAN, RJ45 Type
LAN 2	Intel® I210 GigE LAN, RJ45 Type
Power	
Power Input	9V to 36V DC-in
Power Interface	3-pin Terminal Block (V+/V-/GND)
Others	
TPM	Optional Infineon SLB9665 supports TPM 2.0, LPC Interface
Watchdog Timer	Reset : 1 to 255 sec./min. per step
Smart Management	Wake on LAN, PXE supported
Software Support	
OS	Windows 10, Linux
Mechanical	
Dimensions (W x H x D)	391.5mm x 242.0mm x 66.1mm (15.41" x 9.53" x 2.60")
Weight	3.6 kg (7.94 lb)
Mounting	▪ Panel Mount ▪ VESA Mount (75 x 75, 100 x 100)
Environment	
Operating Temperature	-10°C to 60°C (14°F to 140°F)
Storage Temperature	-20°C to 60°C (-4°F to 140°F)
Humidity	5% to 95% Humidity, non-condensing
Relative Humidity	95% @55°C
Shock	IEC 60068-2-27 ▪ 20G, Half-sine, 11ms
Vibration	IEC 60068-2-64 ▪ Non-operation : 10Hz to 200Hz, 1Grms, X, Y, Z, 30 mins each Axis
EMC	CE, FCC

Dimensions

Unit : mm/ inch

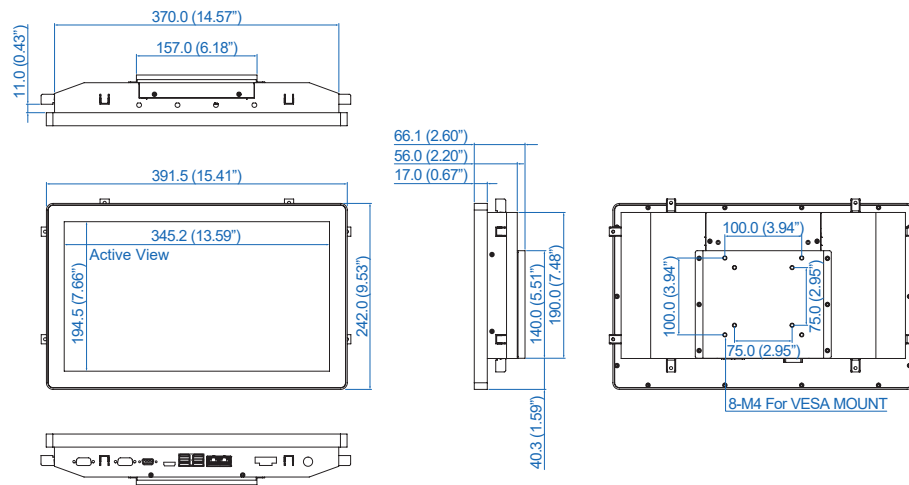

Bottom I/O

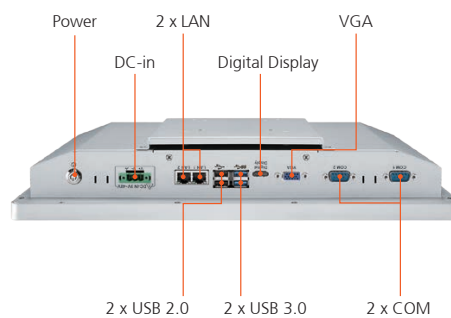

Order Information

MTC-8015W-3950	MTC-8015W, Intel Atom® x7-E3950, 2 GigE LAN, 2 COM, DC 9 to 36V
-----------------------	---

Accessories

DDR3L 8G	Certified DDR3L 8GB 1866MHz RAM
DDR3L 4G	Certified DDR3L 4GB 1866MHz RAM
PWA-120W	120W, 24V, 90V AC to 264V AC Power Adapter with 3-pin Terminal Block
4G Module	Mini PCIe 4G/GPS Module with Antenna
WiFi & Bluetooth	WiFi & Bluetooth Module with Antenna

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660