






Features :

- 24" 1920 x 1080 resolution with projective capacitive multi-touch screen
- Edge-to-edge narrow bezel design and fanless cooling system
- Color calibrated for ECDIS compliance
- Capacitive touch keys for quick function access and display control (Support ECDIS DAY, DUSK, and NIGHT mode switching)
- Optional 4 x COM port (NMEA 0183 protocol) 422/485 switchable via software
- Compliant with marine standards (DNV2.4, IEC 60945 4th, IACS-E10)
- Support capacitive touch key lock / touchscreen lock function



1. 1 x 2.5" Removable HDD
2. 2 x LAN
3. 1 x USB 2.0
4. 1 x HDMI
5. 1 x USB 3.0, 1 x USB 2.0
6. 1 x RS232/422/485
7. 1 x DC Power Input
8. 1 x 8 Channel DI/DO (Optional)
9. 4 x NMEA 0183 Port (Optional)

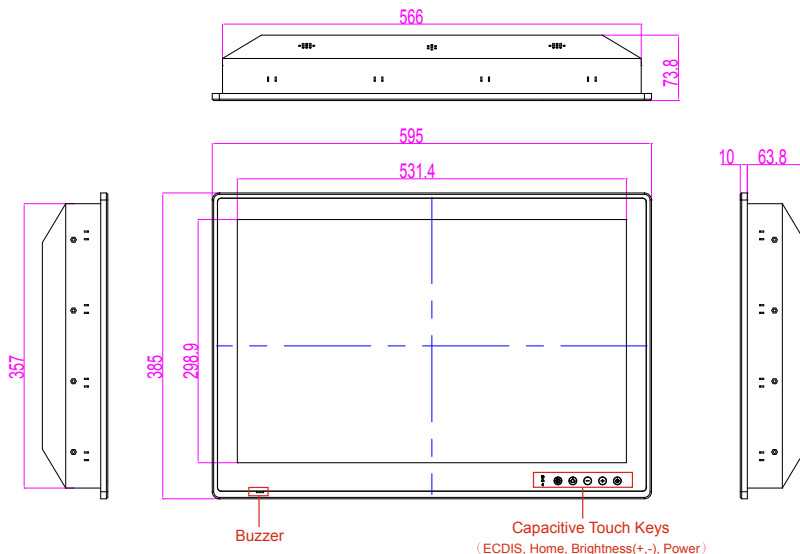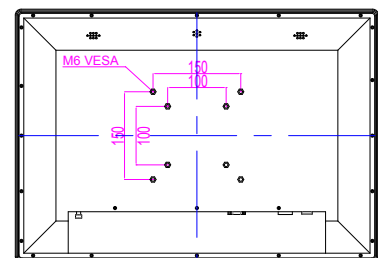

* Note: this is a simplified drawing and some components are not marked in detail. *Please contact our sales representative if you need further product information.

Display Specifications :

Resolution	: 1920 x 1080
Pixel Pitch	: 0.276 (H) x 0.276 (V) mm
Contrast Ratio	: 5000:1(typ.)
Brightness	: 350 cd/m ² (typ.)
Viewable Angle	: 89°/89°/89°/89° (typ.) (Up/Down/Left/Right)
Active Display Area	: 531.36(H)x 298.89 (V) mm
Max Colors	: 16.7 M colors, 8 bits/color
Touch Screen	: Projective Capacitive Multi-touch (Optional AR Protection Glass)

System Specifications :

Processor	: Intel® Celeron® Bay Trail-M N2930 1.83GHz
System Chipset	: Intel® ATOM™ SoC Integrated
System Memory	: 1 x DDR3L-1066 SODIMM (Default 4GB, Max 8GB)
Ethernet	: Dual Ethernet Gb LAN
Storage	: 64GB mSATA SSD (Up to 256GB)
Second Storage	: 2.5" Removable Storage Tray
Speaker	: 2 x 2W Speaker
Buzzer	: 75 dB~80 dB, 2300 Hz, 1m

Power Specifications :

Power Input	: 24V DC-in with Isolation (9~36V acceptable)
Power Consumption	: 80W (Max)

Certification

DNV 2.4, IEC60945 4th, CE, FCC

Mechanical

Mechanical Mounting	: Panel Mount, VESA Mount
Dimension	: 595mm x 385mm x 63.8mm
Panel Mount Cutout	: 572mm x 363mm
Housing	: Anodized Aluminum Bezel
IP Rating	: IP66 (Front Side)

Environmental

Operating Temperature	: -15 to 55 deg.C
Operating Humidity	: 5% to 95% (non condensing)
Anti-Vibration	: 0.7g@DNV2.4 (Class A)
Anti-Shock	: 15G, 11ms duration

Input / Output Connectors

Ethernet LAN	: 2 x RJ45
COM (D-SUB)	: 1 x RS232/422/485
USB	: 2 x USB2.0 , 1 x USB3.0
HDMI	: 1 x HDMI
NMEA Interface	: 4 x NMEA 0183 Port (Optional)
Digital IN/OUT	: 8 Channel Isolated Digital Input/Output (Optional)
DC power	: 1 x 3-Pin Terminal Block (Phoenix type)

OS Support :

Operating System (Optional) : Windows Embedded 8.1 Industry PRO
Windows Embedded 8 Std.
Windows Embedded Std. 7
Windows 7 PRO for Embedded System

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660