

W12IE3S-GSB1

12.3" Intel® Celeron® N6211 G-WIN GS-Series Full IP65 PCAP Panel PC



KEY FEATURES

- 12.3" 1920 x 720 panel with projected capacitive multitouch screen
- Intel® Celeron® N6211 Elkhart Lake
- M12 waterproof connectors , IP65 waterproof and dustproof
- Shock and vibration resistance according to MIL-STD-810H
- Support Windows 10 IoT Enterprise or Linux
- Wide power input 10-60V DC with ignition

INTRODUCTION

Winmate G-WIN GS Series Panel PC Series is engineered for demanding industrial applications, offering sizes from 7" to 15" with a fanless cooling system and ultra-low power consumption. These robust Panel PCs feature edge-to-edge design, PCAP multi-touch screens, and full IP65 protection with waterproof M12 connectors, ensuring resistance to water, dust, and harsh conditions. With versatile I/O options, rugged durability, and sleek functionality, they are ideal for manufacturing, outdoor kiosks, and other challenging environments.

OVERVIEW



Dust and Water Protection

Winmate G-WIN GS series panel PCs are designed with protection against dust and water splash according to IP65 standards. Making the off-highway automotive HMIs able to meet the need for advanced computing power in road-moving vehicles.

Fit for off-highway vehicle applications

Winmate automotive HMI solutions are built with high-performance computing technology in a compact body. It is suitable to be installed in a space-limited driving control room for off-highway vehicles used in agriculture, construction, material handling equipment, etc. The 12.3-inch HMIs can be VESA mount as well as integrated into the vehicle dashboard. Due to its compact measures, machine operators benefit from a less restricted view outside their cabins, easily integrated into ergonomic workplaces.





Comprehensive Waterproof I/O Ports

The automotive HMIs are designed for seamless integration with Electronic Control Units (ECU) for current and future-proof vehicle architectures CAN, Ethernet, RS232, DIDO, and USB interfaces are provided in the M12 connectors, which are waterproof for varying industrial environments.

Engineered for Harsh Environments

Suitable for offering touch control and display functions for all-terrain vehicles, EV trucks, forklifts, AGVs in smart warehouses, or dispatching consoles in cranes, mining cars, high-speed railways trains, and so on. The GWIN GS product series is engineered for harsh environments to withstand extreme temperatures and vibrations compliant with MIL-STD 810H.

The HMI panels are for high brilliance and outdoor uses. The integrated projective capacitive touchscreen is multi-touch capable and can be operated with fingers, wet fingers, and gloves.



SPECIFICATIONS

Display

Touch / Glass	Projected Capacitive Multi Touch Screen	Resolution	1920x720
Size	12.3 inches	Contrast Ratio	1000:1
Panel Brightness	1000.0 nits	View Angles	88,88,88,88
Active Area	292.92x110.22 mm		

System Specification

Processor	Intel Celeron N6211 1.2GHz (up to 3.0GHz)	Memory	1 x SO-DIMM, DDR4 3200 MHz, 4GB 8GB (Optional) 16GB (Optional)
Storage	1 x M.2 2242 SSD 128GB	Ethernet controller	1 x Intel® Ethernet Controller
Security	TPM 2.0	Operating System	Windows 10 IoT Enterprise (64 bit) Linux Ubuntu 20.04 (Optional)
WLAN	Support (Optional)	BT	Support (Optional)
WWAN	4G/LTE (Optional)	GNSS	GPS, GLONASS (Optional)

Mechanical

Dimension	325.02 x 146.5 x 45 mm	Mounting	VESA Mount
Cooling System	Fanless Design		

IO Ports

USB Port	1 x USB 2.0 (M12 type) 1 x Micro USB (Host)	Serial Port	1 x RS232/422/485 (Default RS232) (Optional)
SD Card Slot	1 x Micro SD Card Slot	SIM Card Slot	1 x SIM card slot (Optional)
LAN	1 x LAN 10/100/1000 Mbps (M12 type)	DIDO	6 x Digital Input (M12 type) (Optional)
CANBUS	2 x CANBus (M12 type) (Optional)		

Environment

Operating Humidity	5% to 95% RH	Operating Temperature	-20°C to 60°C
Storage Temperature	-30°C to 70°C	Shock	MIL-STD-810H Method 516.8 Procedure I
Vibration	MIL-STD-810H Method 514.8 Procedure I	IP rating	IP65

Certification

Certification	CE, FCC
---------------	---------

Control

Button	1 x Power Button
--------	------------------

Power


Power Rating	10V~60V with ignition control	Adapter	12V 50W
--------------	-------------------------------	---------	---------

Accessory

Accessory	Quick Start Guide M16 Power Cable M12 COM Port/CANBus Cable M12 Digital Input/CANBus Cable M12 USB/ LAN Cable	Optional Accessory	WWAN Antenna x 2 (Optional) GPS Antenna, 3m (Optional)
-----------	---	--------------------	---



DIMENSIONS UNIT:MM

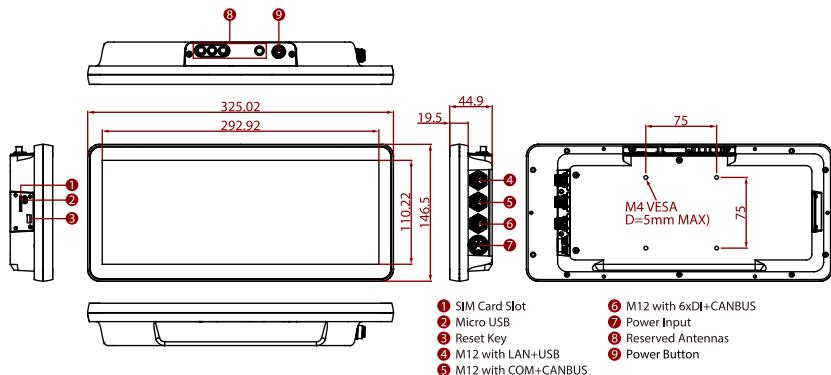

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660