

104-II32-4RO

36-Channel

## PC/104 ISOLATED INPUT/RELAY OUTPUT WITH COS



### KEY FEATURES:

#### INPUTS

- 32 optically-isolated, non-polarized digital inputs
- Change of State (COS) detection selectable on nybble basis
- Interrupt sharing for simplified system development
- 3 to 31 volt AC or DC signals
- Switchable filters
- Schmitt trigger buffers
- I/O access with register definitions provided

#### OUTPUTS

- 4 Form C (NC, NO, C) SPDT relays
- Contact ratings 24VDC @ 1A and 115VAC @ 0.5A
- +5V power with onboard resettable fuse for external circuits

The 104-II32-4RO is a 36-channel PC/104 utility board featuring 32 optically isolated digital inputs with change of state (COS) interrupt generation and 4 handy electromechanical relay outputs. The board provides connections to an assortment of devices including sensors, switches, controllers, powered circuits, and other user inputs. The inputs may be driven by either DC sources of 3-31V (or higher by special order) or AC sources at frequencies of 40Hz to 10kHz. Optically isolating the digital inputs from each other, and from the computer, assures smooth, error-free data transmission in noisy, real-world environments. The 104-II32-4RO can be used in a variety of PC/104 applications such as embedded SCADA systems, industrial automation, process control, scientific apparatus, and embedded OEM.

Each input circuit includes a jumper selectable filter to accommodate AC inputs and is also useful for slow DC inputs in noisy environments. The filter may be manually disabled to improve the board's typical response time to 10µs when used with faster DC inputs. To prevent erroneous input state change detections and interrupts, Schmitt triggers are used which provide a reliable logic signal to the computer interface. The electromechanical relays are more flexible than FET and solid state outputs in regards to the kind of signals that can be switched. Another useful feature of the board is a fused +5V general purpose output at the connector.

System interrupts are software controlled, enabling the board to generate an interrupt whenever one or more of the isolated digital inputs changes state. This eliminates the need for constant polling and greatly frees up system

resources. IRQ sharing with other system devices is enabled for simplified system development and installation.

#### SOFTWARE

The 104-II32-4RO is supported for use in most operating systems and includes a free DOS, Linux and Windows 95/98/Me/NT/2000/XP/2003 compatible software package. This contains sample programs and source code in "C" for DOS, and Visual Basic, Delphi, C++ Builder, and Visual C++ for Windows. Also incorporated is a graphical setup program in Windows. Third party support includes a Windows standard dll interface usable from the most popular application programs. Embedded OS support includes Windows XPe and CE. Linux support consists of installation files and basic samples for programming from user level via an open source kernel driver.




ACCES I/O Products, Inc. 10623 Roselle Street San Diego, CA 92121  
Tel: (858) 550-9559 (800) 326-1649 Fax: (858) 550-7322  
Email: [contactus@accessio.com](mailto:contactus@accessio.com) Website: [www.accessio.com](http://www.accessio.com)

104-II32-4RO

## 36-Channel PC/104 ISOLATED INPUT/RELAY OUTPUT WITH COS

### Block Diagram & Pin Configuration

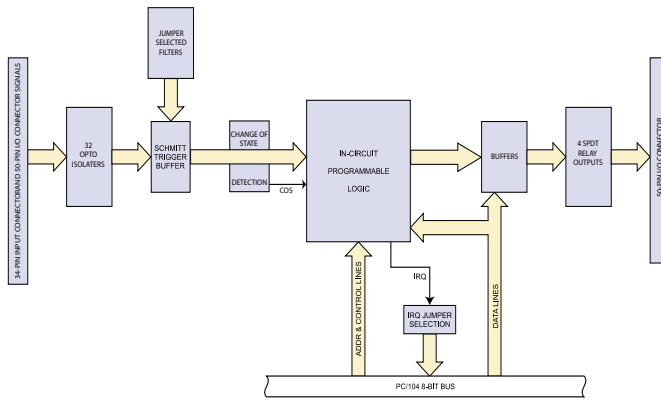

#### I/O HEADER

OUT0(NO)	01	02	OUT0(C)
OUT0(NC)	03	04	OUT1(NO)
OUT1(C)	05	06	OUT1(NC)
OUT2(NO)	07	08	OUT2(C)
OUT2(NC)	09	10	OUT3(NO)
OUT3(C)	11	12	OUT3(NC)
GND	13	14	Vcc
Vcc	15	16	GND
IIN31 A	17	18	IIN31 B
IIN30 A	19	20	IIN30 B
IIN29 A	21	22	IIN29 B
IIN28 A	23	24	IIN28 B
IIN27 A	25	26	IIN27 B
IIN26 A	27	28	IIN26 B
IIN25 A	29	30	IIN25 B
IIN24 A	31	32	IIN24 B
NC	33	34	NC
IIN23 A	35	36	IIN23 B
IIN22 A	37	38	IIN22 B
IIN21 A	39	40	IIN21 B
IIN20 A	41	42	IIN20 B
IIN19 A	43	44	IIN19 B
IIN18 A	45	46	IIN18 B
IIN17 A	47	48	IIN17 B
IIN16 A	49	50	IIN16 B

#### ISOLATED INPUTS

IINO A	01	02	IINO B
IIN1 A	03	04	IIN1 B
IIN2 A	05	06	IIN2 B
IIN3 A	07	08	IIN3 B
IIN4 A	09	10	IIN4 B
IIN5 A	11	12	IIN5 B
IIN6 A	13	14	IIN6 B
IIN7 A	15	16	IIN7 B
NC	17	18	NC
IIN8 A	19	20	IIN8 B
IIN9 A	21	22	IIN9 B
IIN10 A	23	24	IIN10 B
IIN11 A	25	26	IIN11 B
IIN12 A	27	28	IIN12 B
IIN13 A	29	30	IIN13 B
IIN14 A	31	32	IIN14 B
IIN15 A	33	34	IIN15 B

### Specifications

#### Opto-Isolated Inputs

Inputs	32 non-polarized opto-isolated with change of state (COS) detection
Input voltage	3V to 31V DC or AC rms (40 to 10KHz)
Input impedance	1.8K Ohm in series with opto coupler (two LEDs)
Filter	Independently selectable on a per-channel basis
Response time	10µs without filter, 4.7ms with filter
Isolation	Opto-Isolators specified to 500V
Interrupts	Generated in eight groups of four inputs each, IRQ sharing via tri-stated line driver (positive edge true)

#### Electromechanical Relay Outputs

Number and type	Four SPDT (Form C)
Contact rating	1A at 24VDC, 60VDC max (30W max), 0.5A at 125VAC max (62.5VA max)
Contact type	Single crossbar, Ag with Au clad
Contact resistance	100 milliohms max
Contact life	5,000,000 operations minimum
Operating time	5ms max
Release time	5ms max

#### General

I/O connections	50 and 34-pin headers
Power required	+5VDC @ 150mA (all relays ON, no load on fused 5V)
Operating temperature	-30 to +70°C (non-icing)
Storage temperature	-40 to +80°C
Weight	3.02 oz

### Ordering Guide

104-II32-4RO 32 optically isolated inputs and four relay outputs with change of state detection



ACCES I/O Products, Inc. 10623 Roselle Street San Diego, CA 92121  
Tel: (858) 550-9559 (800) 326-1649 Fax: (858) 550-7322  
Email: contactus@accessio.com Website: www.accessio.com

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660