

Surveillance/ Video Analytics



NRU-220S/ NRU-222S

NVIDIA® Jetson AGX Orin™ AI NVR for Intelligent Video Analytics

Preliminary Key Features



- Powered by NVIDIA® Jetson AGX Orin™ SoM bundled with JetPack 5.1.1
- Rugged -25°C to 70°C fanless operation (No throttling at 65°C with 64GB AGX Orin MAXN Mode)
- 2x 2.5 Gigabit Ethernet + 4x IEEE 802.3at Gigabit PoE+ ports
- 2x front-accessible 2.5" SSD trays
- 1x M.2 2280 M key socket for NVMe SSD
- 2x mini-PCIe sockets for WiFi/ GNSS/ NVMe/ CAN modules
- 1x 3042/ 3052 M.2 B key socket for 4G/5G mobile communication
- 1x isolated RS-485 and 2x RS232 ports
- 8V to 48V wide-range DC input with built-in ignition power control



Contact Neosys

Get Quote

Introduction

NRU-220S series is a one-stop AI NVR real-time inference and video transcoder powered by NVIDIA® Jetson AGX Orin. Its fanless design and wide-temperature operation capability makes it ideal for stationary or mobile deployment applications.

Powered by NVIDIA® Jetson AGX Orin™ 32GB/ 64GB system-on-module (SOM), it comprises an Ampere GPU with up to 2048 CUDA cores, 64 Tensor cores, 2x NVDLA 2.0 Engines that offer a total of 275 sparse TOPS (INT8) AI inference and video transcoding capability of up to twenty-two 1080P video streams simultaneously.

NRU-220S offers four 802.3at PoE+ ports sharing 1 Gigabit bandwidth; each port can supply up to 25.5W of power to IP cameras. The additional two 2.5GbE ports is ideal for surveillance applications requiring more IP camera connections, or higher bandwidth connections to the backend. In addition to 64GB eMMC on the Orin module and an M.2 2280 NVMe socket for fast SSD read/write, NRU-220S is equipped with two front-accessible 2.5" SSD trays for storage expansion. It also has two mini-PCIe sockets for CAN/ COM/ WiFi modules and one M.2 B key socket for 4G LTE/5G NR mobile communications.

In addition to the above mentioned connectivity, the system also includes a wide range of NVIDIA AI tools, and modern deep learning frameworks. NRU-220S brings real-time video inference to the edge for surveillance, predictive maintenance, and intelligent transportation system (ITS) applications. Furthermore, with Neosys' unique damping bracket design, ignition power control, and 8-48V wide-range DC power input, NRU-220S is also ideal for in-vehicle deployment. Last but not least, NRU-220S comes with a derivative model, NRU-222S, incorporating M12 connectors for applications in shock and vibration environments that require extreme rugged connections, such as for agriculture, construction, and mining machinery.

NRU-220S series is Neosys' response to edge AI performance demands in a compact form factor with fanless wide-temperature operation.

Specifications

	NRU-220S	NRU-222S
System Core		
Processor	Supporting NVIDIA® Jetson AGX Orin™ System-on-Module (SOM), comprising NVIDIA® Ampere GPU and Arm Cortex-A78AE CPU	
Memory	32GB/ 64GB LPDDR5 (AGX Orin 32GB/ 64GB) @ 3200 MHz on SOM	
eMMC	64GB eMMC 5.1 on SOM	
Panel I/O Interface		
Ethernet Port	6x RJ45 with screw-lock	6x M12 X-coded 8-pin
PoE Capability	Port 1, Port 2: 2.5 Gigabit Ethernet ports by Intel® I225 Port 3 ~ Port 6: Gigabit ports, share 1 Gbps total bandwidth	
USB	1x USB 3.2 Gen2 port 2x USB 2.0 ports 1x USB Type C (Debug Only)	
Video Port	1x DisplayPort, supporting 3840x2160 at 60Hz	
Serial Port	1x Isolated RS-485 port and 2x RS-232 ports	
CAN bus	2x CAN 2.0 ports	
Isolated DIO	4-CH isolated DI and 4-CH isolated DO	
Internal I/O Interface		
Mini PCI Express	1x full-size mini PCI Express socket (PCIe + USB 2.0) for WiFi 6 or CAN 1x full-size mini PCI Express socket (USB 2.0) for GNSS or 4G LTE	
M.2	1x M.2 3042/3052 B key (USB 3.1 Gen 1 + USB 2.0) for LTE/5G module with dual micro SIM support	
Storage		
SATA HDD	2x front-accessible 2.5" 7mm SSD	
M.2 NVMe	1x M.2 2280 M key NVMe socket (PCIe Gen4x4) for NVMe SSD	
Power Supply		
DC Input	1x 3-pin pluggable terminal block for 8V to 48V DC input and ignition power control (IGN/ GND/ V+)	1x M12 A-coded 5-pin for 8V to 48V DC input and ignition power control (IGN/ GND/ V+)*
Mechanical		
System LED	PWR: System carrier board power status OS: Jetson OS boot status IGN: Ignition power signal	
Dimension	230 mm (W) x 173 mm (D) x 66 mm (H)	
Weight	2.6 kg (excluding the damping bracket)	
Mounting	Wall-mount with the damping bracket	
Environmental		
Operating Temperature	-25°C ~ 70°C with passive cooling (30W TDP mode) **	
Storage Temperature	-40°C ~ 85°C	
Humidity	10% ~ 90%, non-condensing	
Vibration	Operating, MIL-STD-810H, Method 514.8, Category 4	IEC61373:2010, Category 1, Class B Body Mounted (part of EN 50155)
Shock	Operating, MIL-STD-810H, Method 516.8, Procedure I	IEC61373:2010, Category 1, Class B Body Mounted (part of EN 50155)
EMC	CE/ FCC Class A, according to EN 55032 & EN 55035 EN 50121-3 (EN 50155:2017, Clause 13.4.8)	CE/ FCC Class A, according to EN 55032 & EN 55035 EN 50121-3 (EN 50155:2017, Clause 13.4.8)

* Due to the M12 DC input current limit, the allowable DC input range of the NRU-222S varies based on the system load: System load under 60W, the required DC input range is 8V to 48V
System load 60W ~ 100W, the required DC input range is 8V to 48V
System load 100W ~ 120W, the required DC input range is 8V to 48V
System load 120W ~ 150W, the required DC input range is 8V to 48V
System load 150W ~ 180W, the required DC input range is 8V to 48V
System load 180W ~ 200W, the required DC input range is 8V to 48V
System load 200W ~ 220W, the required DC input range is 8V to 48V
System load 220W ~ 240W, the required DC input range is 8V to 48V
System load 240W ~ 260W, the required DC input range is 8V to 48V
System load 260W ~ 280W, the required DC input range is 8V to 48V
System load 280W ~ 300W, the required DC input range is 8V to 48V
System load 300W ~ 320W, the required DC input range is 8V to 48V
System load 320W ~ 340W, the required DC input range is 8V to 48V
System load 340W ~ 360W, the required DC input range is 8V to 48V
System load 360W ~ 380W, the required DC input range is 8V to 48V
System load 380W ~ 400W, the required DC input range is 8V to 48V
System load 400W ~ 420W, the required DC input range is 8V to 48V
System load 420W ~ 440W, the required DC input range is 8V to 48V
System load 440W ~ 460W, the required DC input range is 8V to 48V
System load 460W ~ 480W, the required DC input range is 8V to 48V
System load 480W ~ 500W, the required DC input range is 8V to 48V
System load 500W ~ 520W, the required DC input range is 8V to 48V
System load 520W ~ 540W, the required DC input range is 8V to 48V
System load 540W ~ 560W, the required DC input range is 8V to 48V
System load 560W ~ 580W, the required DC input range is 8V to 48V
System load 580W ~ 600W, the required DC input range is 8V to 48V
System load 600W ~ 620W, the required DC input range is 8V to 48V
System load 620W ~ 640W, the required DC input range is 8V to 48V
System load 640W ~ 660W, the required DC input range is 8V to 48V
System load 660W ~ 680W, the required DC input range is 8V to 48V
System load 680W ~ 700W, the required DC input range is 8V to 48V
System load 700W ~ 720W, the required DC input range is 8V to 48V
System load 720W ~ 740W, the required DC input range is 8V to 48V
System load 740W ~ 760W, the required DC input range is 8V to 48V
System load 760W ~ 780W, the required DC input range is 8V to 48V
System load 780W ~ 800W, the required DC input range is 8V to 48V
System load 800W ~ 820W, the required DC input range is 8V to 48V
System load 820W ~ 840W, the required DC input range is 8V to 48V
System load 840W ~ 860W, the required DC input range is 8V to 48V
System load 860W ~ 880W, the required DC input range is 8V to 48V
System load 880W ~ 900W, the required DC input range is 8V to 48V
System load 900W ~ 920W, the required DC input range is 8V to 48V
System load 920W ~ 940W, the required DC input range is 8V to 48V
System load 940W ~ 960W, the required DC input range is 8V to 48V
System load 960W ~ 980W, the required DC input range is 8V to 48V
System load 980W ~ 1000W, the required DC input range is 8V to 48V

* Due to the M12 DC input current limit, the allowable DC input range of the NRU-222S varies based on the system load: System load under 60W, the required DC input range is 8V to 48V
System load between 60W to 160W, the required DC input range is 20V to 48V
** For sub-zero and over 60°C operating temperature, a wide temperature HDD or Solid State Disk (SSD) is required.

All rights reserved. Copyright© 2023 Neosys Technology Inc.


Last updated: 15 - Sep 2023

NRU-220S/ NRU-222S Series




Appearance

NRU-220S

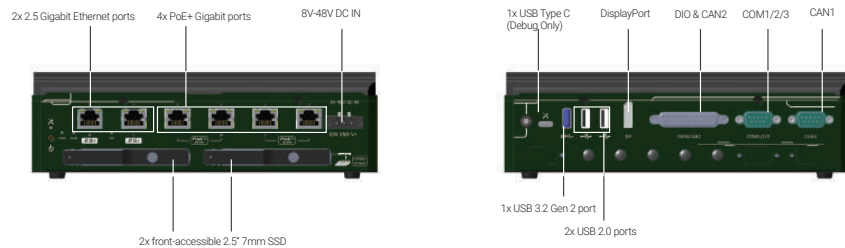

Dimensions

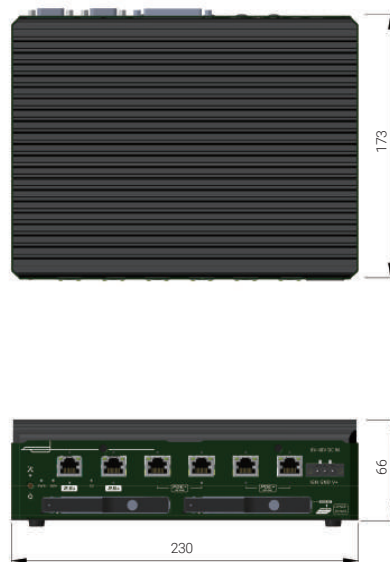

Ordering Information

Model No.	Product Description
NRU-220S-JAO32	NVIDIA® Jetson AGX Orin™ (32GB) AI NVR for Intelligent Video Analytics with RJ45 Ethernet
NRU-220S-JAO64	NVIDIA® Jetson AGX Orin™ (64GB) AI NVR for Intelligent Video Analytics with RJ45 Ethernet

Optional Accessories


PA-160W-OW	160W AC-DC power adapter 20V/8A; 18AWG/120cm; cord end terminals for terminal block, operating temperature: -30 to 70°C.
PA-120W-OW	120W AC/DC power adapter 20V/6A; 18AWG/120cm; cord end terminals for terminal block, operating temperature: -30 to 70°C.
AccsyBx-FAN-NRU-100	Fan kit with 92mm x 92mm fan for NRU-220S series

All specifications and photos are subject to change without prior notice


NRU-220S/ NRU-222S Series

Appearance

NRU-222S

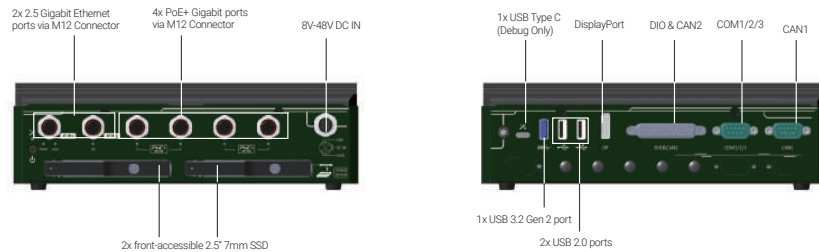

Dimensions

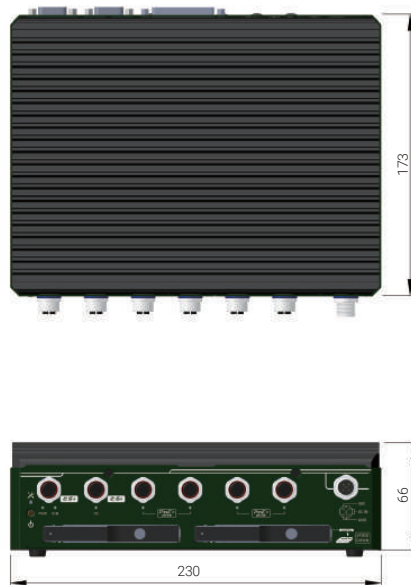

Unit : mm

Ordering Information

Model No.	Product Description
NRU-222S-JA032	NVIDIA® Jetson AGX Orin™ (32GB) AI NVR for Intelligent Video Analytics with M12 Ethernet
NRU-222S-JA064	NVIDIA® Jetson AGX Orin™ (64GB) AI NVR for Intelligent Video Analytics with M12 Ethernet

Optional Accessories

PA-160W-OW	160W AC-DC power adapter 20V/8A; 18AWG/120cm; cord end terminals for terminal block, operating temperature: -30 to 70°C.
PA-120W-OW	120W AC/DC power adapter 20V/6A; 18AWG/120cm; cord end terminals for terminal block, operating temperature: -30 to 70°C.
AccsyBx-FAN-NRU-100	Fan kit with 92mm x 92mm fan for NRU-220S series

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660