

VPP6N0-S NX OOB MK.2

OOB Connection via Wifi / 4G / RJ45

YUAN
Visualize Intelligent Planet

Features

- Powered by NVIDIA® Jetson Orin™ NX Super up to 157 TOPS
- OOB Connection via Wifi / 4G / RJ45
- 3xM.2 M Key, Gen 4x4 / Gen 4x2 / Gen 4x1
- Fanless Design
- 4xUSB3.2 Gen2
- RS232 / RS485 / I2C

AIIXON



Specifications

System		
CPU	NVIDIA Jetson Orin™ NX 8GB Super 6-Core Arm® Cortex®-A78AE v8.2 64-Bit CPU 1.5MB L2 + 4MB L3	NVIDIA Jetson Orin™ NX 16GB Super 8-Core Arm® Cortex®-A78AE v8.2 64-Bit CPU 2MB L2 + 4MB L3
GPU	1024-Core NVIDIA Ampere Architecture GPU with 32 Tensor Cores	
AI Performance	NVIDIA Jetson Orin™ NX 8GB 117 TOPS	NVIDIA Jetson Orin™ NX 16GB 157 TOPS
System Memory	NVIDIA Jetson Orin™ NX 8GB 8GB LPDDR5	NVIDIA Jetson Orin™ NX 16GB 16GB LPDDR5
Interface		
Storage	Supports External NVMe	
Display Interface	2xHDMI2.0	
Ethernet	1xRJ45 for 10/100/1000 Mbps Ethernet DHCP Client	
Expansion Slot	M.2 1xM.2 2280/3080 M Key PCIe Gen4x4 Slot 1xM.2 2280 M Key PCIe Gen4x2 Slot 1xM.2 2280 M Key PCIe Gen4x1 Slot 1xM.2 3042/3052 M Key USB3.2 Gen1 Slot (On Optional 5G Daughter Board)	
USB	4xUSB3.2 Gen2 (Type-A) 1xUSB3.2 Gen1 (Pin Header) 1xUSB3.2 Gen2 (Type-C, Device Mode Support) (**) **: Hardware Version 1.5 Supported	
MIPI	2x4MIPI CSI-2 Lanes (D-PHY 2.1, Support MIPI Camera, Capture Card)	
Audio	1xLine In (3.5mm or Pin Header) 1xLine Out (3.5mm or Pin Header)	
Perherial Communication	1xRS232 (Phoenix Connector or Pin Header) 1xRS485 (Phoenix Connector or Pin Header) 4xGPIO (Pin Header) 3xI2C (Pin Header)	
Misc. Features	Firmware Upgradable AutoPower (Pin Header)	

OOB Specifications

Out-Of-Band Management Functions	
Allxon swiftDR for Power Cycling	Edge Device Force Shutdown Edge Device Power Switch ON/OFF Edge Device Power ON/OFF Detection Edge Device Reset
Extension I/O	1x USB 2.0 1x I2C 1x UART 2x GPIO 1x 3.3Vdc
Out-Of-Band Management Network Interface	
Ethernet	1-port 10/100 Mbps RJ45 Port
Wireless	Support 4G LTE Module with SIM Card Slot & Wi-Fi USB Dongle

Remote Management Enrollment

VPP6N0-S NX OOB MK.2 supports Allxon's remote edge AI device management solutions to assist users in overcoming the challenges encountered during the AI/IoT projects. To get started with Allxon's various solutions, follow the instructions with the web page below to activate different Allxon services according to your needs.



OOB Management
Introduction



Getting Start with
Remote Management


COPYRIGHT©2023 YUAN High-Tech Development Co., Ltd.

Add-On Cards / SDK / Software


Video Feature				
Capture Card (Optional)	Model	Interface	Max. Resolution	Capture / Preview
	SC750N1 M2 HDMI2.1	1×HDMI2.1	4096×2160p@60/50fps (4:4:4 / 10Bit)	4:2:2 10Bit P210 4:2:0 10Bit P010 4:4:4 8Bit YV24 4:4:4 8Bit RGB32 / 24 4:2:2 8Bit YUY2 4:2:0 8Bit YV12, NV12
	SC710N1 M2 HDMI2.0	1×HDMI2.0	4096×2160p@60/50fps	
	SC710N1 M2 12G-SDI	1×12G-SDI, 1×Quad-Link 3G-SDI	4096×2160p@60/50fps	
	SC400N4 M2 TVI / AHD	4×TVI / AHD	1920×1080p@30/25fps	
	SC400N4 M2 HDMI	4×HDMI	1920×1080p@60/50fps	
	SC400N4 M2 SDI	4×3G-SDI	1920×1080p@60/50fps	
	SC400N1 M2 HDV	1×DVI-I, 1×YPbPr, 1×VGA	1920×1080p@60/50fps	
Video Encode	AV1 (UHP) 1×4K60 3×4K30 6×1080p60 12×1080p30			
	H.265 (UHP) 1×4K60 3×4K30 6×1080p60 12×1080p30			
	H.264 (UHP) 1×4K60 2×4K30 5×1080p60 11×1080p30			
	AV1 (Main Profile) 1×8K30 2×4K60 4×4K30 9×1080p60 20×1080p30			
	H.265 (Main, Main10) 1×8K30 2×4K60 4×4K30 9×1080p60 18×1080p30			
	H.264 (Baseline, Main, High) 1×4K60 2×4K30 5×1080p60 11×1080p30			
	VP9 (Profile 0, Profile 2) 1×4K60 3×4K30 7×1080p60 15×1080p30			
SDK				
QCAP	Capture High Performance Renderer Image Snapshot Deinterlace, Alpha Blending Engine Auto Signal Detection 2D/3D Video, Audio and VANC Streams Capture			
	Record Encrypt / Sync / Clone / Recording Time-Shifting / Rewind / Pre-Event / Recording Multi-Streams (3D) Recording Animation Transition Effect Video Cropping, Scaling and Alpha Blending Engine			
	Stream 2D/3D Universal Stream Client 2D/3D Multi-Streams Stream Server RTSP, RTMP, HLS, SRT, TS, WebRTC., Full NDI (*), NDI-HX (*), Dante AV-H (*) Animation Transition Effect Video Cropping, Scaling and Alpha Blending Engine *Separate License Required			
QDEEP	AI SDK Integrated Multiple Algorithms and Deep-Learning Models in Various Fields of Applications Face Recognition Objects Detection Objects Segment Optical Character Recognition License Plate Recognition Customizable Video AI Functions Upon Request			



SC750N1 M2 HDMI2.1



SC710N1 M2 HDMI2.0



SC710N1 M2 12G-SDI



SC400N4 M2 TVI / AHD




SC400N4 M2 HDMI



SC400N4 M2 SDI



SC400N1 M2 HDV

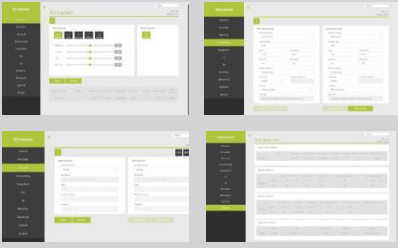Software (Optional)		
Stream Catcher Pro	Capture Auto Signal Detection Deinterlace, OSD, Color Adjustment Image Snapshot Animation Transform Effect for PGM	
	Record AV1, H.26X MP4, TS Multi-Stream Recording Schedule Recording	
	Stream Multi-Streams Stream Server RTSP, RTMP, HLS, SRT, TS, WebRTC., Full NDI (*), NDI-HX (*), Dante AV-H (*) *Separate License Required	
Xtreamer	Web Based User Interface	
	Encode / Decode AV1, H.26X	
	Color Format Adjust 444 / 422 / 420, 10Bit / 8Bit Select	
	Record MP4, TS Stream / Network RTSP, RTMP, HLS, SRT, TS, WebRTC., Full NDI (*), NDI-HX (*), Dante AV-H (*) *Separate License Required	

Environment


Development Environment	
JetPack	6.2 or Higher
Environment	
Power Supply	DC input : 12~36V
Power Consumption	TBA
Operating Temperature	Standard Version: 0~60 °C with Airflow
Storage Temperature	-20~80 °C

Mechanical


- Dimension of case: TBA
- Dimension of main Board: 140mm×90mm
- Weight: TBA

I/O Layout


- Case

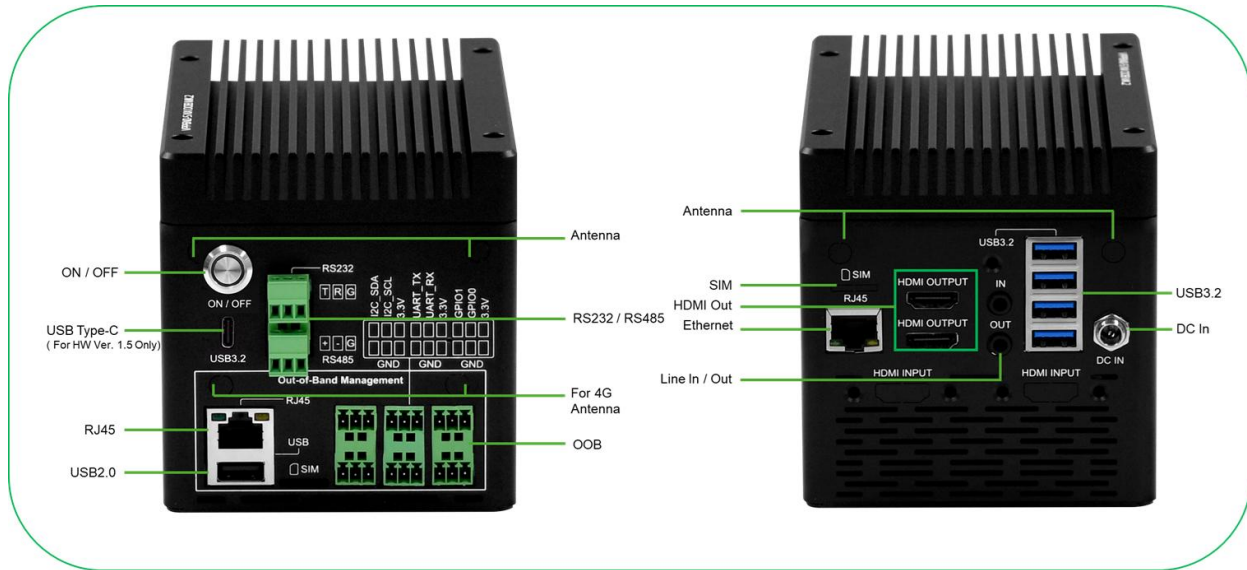

• OOB Daughter Board

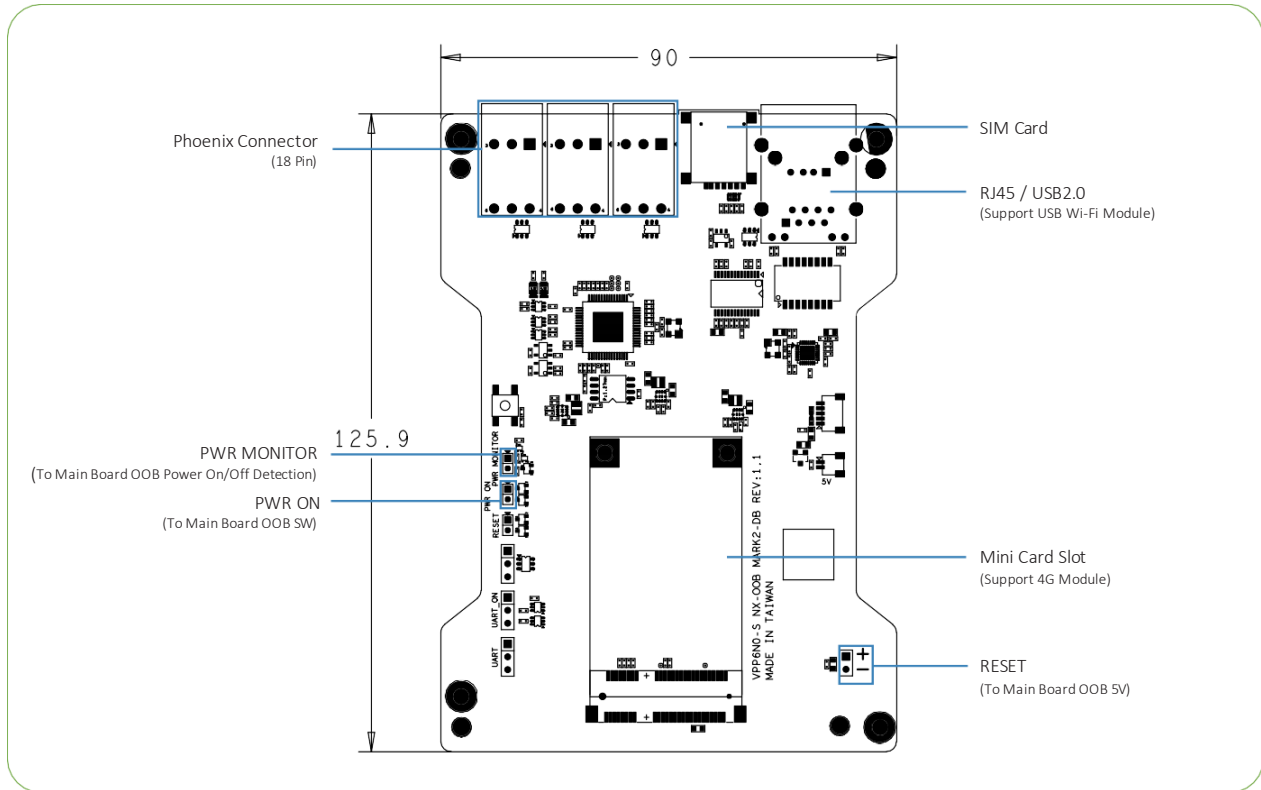

• 5G Daughter Board

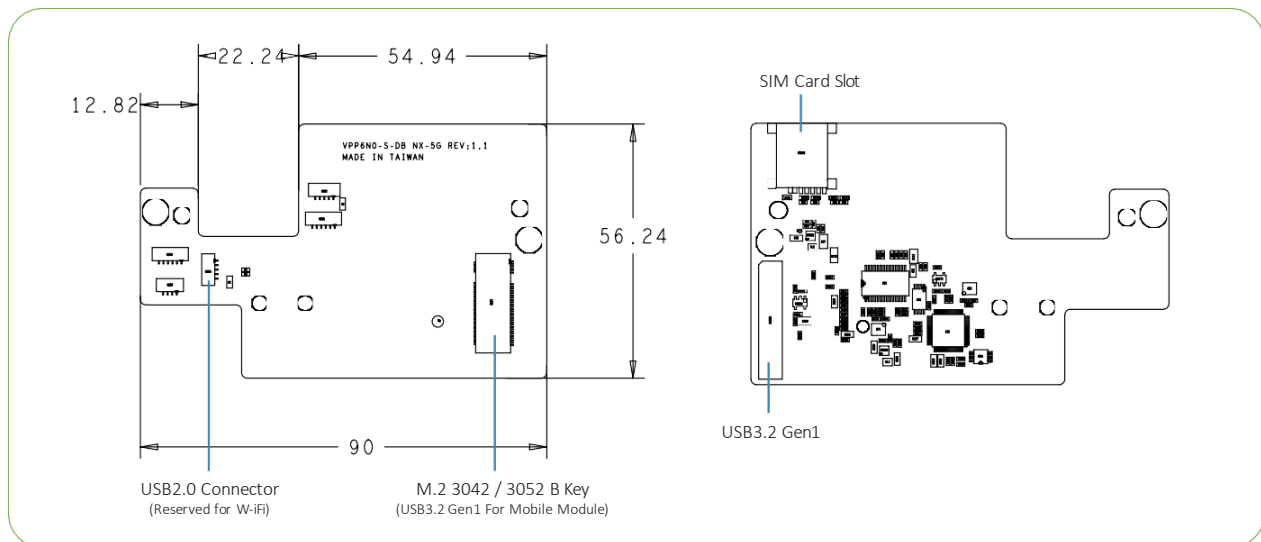

* All registered trademarks are the property of their owners. The photo is for reference only.

* Technology License Patent Royalty. Supplier (YUAN Technology Ltd.) as an OEM vendor is not responsible for any royalties applied to the Models and collected by any patent or trade mark holders or his exclusive, non-exclusive.

Licensees or representatives such as MPEGLA, Dolby, Thomson, Sisvel, H.264, MPEG4 and any other natural or legal person. All concerning royalties of patents and trade marks will be paid or negotiated with the above mentioned owner by you. In case of any patent or trademark infringement you are responsible for all necessary processes and costs. You accept and acknowledge that all prices of Models offered by supplier are exclusive of any royalties, charges or license fees for any patents in any countries or areas.

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660