

Machine Vision



Nuvis-534RT Series

AMD Ryzen™ V1000 Ultra-compact Vision Controller with Vision-specific I/O and real-time control



CE FC

Key Features

- AMD Ryzen™ Embedded V1807B quad-core 45W CPU
- Integrated vision-specific I/O
 - 4-CH CC/ CV lighting controller
 - 4-CH camera trigger outputs
 - 1-CH quadrature encoder input
 - 8-CH isolated DI and 8-CH isolated DO
- Patented MCU-based, real-time I/O control by DTIO V2* and NuMCU
- Built-in camera interfaces
 - Four Gigabit PoE+ ports with screw-lock
 - Four USB 3.0 ports with screw-lock
- M.2 2280 M key NVMe (Gen3 x2) socket for fast storage access

[Contact Neosys](#)

[Get Quote](#)

*R.O.C Patent No. I526834

Introduction

Nuvis-534RT is a high-performance, ultra-compact vision controller with integrated camera interfaces, vision-specific I/Os and real-time control for machine vision applications. Powered by AMD Ryzen™ Embedded V1807B 4-core/ 8-thread processor, it provides superb performances equivalent to mainstream desktop CPUs while retaining a compact 8.2 cm x 11.8 cm x 17.6 cm (3.4" x 4.6" x 6.9") dimensions.

Nuvis-534RT offers unique vision-oriented I/O configurations, including constant-current lighting controller to directly drive LED lights, isolated 12V trigger output to activate cameras, encoder input to acquire position information and DIO to connect to sensors/ actuators. All of the above vision-oriented I/Os can be managed by Neosys' patented DTIO V2 or NuMCU technology to guarantee real-time trigger/ response in micro-second scale. The combination of high performance and small footprint gives Nuvis-534RT a distinctive 1-2 punch advantage where the vision system can be easily deployed with USB3.0 and GigE cameras and without space restrictions.


Specifications

System Core		Storage Interface	
Processor	AMD Ryzen™ V1807B CPU (4C/ 8T, 2M Cache, 3.35/ 3.8 GHz, 35W - 54W TDP)	M.2	1x M.2 2280 M key NVMe socket (PCIe Gen3 x2) for NVMe SSD
Graphics	Vega GPU with 11 compute units	Power Supply	
Memory	Up to 16 GB DDR4-3200 SDRAM by one SODIMM sockets	DC Input	1x 3-pin pluggable terminal block for 8~35VDC DC input
Vision-Specific I/O Interface		Remote Ctrl. & Status Output	1x 3-pin pluggable terminal block for remote control and PWR LED output
LED Lighting Controller	4-CH LED lighting controller output, supporting - Constant current mode (up to 2 A per channel, 100 kHz dimming control) - Constant voltage mode (24 VDC, 100 kHz dimming control)	Mechanical	
Camera Trigger	4-CH camera trigger output (12 VDC output)	Dimension	82 mm (W) x 118 mm (D) x 176 mm (H)
Encoder Input	1-CH quadrature encoder input (A/ B/ Z)	Weight	1.5 kg
Isolated Digital Output	4-CH isolated high-speed DO (<2 us transient time, for strobe/PWM) 4-CH isolated high-current DO (up to 500 mA rated current)	Mounting	DIN-rail mount (standard) or Wall-mount (optional)
Isolated Digital Input	8-CH isolated high-speed digital input (<2 us transient time)	Fan	External-accessible 80mm x 80mm fan for system heat dissipation
Real-time I/O Control	Patented MCU-based real-time I/O control with DTIO V2 or NuMCU firmware	Environmental	
General I/O Interface		Operating Temperature	-25°C ~ 70°C **
Ethernet port	4x Gigabit Ethernet ports by Intel® I350-AM4 controller	Storage Temperature	-40°C ~ 85°C
PoE+	IEEE 802.3at PoE+ PSE, 80 W total power budget	Humidity	10%~90%, non-condensing
USB	4x USB 3.1 Gen1 (5 Gbps) ports	Vibration	Operating, MIL-STD-810G, Method 514.6, Category 4
Video Port	1x VGA connector, supporting 1920 x 1200 resolution 1x DP connector, supporting 4k2k resolution	Shock	Operating, MIL-STD-810G, Method 516.6, Procedure I, Table 516.6-II
Serial Port	1x Software-programmable RS-232/422/485 ports (COM1) 3x 3-wire RS-232 ports (COM2/3/4) or 1x RS-422/485 port (COM2)	EMC	CE/FCC Class A, according to EN 55032 & EN 55024
Audio	1x 3.5 mm jack for mic-in and speaker-out	* For sub-zero and over 60°C operating temperature, a wide temperature HDD or Solid State Disk (SSD) is required. ** Operating temperature is up to 70°C only if external-accessible fan is installed.	


Nuvis-534RT Series



Appearance

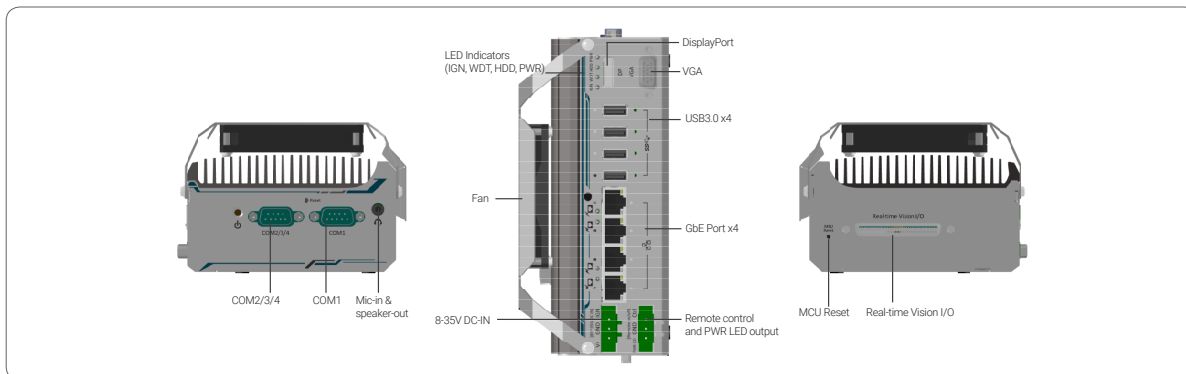

Dimensions

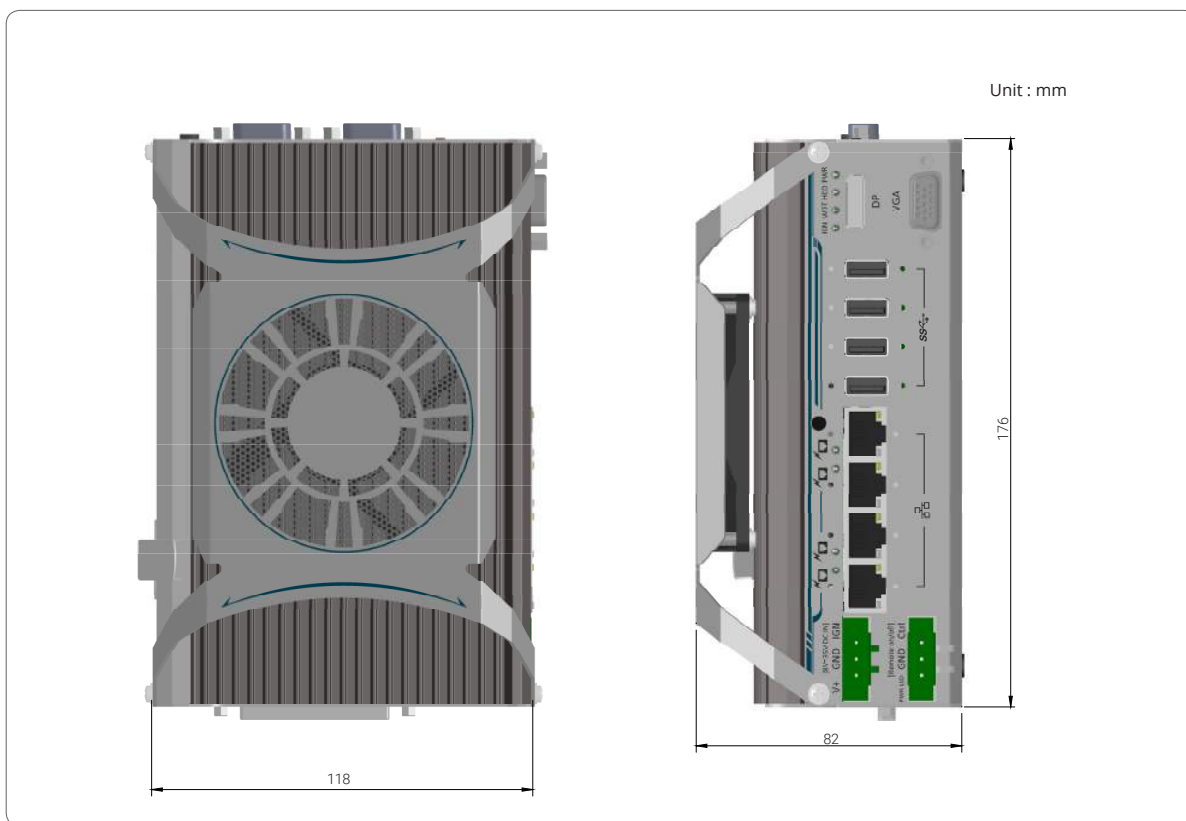

Ordering Information

Model No.	Product Description
Nuvis-534RT-DTIO	AMD Ryzen™ V1807B ultra-compact vision controller with vision-specific I/O and real-time control by DTIO
Nuvis-534RT-NuMCU	AMD Ryzen™ V1807B ultra-compact vision controller with vision-specific I/O and real-time control by NuMCU

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660