


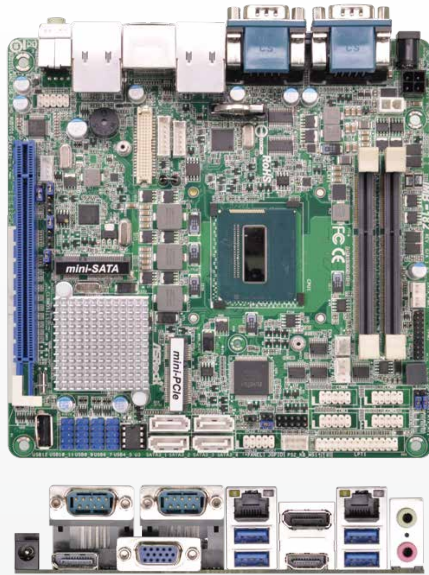

IMB-182

Mini-ITX Motherboard

Spotlight Features

- BGA type for Intel Core i7/i5/i3/mobile processor (Haswell)
- Intel® QM87 Chipset
- Integrated Intel® HD Graphics Built-in Visuals
- Supports DDR3 1600MHz, 2x SO-DIMM, up to 16GB system memory
- 2 x COM (RS-232/422/485), 4 x COM (RS-232)
- 1 x VGA, 1 x HDMI, 2x DisplayPort, 24 bit Dual Channel LVDS
- 4 x USB 3.0, 8 x USB 2.0, 4 x SATA3
- 1 x mini-PCIe, 1 x mSATA, 1 x PCIe (x16),
- Gigabit LAN : 1 x Intel I217LM (with v-Pro support), 1 x Intel I210
- 1 x TPM Header

Specifications

Processor System

Dimension	Mini-ITX (6.7-in x 6.7-in)
CPU	BGA type for Intel Core i7/i5/i3/mobile processor (Haswell)
Core Number	(By CPU, Max 4)
Max Speed	(By CPU)
L3 Cache	(By CPU)
Chipset	QM87
BIOS	UEFI

Expansion Slot

PCI	N/A
Mini-PCIe	1 x full size with PCIe x1 and USB2.0
mSATA	1x full size with SATA3
PCIe	1 (x16) with Riser card extend to x8+x8 or x8+x4+x4
CFast Card Socket	N/A

Memory

Technology	Dual Channel DDR3 1066/1333/1600 MHz SDRAM
Max.	16GB
Socket	2 x SO-DIMM

Graphics

Controller	Intel HD Graphics (By CPU)
VRAM	Shared Memory
VGA	Supports max resolution 2048 x 1536
LVDS	1
HDMI	Supports HDMI 1.4a, max resolution 1920 x 1200
DVI	No
Display Port	Supports max resolution 2560 x 1 600
Multi Display	Yes (Three Display)

Ethernet

Interface	10/100/1000 Mbps
Controller	GbE LAN1: Intel I210, LAN2: Intel I217LM (with v-Pro support)
Connector	2 x RJ-45

SATA

Max Data Transfer Rate	SATA2 (3.0Gb/s), SATA3 (6.0Gb/s), Supports RAID 0/1/5/10
------------------------	--

Rear I/O

VGA	1
HDMI	1
DVI-I/D	0
Display Port	2
Ethernet	2
USB	4 x USB 3.0 compliant
Audio	2 (Mic-In, Line-Out)
Serial	2 (RS-232/422/485)
PS/2	0

Internal Connector

USB	8 (4 x USB Header 2.54mm pitch,) 1 Vertical Type A USB Connector
LVDS/Inverter	24 bit dual channel LVDS
VGA	0
Serial	4 (RS-232)
SATA	4 x SATA3 (6.0Gb/s), Support RAID 0/1/5/10
m-SATA	1
Mini-PCIe	1
Parallel	1
IrDA	0
GPIO	4 x GPI + 4 x GPO
SATA PWR Output Con	1
Speaker Header	0

Watchdog Timer

Output	Output from super I/O to drag RESETCON#
Interval	256 Segments, 0,1,2...255 Sec/Min

Power Requirements

Input PWR	DC-in 12V-19V
Power On	AT/ATX Supported AT : Directly PWR on as Power input ready ATX: Press Button to PWR on after Power input ready

Environment

Operating Temperature	0°C – 60°C
-----------------------	------------

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660