


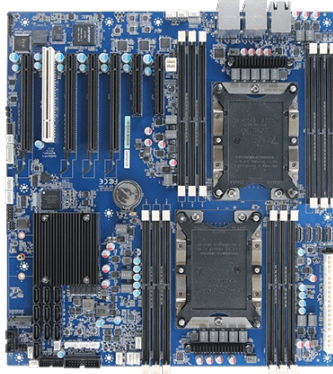

HPM-621DE

Intel® dual 2nd Gen. Xeon® Scalable Processors
EATX Server Board With Intel® C621 Chipset,
IPMI2.0

Processor supports up to 150W TDP

- > Dual Intel FCLGA3647 Sockets support 1st and 2nd Gen. Intel Xeon Scalable Processors (Max. TDP at 150W Each)
- > Intel C621 Chipset
- > 12 x DDR4 2933/ 2666/ 2400/ 2133 MHz RDIMM/ LRDIMM Up to 1.5TB
- > TPM 2.0 onboard
- > IPMI 2.0 with AST 2500 BMC controller onboard
- > 4 x Intel I210AT Giga-bit Ethernet
- > 10 x SATA III Support RAID 0,1,5,10
- > 2 x internal RS232 ports
- > 4 x USB 3.2 Gen1 ports at Edge I/O
- > 2 x internal USB 2.0 Ports
- > 2 x internal USB 3.2 Gen1 Ports
- > 1 x M.2 M-Key PCIe 3.0 x4 NVMe SSD, 2242/2260/2280 form factor
- > 12" x 13" (304.8mm x 330.2mm), PCB thickness is 2.0mm

+ Spec

System Information	
Processor	Dual Intel FCLGA3647 Sockets support 1st and 2nd Gen. Intel Xeon Scalable Processors (Max. TDP at 150W Each)
Platform Controller Hub	Intel C621 Chipset
System Memory	12 x DDR4 2933/ 2666/ 2400/ 2133 MHz RDIMM/ LRDIMM up to 1.5TB
BIOS Information	AMI UEFI BIOS
Watchdog Timer	System Reset Event. 0 ~ 6553 seconds
H/W Status Monitor	CPU temperature, Fan speed and voltage monitoring, Fan speed control, and Case Open detection
TPM	TPM 2.0 onboard
iAMT	IPMI 2.0 with AST 2500 BMC controller onboard
-Rear I/O-	
USB Port	4 x USB 3.2 Gen1 ports
RJ-45	4 x RJ45 (LAN1 share IPMI port)
-Display-	
Graphic Chipset	AST 2500 BMC controller
Resolution	1 x VGA port VGA: 1920 x 1200 @ 60Hz 32bpp
Expansion	
Expansion	4 x PCIe x16 slots, 2 x PCIe x8 slots, 1 x PCI 3.0 slot Slot 1, PCIe 3.0 x16 from CPU1 Slot 2, PCI 3.0 Slot 3, PCIe 3.0 x16 from CPU1 Slot 4, PCIe 3.0 x16 from CPU2 Slot 5, PCIe 3.0 x16 from CPU2 Slot 6, PCIe 3.0 x8 from CPU1 Slot 7, PCIe 3.0 x8 from CPU1 (Slot 7 is the slot closest to CPU)
Storage	
M.2	1 x M.2 M-Key PCIe 3.0 x4 NVMe SSD, 2242/2260/2280 form factor
I/O	
USB Port	2 x internal USB 2.0 ports 2 x internal USB 3.2 Gen1 ports
SATA	10 x SATA III Support RAID 0,1,5,10
Serial	2 x internal RS232 ports
VGA	1 x internal VGA port
CMOS Battery	1 x Horizontal Socket Type CMOS Battery Holder with CR2450
Other	4 x OCuLink ports from CPU 2 for U.2 SSD
Ethernet	
LAN Chipset	4 x Intel I210AT Giga-bit Ethernet
LAN Port	4 x RJ45 (LAN1 Share IPMI Port)
Mechanical & Environmental	
Operating Temperature	0 ~ 60°C (32 ~ 140°F)
Storage Temperature	-40 °C ~ 85 °C
Operating Humidity	40°C @95% Relative Humidity, Non-condensing
Weight	1.8Kg
Power Connector	1 x Std. 24 Pin ATX connector 2 x 8 Pin SSI 12V connector
Dimension (L x W)	12" x 13" (304.8mm x 330.2mm), PCB thickness is 2.0mm
Software Support	
OS Information	Windows 10 IOT Enterprise Windows Server 2016 Windows Server 2019
Ordering Information	
Ordering Information	HPM-621DEA-A1R EATX 2xLGA3647 Intel 1st/2nd Gen. C621 w/12xDDR4/4xPCIe16/4x1GbE/6xUSB3.1/10xSATA3.0

www.avalue.com.tw

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660