

## 58:9 Ultra Stretch for Dynamic Digital Content

### Ultra Stretch Signage 86BH5C



Ultra Stretch 86BH5C is a new signage format with a 58:9 widescreen that can display dynamic content depending on the user's installation environment. (E.g. airports, subways, banks, art galleries, or retail stores) This product is also a work of structural art in itself that can be seen as digital decor.

### Key Features

#### New Design Configuration



#### Ultra HD Resolution (3840 x 600)

Ultra HD large screens deliver an immersive viewing experience.



Conventional

86BH5C

#### 58:9 Extended Wide Format

Dynamic content is delivered on one screen since the new widescreen format is a 58:9 bar-type display.



Conventional


86BH5C

#### Multiple Screens



#### 4 Divided PBP in Landscape or Portrait

The Picture-by-Picture (PBP) feature allows you to divide a screen into four parts in landscape or portrait installations.

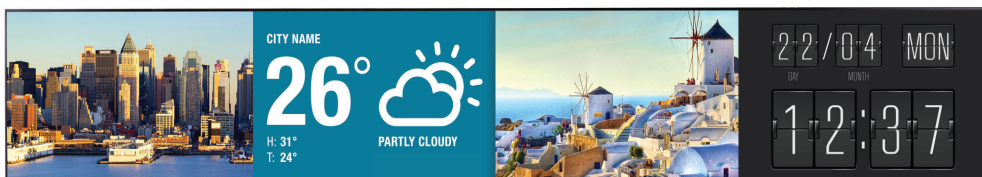

# 58:9 Ultra Stretch for Dynamic Digital Contents

## Ultra Stretch Signage 86BH5C



**Screen Size**  
86"

**86BH5C**

- Brightness : 500cd/m<sup>2</sup>
- Bezel : 4.4mm (Left/Right), 5.9mm (Top/Bottom)
- Depth : 81.7mm
- Interface : HDMI, DP, RJ45, IR, USB2.0, USB3.0, Daisy-Chain (DP Out, RS232C In/Out, RJ45)

### Other Features

#### Content Management



#### 58:9 Content Editing

With the LG SuperSign media editor, you can easily edit images or video clips of original content without any additional editing programs.



↓ Video file or Still Image



#### Multiple Content Creation

Users can edit content that consists of one video and several still images (up to 20) with SuperSign Editor.



#### Convenient Connectivity Support



#### Tiling Scene with Daisy Chain

This product supports lateral tiling for 1x4 or 4x1 installations (landscape or portrait), and up to a 4x4 installation with a daisy chain configuration.



#### LAN Daisy Chain


The LAN daisy chain allows you to control and monitor devices, distribute content, and even update firmware.




#### Easy Installation

#### Side Bracket / Classified Port

This product supports side brackets for buried installations. The classified in/out port prevents errors when connecting a daisy chain.

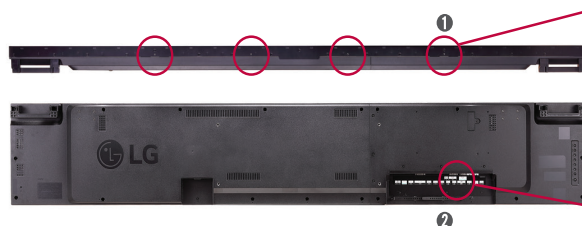

① Mounting hole for side bracket



② Classified in/out port  
- Input : White  
- Output : Green


## Specifications

BH5C		86BH5C-B
PANEL	Screen Size	86" class (85.6") diagonal
	Panel Technology	IPS
	Aspect Ratio	58.9
	Native Resolution	3,840 x 600 (UHD)
	Brightness	Typ: 500cd/m <sup>2</sup> , Min : 400cd/m <sup>2</sup>
	Contrast Ratio	1,100:1(Typ)
	Dynamic Contrast Ratio:	(Typ) 500,000:1
	Viewing Angle(H x V)	178 x 178
	Response Time	8ms (G to G BW) typ.
	Surface Treatment	AGP (10% Haze)
	Life time	50,000 Hrs
CONNECTIVITY	Orientation	Landscape / Portrait
	Input	HDMI(3), DP, OPS, DVI-D, USB2.0, USB3.0, SD Card
	Output	Analog Audio
PHYSICAL SPECIFICATION	External Control	RS232C, RJ45, IR+B Receiver, Pixel Sensor, Analog Audio
	Bezel Color	Black
	Bezel Width	4.4mm (L/R), 5.9mm (T/B)
	Monitor Dimension (W x H x D)	85" x 13.7" x 3.2"
	Weight (Head)	45.2lbs
	Carton Dimensions (W x H x D)	90.2" x 9" x 18.9"
	Packed Weight	78lbs
SPECIAL FEATURES	VESA™ Standard Mount Interface	600mm x 200mm
		Temperature Sensor, Auto Brightness Sensor, Tile Mode, Natural Mode@Tile Mode, ISM Method, Energy Saving, Smart Energy Saving, File Play with USB/SD/Internal Memory, PIP/PBP, 8GB (System 4GB + Available 4GB), Wi-Fi Dongle Ready, 4K Up Scaling
ENVIRONMENT CONDITIONS	Operation Temperature Range	32 °F to 104 °F
	Operation Humidity Range	10 % to 80 %
POWER	Power Supply	100-240V~, 50/60Hz
	Power Type	Built-In Power
	Power Typ. / Max.	180W/220W
	Consumption Smart Energy Saving	30% of typical
STANDARD (CERTIFICATION)	Safety	UL / cUL / CB / TUV / KC
	EMC	FCC Class "A" / CE / KC
	ErP / Energy Star	NA / NA
MEDIA PLAYER COMPATIBILITY	OPS type compatible	Yes
	External Media player Attachable	No
SOFTWARE COMPATIBILITY	SuperSign W/Lite	Yes
	SuperSign C	Yes
ACCESSORY	Basic	Remote Controller (2ea Batteries included), Power Cord, DP (3M), RS-232C Cable (3M) Owner's Manual (Website upload)
	Optional	AN-WF500 (WiFi USB Dongle), MP700, KT-OPSA (OPS KIT), KT-SP0 (RGB Sensor) ** Stand is not available
OTHER	UPC	7 19192 19990 3
WARRANTY		3-Year Limited Warranty (Parts and Labor)   Extended Warranties Available

## Dimension (unit : mm)


86"

85" x 13.7" x 3.2" / 45.2lbs

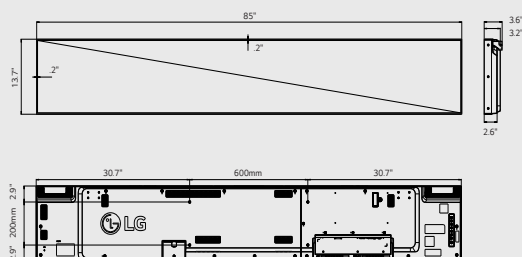

## Connectivity

- ① AUDIO IN/OUT
- ② DP OUT
- ③ DP IN
- ④ DVI-D IN
- ⑤ HDMI IN
- ⑥ USB
- ⑦ SD Card
- ⑧ LAN IN
- ⑨ LAN OUT
- ⑩ PIXEL SENSOR
- ⑪ IR & LIGHT SENSOR
- ⑫ RS-232C IN
- ⑬ RS-232C OUT

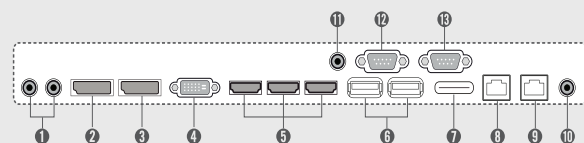


**HDMI™**  
HIGH DEFINITION MULTIMEDIA INTERFACE



Download LG Commercial Display Mobile App



More info [www.lgecommercial.com](http://www.lgecommercial.com)

**You**  [youtube.com/c/LGCommercialDisplay](https://youtube.com/c/LGCommercialDisplay)

LG may make changes to specifications and product descriptions without notice.  
Copyright © 2015 LG Electronics Inc. All rights reserved. "LG Life's Good" is a registered of LG Corp.  
The names of products and brands mentioned here may be the trademarks of their respective owners.  
LG\_SPEC\_86BH5C\_061675\_PR

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660