


SBC-261

3.5" SBC Motherboard

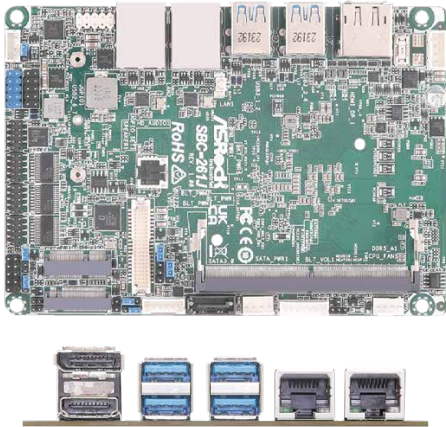

KEY FEATURES

- Intel® Alder Lake-N SoC Processors
- 1 x 262-pin SO-DIMM DDR5 4800 MHz, up to 32GB
- 4 x USB3.2 Gen2, 2 x USB2.0, 1 x M.2 Key E, 1 x M.2 Key M, 4 x COM, 1 x SATA3
- 2 x Realtek 1 Gigabit LAN
- Supports Triple display, 1 x HDMI 2.0b, 1 x DP 1.4b, 1 x LVDS or eDP
- 12V DC-In

SPECIFICATIONS

Form Factor

Dimensions	3.5" SBC (5.8-in x 4-in x 1-in, 14.7 cm x 10.2 cm x 2.6cm)
------------	--

Processor System

CPU	Intel® Alder Lake-N Processors SBC-261J (N97, QC, Max Speed Up to 3.6 GHz, 12W) *For other CPU SKUs request, please contact regional Sales for availability
BIOS	AMI SPI 256 Mbit

Memory

Technology	Single Channel DDR5 4800 MHz
Capacity	32 GB
Socket	1 x 262-pin SO-DIMM

Graphics

Controller	Intel® UHD Graphics
HDMI	HDMI 2.0b Max resolution up to 4096 x 2160@60Hz
DisplayPort	DP 1.4a Max resolution up to 4096 x 2160@60Hz
LVDS	Dual channel 24 bit up to 1920 x 1200@60Hz (Connector shared with eDP)
eDP	Max resolution up to 1920 x 1080@60Hz (Connector shared with LVDS)
MultiDisplay	Triple display

Expansion Slot

M.2	1 x M.2 (Key E, 2230) with PCIe x1, USB 2.0 and CNVi for Wireless
-----	---

Audio

Interface	Realtek ALC256 HD, High Definition Audio.
-----------	---

Ethernet

Controller/ Speed	LAN1: Realtek RTL8111H with 10/100/1000 Mbps LAN2: Realtek RTL8111H with 10/100/1000 Mbps
Connector	2 x RJ-45

Rear I/O

HDMI	1 x HDMI 2.0b
DisplayPort	1 x DP 1.4b
Ethernet	2 x 1 Gigabit LAN
USB	4 x USB 3.2 Gen2

Internal Connector

USB	2 x USB 2.0 (1 x 2.54 pitch header)
COM	COM1 (RS-232/422/485) COM2, COM3, COM4 (RS232)
GPIO	4 x GPI, 4 x GPO
LVDS	1 (Connector with LVDS/eDP signal, switch by BIOS)
SATA PWR Output	1
Speaker Header	1

Storage

M.2	1 x M.2 (Key M, 2242/2260/2280) with PCIe x1 or SATA3 and USB 2.0 for SSD
SATA	1 x SATA3 (6Gb/s)

Security

TPM	Intel® PTT
-----	------------

Watchdog Timer

Output Interval	From Super I/O to drag RESETCON# 256 Segments, 0, 1, 2, ...255sec
-----------------	--

Power Requirements

Input PWR	12V DC-In
Power On	AT/ATX Supported - AT : Directly PWR on as power input ready - ATX : Press button to PWR on after power input ready

Environment

Operating Temp	-20°C ~ 70°C
Storage Temp	-40° C ~ 85° C
Operating Humidity	5% ~ 90%
Storage Humidity	5% ~ 90%

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660