



6.5" VGA Industrial Open Frame Monitor



Features

- 6.5" VGA LCD panel with LED backlight for 20% power saving and environmental protection
- 0° C ~ +50° C range operating temperature
- 4-wire resistive touchscreen solution
- USB touch interface
- Dual signal interface with VGA & DVI
- Integrated bracket for easy installation
- Versatile mounting method for rear mounting and VESA mounting
- Anti-reflective treatment for sunlight readable enhancement (optional)



Introduction


The Advantech IDS-3106 Embedded Open Frame Monitor series offers flexible options for LCD, touchscreen, signal interface and chassis mounting. The series supports rear and VESA mounting. The integrated brackets bring the benefits of easy installation and provide flexibility for different applications.

Specifications

Model IDS-3106 Size 6.5" LED panel Resolution 640 x 480 (VGA) Viewing Angle 80°/80° (H), 70°/70° (V) Brightness 800 (cd/m²) Color Support 16.2M/262K colors Contrast Ratio 600:1 Response Time 25 [msec] Backlight Life (hrs) 50,000 hrs T/S Type 4-Wire Resistive Touch Screen Surface Hardness 3H Durability 1 million touches Transparency 80% ± 3% Operating Temperature 0~50° C (32 ~ 122° F) Storage Temperature -20~60° C (-4~ 140° F) Environment Hursidity 5,069° @ 100° C page geodesigns Tansparency Hursidity 5,069° @ 100° C page geodesigns	•		
Resolution 640 x 480 (VGA) Viewing Angle 80°/80° (H), 70°/70° (V) Display Brightness 800 (cd/m²) Color Support 16.2M/262K colors Contrast Ratio 600:1 Response Time 25 [msec] Backlight Life (hrs) 50,000 hrs T/S Type 4-Wire Resistive Touch Screen Surface Hardness 3H Durability 1 million touches Transparency 80% ± 3% Operating Temperature 0~50° C (32 ~ 122° F) Storage Temperature -20 ~ 60° C (-4 ~ 140° F)		Model	IDS-3106
Display Viewing Angle 80°/80° (H), 70°/70° (V) Brightness 800 (cd/m²) Color Support 16.2M/262K colors Contrast Ratio 600:1 Response Time 25 [msec] Backlight Life (hrs) 50,000 hrs Touchscreen T/S Type 4-Wire Resistive Touch Screen Surface Hardness 3H Durability 1 million touches Transparency 80% ± 3% Operating Temperature 0 - 50° C (32 ~ 122° F) Storage Temperature -20 ~ 60° C (-4 ~ 140° F)		Size	6.5" LED panel
Display Brightness 800 (cd/m²) Color Support 16.2M/262K colors Contrast Ratio 600:1 Response Time 25 [msec] Backlight Life (hrs) 50,000 hrs T/S Type 4-Wire Resistive Touch Screen Surface Hardness 3H Durability 1 million touches Transparency 80% ± 3% Operating Temperature 0 - 50° C (32 ~ 122° F) Storage Temperature -20 ~ 60° C (-4 ~ 140° F)		Resolution	640 x 480 (VGA)
Color Support 16.2M/262K colors Contrast Ratio 600:1 Response Time 25 [msec] Backlight Life (hrs) 50,000 hrs T/S Type 4-Wire Resistive Touch Screen Surface Hardness 3H Durability 1 million touches Transparency 80% ± 3% Operating Temperature 0~50° C (32 ~ 122° F) Storage Temperature -20 ~ 60° C (-4 ~ 140° F)		Viewing Angle	80°/80° (H), 70°/70° (V)
Contrast Ratio 600:1 Response Time 25 [msec] Backlight Life (hrs) 50,000 hrs Touchscreen T/S Type 4-Wire Resistive Touch Screen Surface Hardness 3H Durability 1 million touches Transparency 80% ± 3% Operating Temperature 0~50° C (32 ~ 122° F) Storage Temperature -20 ~ 60° C (-4 ~ 140° F)	Display	Brightness	800 (cd/m²)
Response Time 25 [msec] Backlight Life (hrs) 50,000 hrs T/S Type 4-Wire Resistive Touch Screen Surface Hardness 3H Durability 1 million touches Transparency 80% ± 3% Operating Temperature 0~50° C (32 ~ 122° F) Storage Temperature -20 ~ 60° C (-4 ~ 140° F)		Color Support	16.2M/262K colors
Backlight Life (hrs) 50,000 hrs		Contrast Ratio	600:1
Touchscreen T/S Type 4-Wire Resistive Touch Screen Surface Hardness 3H Durability 1 million touches Transparency 80% ± 3% Operating Temperature 0~50° C (32 ~ 122° F) Storage Temperature -20 ~ 60° C (-4 ~ 140° F)		Response Time	25 [msec]
Touchscreen Surface Hardness Durability 3H Imillion touches Transparency 80% ± 3% Operating Temperature 0~50° C (32 ~ 122° F) Storage Temperature -20 ~ 60° C (-4 ~ 140° F)		Backlight Life (hrs)	50,000 hrs
Touchscreen Durability 1 million touches Transparency 80% ± 3% Operating Temperature 0~50° C (32 ~ 122° F) Storage Temperature -20 ~ 60° C (-4 ~ 140° F)		T/S Type	4-Wire Resistive Touch Screen
Durability 1 million touches Transparency 80% ± 3% Operating Temperature 0~50° C (32 ~ 122° F) Storage Temperature -20 ~ 60° C (-4 ~ 140° F)	Touchoroon	Surface Hardness	3H
Operating Temperature 0~50° C (32 ~ 122° F) Storage Temperature -20 ~ 60° C (-4 ~ 140° F)	IOUCIISCIECII	Durability	1 million touches
Storage Temperature -20 ~ 60° C (-4 ~ 140° F)		Transparency	80% ± 3%
		Operating Temperature	0~50° C (32 ~ 122° F)
Environment Lumidity 5 059/ @ 40° C pen condensing		Storage Temperature	-20 ~ 60° C (-4 ~ 140° F)
number of the first of the firs	Environment	Humidity	5 ~ 95% @ 40° C, non-condensing
Vibration 5-500Hz, 0.026G²/Hz, 2.16Grms, X, Y, Z		Vibration	
1 nour per axis		VIDIGION	
VGA x1; DVI-D x 1; 12 V_{DC} Jack x 1; USB x 1 (USB is reserved for the connection to enable touch usage only)		1/0	
(OSB is reserved for the connection to enable touch usage only) Keys: Menu, Up, Down, Auto Adjust, Monitor Power on/off	System		\$ 77
System OSD Menu Functions: Brightness, Contrast, Screen Setting, Color Temp, Language OSD Settings, VGA/DVI,		OSD	
Recall, Auto Adjust.	Oyotom		
Power 36 W power adapter, with AC 100 ~ 240 V input and DC +12V @ 3 A output		Power	
EMC Compliance CE/FCC/CCC		EMC Compliance	CE/FCC/CCC



IDS-3106

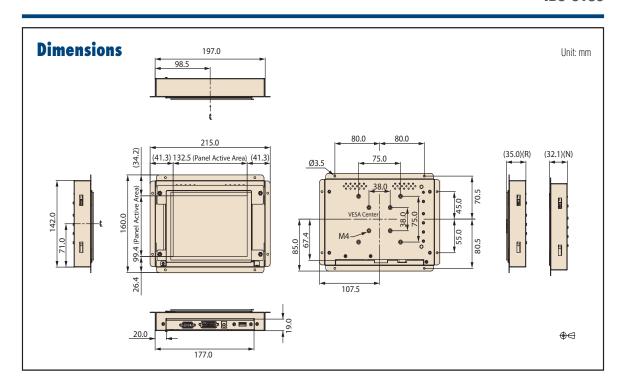

Packing List

Part Number	Description
1700002215	1 x M Cable USB-A(M)/USB-A(M) 180CM
1700021332-01	1 x VGA cable 15P(M) 1.8 meter
1962055040	4 x Clamper
1935042520	4 x Screw of clamper M4_25L

^{*} USB Cable is only included in IDS-3106R series.

Note: Package contents are subject to change without prior notice

Ordering Information

Model Name	Description
IDS-3106N-80VGA1E	6.5" VGA 800cd/m ² LED Open Frame Monitor
IDS-3106R-80VGA1E	6.5" VGA 800cd/m ² LED Open Frame Touch Monitor

Optional Items

Part Number	Description
1700001524	3-Pin Power Cord (USA)
170203183C	3-Pin Power Cord (EU)
1700008921	3-Pin Power Cord with PSE (Japan)
96PSA-A36W12R1-3	Adaptor AC100-240V 36W +12V/3A
1700000243-11	M cable DVI 19P(M)/DVI 19P(M) 191cm

For more compatible embedded board solution, please visit our Build Your display web page as bellow http://www.advantech.com/buildyourdisplay

Online Download www.advantech.com/products



Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508 Support: +1 347 719 4508

1309 Coffeen Ave Ste 1200 Sheridan WY 82801 USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050 Support: +44 (0)1785 879 050

Unit A5 Douglas Park Stone Business Park Stone ST15 0YJ United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660