


AVerAI EA713-AAMN Carrier Board

EA713-AAMN-0000 carrier board provides 2x M.2 or 4x mPCIe slots alternatively
It fully supports NVIDIA® Jetson AGX Xavier™ module

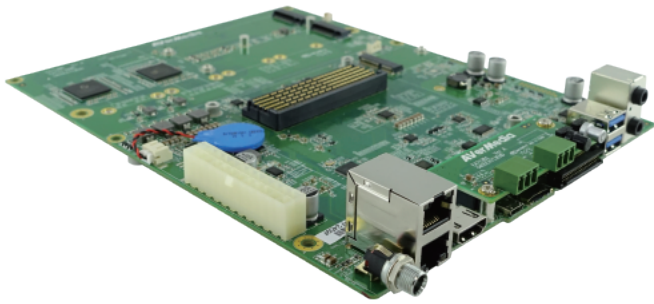

Features

- Fully support NVIDIA® Jetson AGX Xavier™ module
- 4x Mini-PCIe or 2x M.2 Key M 2280 alternatively
- 1x M.2 Key E 2230 for Wi-Fi module
- 1x M.2 Key M 2280 for NVMe
- 2x GbE, 2x USB 3.0, 1x 4Kp60 HDMI output
- 1x USB 2.0 Micro-B for BSP installation only , 1x micro SD
- 1x CAN bus, 1x RS-485, 1x Mic-in, 1x Speaker-out
- 40 pins: 1x UART, 2x I2C, 5x GPIO, and 1 x CAN (W/O transceiver)
- Operating temperature: -40°C ~ 85°C
- Carrier board dimension:
W:170mm x L:220mm x H: 38.5mm (6.69"x8.66"x1.52")

Embedded Vision Solutions for NVIDIA Jetson

AVerMedia offers 3 categories of Embedded Vision Solutions for AI application on the edge devices, with the support of NVIDIA Jetson family, battery power, HDMI/VGA/3G-SDI/Composite video sources, and the direct technical support for developers.

- Standard and customized of Nano/Tegra/AGX Xavier/Xavier NX carrier boards.
- Standard and customized Nano/Tegra/AGX Xavier/Xavier NX application-ready systems.
- Software design service of Linux BSP, driver, OpenCV, VisionWorks, and cuDNN.

Why AVerMedia

- As NVIDIA® PREFERRED solution provider, AVerMedia gets the direct support from NVIDIA. We are able to offer technical support in 24 hours to help your project success.
- Support full range of NVIDIA Jetson modules, including Nano, Tegra, and AGX Xavier.
- Support various video input sources from IP camera, USB camera, MIPI camera, and capture cards supporting HDMI/VGA/3G-SDI/Composite video sources.
- Provide customization services of HW, PCB, chassis, BSP, driver, and UX/UI/ID/ME design.
- Supports 65°C/149°F operating temperature in the No-Air-Flow environment for fanless system designed by using AVerCooler technologies.
- Provide flexible user-configured security to protect the SW.

Description

AVerMedia EA713-AAMN-0000 carrier board fully supports NVIDIA® Jetson AGX Xavier™ module which aims it at AI centric use cases for edge computing such as robotics and industrial automation within W:170mm x L:220mm x H:38.5mm dimension.

EA713-AAMN-0000 carrier board provides 4x Mini-PCIe and 2x M.2 Key M 2280 slots alternatively for Xavier to receive various video inputs by using AVerMedia's capture cards.

These 4x Mini-PCIe and 2x M.2 Key M 2280 slots share PCIe Gen2 x4 lanes, so EA713-AAMN-0000 can provide three different combinations for developers to install video capture cards alternatively, such as 4x mPCIe slots, 2x M.2 Key M 2280 slots, and 2x mPCIe slots with 1x M.2 Key M 2280 slot.

By using AVerMedia's extended video capture cards, Xavier is able to receive HDMI, VGA, SDI, composite video inputs, and even dual 4Kp30 HDMI video inputs for different application scenarios.

EA713-AAMN-0000 carrier board provides 2x GbE, and 2x USB 3.0 for Xavier to connect various IP cameras and USB 3.0 cameras. General purpose I/O are ready for developers to use such as 1x 4Kp60 HDMI output, 1x USB 2.0 Micro-B for BSP installation only, 1x micro SD, 1x Mic-in, and 1x Speaker-out, 1x CAN bus, 1x RS-485. It also provides 40 pins of GPIO expansion: 1x UART, 2x I2C, and 5x GPIO 1x CAN for Xavier to communicate with the external devices.

This highly integrated edge computer is a well prepared application ready platform for developers to overcome the challenges timely and easily.

AVerAI EA713-AAMN Carrier Board

EA713-AAMN-0000 carrier board provides 2x M.2 or 4x mPCIe slots alternatively
It fully supports NVIDIA® Jetson AGX Xavier™ module

Specifications

| | |
|-------------------------------------|---|
| Type | Carrier Board |
| NVIDIA GPU SoC Module Compatibility | NVIDIA® Jetson AGX Xavier™ module |
| Networking | 2x GbE (RJ-45) |
| Display Output | 1x HDMI type A, maximum resolution: 3840x2160 at 60Hz |
| Temperature | Operating Temperature -40°C ~ 85°C Storage Temperature -40°C ~ 85°C Relative Humidity 40 °C @ 95%, Non-Condensing |
| USB | 1x USB 2.0 Micro-B for BSP installation only 2x USB 3.0 Type-A (USB3.2 Gen1x 1) |
| Storage | 32GB eMMC 5.1 |
| RS-485 | 1x RS-485 |
| CAN bus | 1x CAN bus with transceiver |
| GPIO Expansion | 40 pins: 1x UART, 2x I2C, 5x GPIO, 1x CAN (W/O transceiver) |
| User Expansion | 1x M.2 Key E 2230 for Wi-Fi module 1x M.2 Key M 2280 for NVMe (PCIe Gen4x 4) 2x M.2 Key M 2280 (PCIe Gen2x 2) or 4x mPCIe Gen2 x1 |
| Input Power | 12V/5A |
| Buttons | Power and Recovery (each button has a RGB tri-color LED) |
| RTC Battery | Support RTC battery and Battery Life Monitoring by MCU |
| PCB/Electronics Mechanical Info | W:170mm x L:220mm x H: 38.5mm (6.69"x8.66"x1.52") |
| Mechanical Info | Weight: 269.6g |
| Certifications | CE, FCC, MSIP |

Compatible Cards



| Model Name | CM311-H | C353 | C353W | C351 | C351W | CN311-H | CN312SW |
|-----------------------|-----------------|-----------------|------------|--------------|------------|-----------------|-----------------|
| Host Interface | PCIe Gen2 x1 | PCIe Gen1 x1 | | PCIe Gen1 x1 | | PCIe Gen2 x2 | PCIe Gen2 x2 |
| Max Input Resolution | 1920x1080 60fps | 1920x1080 60fps | | NTSC/PAL | | 4096x2160 30fps | 2048x1080 60fps |
| Max Record Resolution | 1920x1080 60fps | 1920x1080 30fps | | NTSC/PAL | | 4096x2160 30fps | 1920x1080 60fps |
| Channel No. | 1 | 1 | | 4 | | 1 | 2 |
| H/W Encode | | ● | | | | | |
| Audio Interface | HDMI embedded | HDMI embedded | | RL (RCA) | | HDMI embedded | SDI embedded |
| Video Interface | SDI | | | | | | ● |
| | HDMI | ● | ● | | | | ● |
| | DVI | ● | | | | | |
| | VGA | ● | | | | | |
| Composite | | | ● | | | | |
| Color Depth/Precision | 8 bit | 8 bit | | | | 8 / 10 bit | 8 bit |
| Color Format | YUY2, YUYV | YUY2 | | YUY2 | | YUY2, YUYV | YUY2, YUYV |
| Operating Temperature | 0°C~50°C | 0°C~55°C | -40°C~85°C | 0°C~55°C | -40°C~85°C | 0°C~40°C | -20°C~70°C |
| Dimensions (LxW) mm | 50.95x30 | 50.95x30 | | 50.95x30 | | 22x80 | 22x80 |

* All specifications are subject to change without prior notice.



MSIP Class A Statement (Korea)

사용자안내문

이 기기는 업무용 환경에 ¼ - 사용할 목적으로 적합성평가를 받은 기기로서 ¼ - 가정용 환경에 ¼ - 사용하는 경우 전파간섭의 우려가 있습니다.

This equipment has been tested for compliance with the intended use in a commercial environment. If the equipment is used in a domestic environment, it may cause radio interference.

※ 사용자 안내문은 "업무용 방송통신기자재"에만 적용한다.

※ User's Guide applies only to "Commercial Broadcasting Communication Equipment".



©2019 by AVerMedia Technologies, Inc. All rights reserved.

No part of this document may be reproduced or transmitted in any form, or by any means (Electronic, mechanical, photocopy, recording, or otherwise) without prior written permission of AVerMedia Technologies. Information in this document is subject to change without notice. Made in Taiwan
Version 1.4 2019/12/17

AVerMedia

Type : Carrier board
Model name : EA713-AAMN

