



M.2-COM4

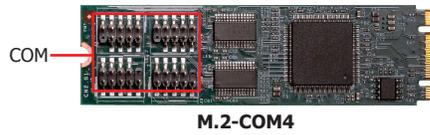

M.2-COM4

Mechanical Drawing

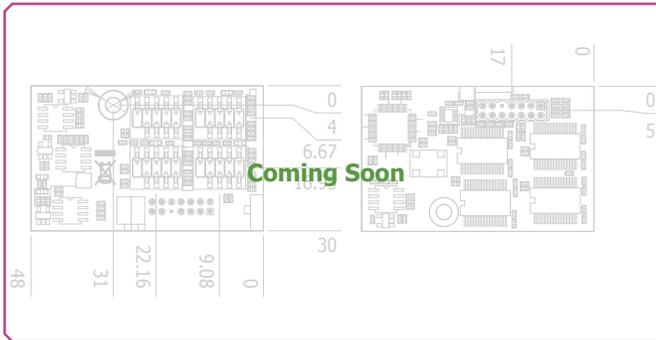

Ordering Information

Module Name	P/N	Form Factor	Port Number
M.2-COM4	770-M2COM1-000G	M.2 B-M key 22mm x 80mm	4 ports

Features

PORT	RS232/RS422/RS485
MODE	RS232/422/485 Selected by SW
INPUT INTERFACE	PCIe x1
FORM FACTOR	M.2 B-M key

Specifications

I/O CONNECTORS

- RS232/RS422/RS485 functions with DB9 connector.

POWER INPUT

- 3.3V via M.2 connector

APPLIED MODELS

- All DFI systems and boards with M.2 interface

TEMPERATURE

- Operating: -40°C to 85°C
- Storage: -40°C to 85°C

HUMIDITY

- 5% to 90%

FORM FACTOR

- M.2 B-M Key 22mm x 80mm (4 ports)

REGULATION

- CE/FCC class B/RoHS



Packing List

• 1 M.2 serial port module	
• 4 COM port cable (Length: 250mm)	A81-017001-001G