


OPS871-HM

Intel® Core™ i5/i3 Open Pluggable Specification (OPS) Digital Signage Player with Intel® HM76 and TPM 1.2



- | | |
|------------------|-----------------------------|
| 1. 2.5" HDD slot | 7. Audio (Line-out) |
| 2. USB 3.0 x 2 | 8. Audio (Mic-in) |
| 3. Ethernet | 9. Power indicator |
| 4. HDMI | 10. HDD indicator |
| 5. Power Switch | 11. JAE TX-25 |
| 6. Reset | 12. WiFi antenna (optional) |

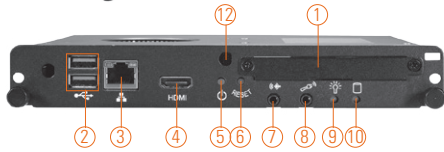

Specifications

Main System	CPU	Supports Socket G2 (rPGA988B) for 3rd Generation Intel® Core™ i5/i3 processors (Ivy Bridge)	
	Chipset	Intel® HM76	
	System Memory	1 x 204-pin DDR3 1600 SO-DIMM max. up to 8 GB	
	Storage	1 x 2.5" SATA HDD tray	
	BIOS	AMI UEFI BIOS with OA 3.0 built	
	Watchdog Timer	255 levels, 1 ~ 255 sec.	
	IO	2 x USB 3.0	
		1 x 10/100/1000Mbps Ethernet	
		1 x Power on/off button	
		1 x Reset button	
1 x HDMI			
1 x Audio (Line-out/Mic-in)			
1 x DisplayPort (via OPS JAE interconnector) (Pure DP)			
2 x USB 2.0 (via OPS JAE interconnector)			
1 x USB 3.0 (via OPS JAE interconnector)			
1 x HDMI/DVI (via OPS JAE interconnector)			
1 x Audio (Line-out, via OPS JAE interconnector)			
1 x UART (TX/RX, via OPS JAE interconnector)			
Indicator	1 x LED for system power ON		
	1 x LED for HDD active		
WiFi	Supports 802.11 b/g/n (optional)		
Expansion Slot	1 x PCI Express Mini Card		
Dimensions	200 mm (7.87") (W) x 119 mm (4.68") (D) x 30 mm (1.18") (H)		
	Packing Dimensions	270 mm (10.63") (W) x 197 mm (7.76") (D) x 70 mm (2.76") (H)	
Weight (net/gross)	1 kg (2.2 lb)/1.5 kg (3.3 lb)		
Environmental	0°C ~ +45°C (+32°F ~ +113°F) (With airflow 1.2m/s)		

Packing

- 1 x driver CD
- 1 x HDD mylar x 1
- 1 x thermal grease (syringe 1G)
- 2 x M3 x 4 screw
- 2 x M4 x 6 screw

Features

- Open Pluggable Specification (OPS) compliance
- Supports Socket G2 (rPGA988B) 3rd Generation Intel® Core™ i5/i3 processor (Ivy Bridge)
- Intel® HM76 chipset
- DDR3-1600 SO-DIMM max. up to 8 GB
- USB 3.0, PCI Express Mini Card
- Easy maintenance: pluggable HDD and easy-to-change DRAM
- HDMI interface for 2nd display
- Supports TPM 1.2



▲ Rear view

Optional OS Installation

Windows® XP, Windows® 7, Windows® Embedded 8

Ordering Information

Standard


OPS871-HM (P/N:E22M871101)	OPS digital signage player supports socket G2 3rd Gen Intel® Core™ processor
OPS871-HM-SF (P/N:E22M871102)	OPS digital signage player supports socket G2 3rd Gen Intel® Core™ processor with smart fan solution

Optional

AX93157	OPS docking board
---------	-------------------

* Specification and certifications are based on options and may vary.

Dimensions

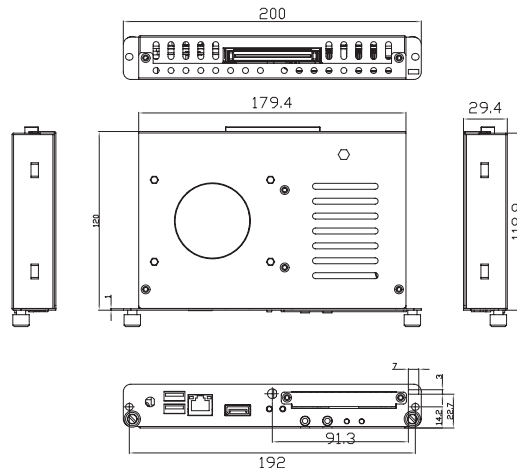

* All specifications and photos are subject to change without notice.