
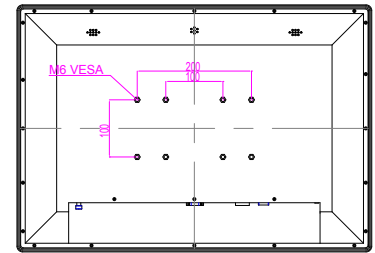
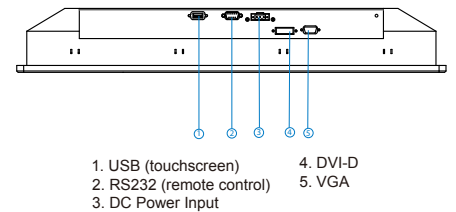


26" Flat P-CAP Marine Display

Model#: W26L100-MRA1FP

Features :

- 26" 1920 x 1200 resolution with projective capacitive multi-touch screen
- Edge-to-edge narrow bezel design and fanless cooling system
- Color calibrated for ECDIS compliance
- Capacitive touch keys for quick function access and display control (Support ECDIS DAY, DUSK, and NIGHT mode switching)
- Compliant with marine standards (DNV2.4, IEC 60945 4th, IACS-E10)

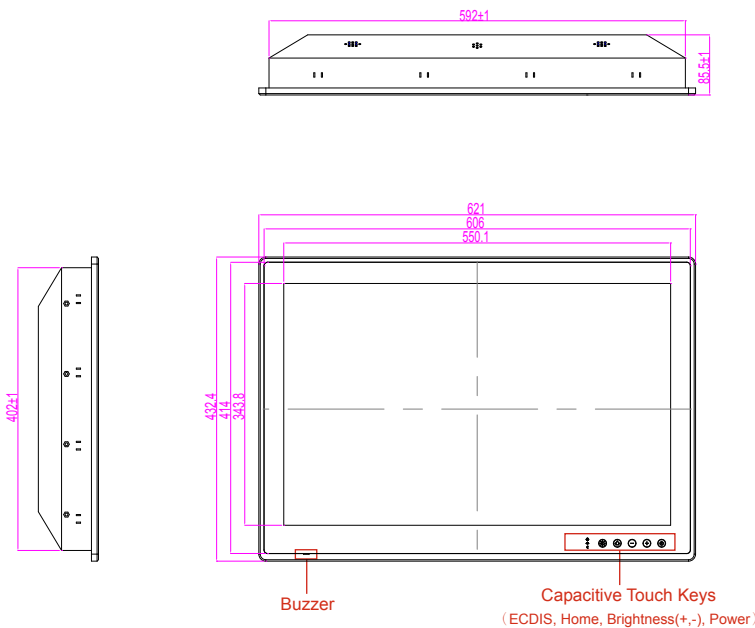

* Note: this is a simplified drawing and some components are not marked in detail. *Please contact our sales representative if you need further product information.

Display Specifications :

Resolution	: 1920 x 1200
Pixel Pitch	: 0.2865 (H) x 0.2865 (V) mm
Contrast Ratio	: 1500:1(typ.)
Brightness	: 350 cd/m ² (typ.)
Viewable Angle	: 88°/88°/88°/88° (typ.) (Up/Down/Left/Right)
Active Display Area	: 550.1 (H) x 343.8 (V) mm
Max Colors	: 16.7 M colors, 8 bits/color
Touch Screen	: Projective Capacitive Multi-touch (Optional AR Protection Glass)
Buzzer	: 75 dB~80 dB, 2300 Hz, 1m

Input / Output Connectors

RGB Signal IN	: D-SUB 15pin connector (female)
DVI-D Signal IN	: DVI-D 24pin connector (female)
DC Power IN	: 3pin Terminal block (Phoenix type)
Remote control via RS232	: D-SUB 9pin connector (female)
Touch Signal OUT	: USB type A connector (female)

Power Specifications :

Power Input	: 24V DC-in with Isolation (9~36V acceptable)
-------------	---

User Controls :

OSD control via programmable capacitive touch keys
(ECDIS, Home, Brightness(+,-), Power)
Remote control via RS232 serial interface

Mechanical

Mechanical Mounting	: Panel Mount, VESA Mount
Dimension	: 621mm x 432.4mm x 85.5mm
Panel Mount Cutout	: 598mm x 408mm
Housing	: Anodized Aluminum Bezel
IP Rating	: IP66 (Front Side)

Environmental

Operating Temperature	: -15 to 55 deg.C
Operating Humidity	: 5% to 95% (non condensing)
Anti-Vibration	: 0.7g@DNV2.4 (Class A)
Anti-Shock	: 15G,11ms duration

Certification

DNV 2.4, IEC60945 4th, CE, FCC