

D115OXB/D115ONB Box PC [Preliminary]

NVIDIA® Jetson Orin NX/Orin Nano module



For Smart Retail, Smart Security and Smart City Applications

Overview

AVerMedia's AI Box PC D115OXB/D115ONB equips powerful NVIDIA® Jetson Orin NX/ Orin Nano module. This efficient system-on-module (SoM) opens new worlds of embedded IoT applications with full analytic capabilities.

D115OXB/D115ONB is designed for the industry applications with spatial concern and feature a rich assortment of I/O ports for rapid AI-based solution development and seamless deployment as required by demanding business applications.

AVerMedia supports businesses of all sizes and offers customizable BSP services, flexible MoQ, in addition to NVIDIA's JetPack™ SDK.

Enterprise-Leading Features

- Embedded NVIDIA® Jetson Orin NX/ Orin Nano module
- 2 x 2 Lane MIPI CSI-2 MIPI Camera input (internal)
- 2 x M.2. for WIFI and SSD
- 2 x GbE RJ-45
- 3 x USB 3.2 (1x internal)
- 1 x HDMI output
- 20-pins expansion header
- Dimension: W: 126mm x L: 96mm x H: 74mm

The AVerMedia Advantage



Video Processing Technology



Flexibility & Reliability



Dedicated After-Sales Support

AVerMedia understands that each business has a unique set of requirements that requires professional expertise and support. With AVerMedia, you are guaranteed to work with a proven global leader in video processing technology (200+ video capturing & streaming patents) with decades of experience processing multiple video signals for countless award-winning products.

A global leader that supports businesses of all sizes with comprehensive customization services (i.e., HW/PCB/BSP/etc.), flexible MoQ while ensuring a high-quality design and stable product. And for projects requiring additional security, we can provide customizable encryption hardware to support your privacy needs.

By partnering with us, a dedicated NVIDIA® ELITE Partner, our support-driven team offers prompt after-sales support so that your company stays focused on what matters most, customer acquisition.

D115OXB/D115ONB Box PC

NVIDIA® Jetson Orin NX/ Orin Nano module

Application

Powered by NVIDIA’s Jetson SoM, this power efficient SoM enables AI calculations and predictions on the edge of the network for applications such as driver safety and cost efficiency relationships. An expansive amount of interface options are available supporting AHD, IP, MIPI, etc., and is suitable for multiple scenarios requiring camera flexibility. And for various locations of installment the fanless design combined with optimized thermal chassis ensures full loading through a large temperature range.

AVerMedia Ecosystem

We provide a rich ecosystem of partners to support your growth with the ability to help search for new business partners for your unique project. Our verified partner ecosystem maintains the highest level of experience and professionalism, while offering hardware, software and strategic services. No matter the size or level of experience, if you are looking to accelerate your growth, we have the resources to make it happen.

Optional Accessories


MIPI Camera

- For 15 pin MIPI connector:
1. raspberry pi camera v2 /rasberry pi camera v3
 2. Manufacturer: APPRO.PHO
 - B-04: IMX179 (8M) MIPI, 1080P (30fps)
 - C-04: IMX290 (2M) MIPI, 1080P (30fps)
 - C-05: IMX290 (2M) +ISP (YUV), 1080P (30fps)

Interface Diagram [Preliminary]

Front left

Front right

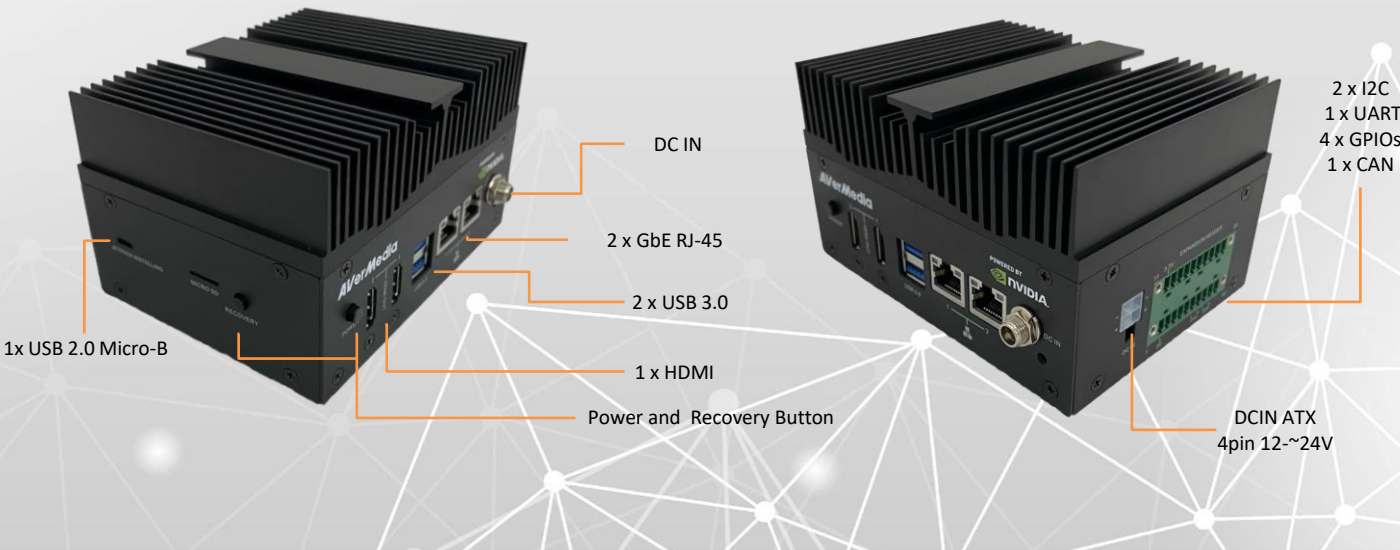

D115OXB/D115ONB Box PC

NVIDIA® Jetson Orin NX/ Orin Nano module

Specifications

Model	D115OXB-16G/D115OXB-8G	D115ONB-8G /D115ONB-4G
Type	Box PC	
NVIDIA GPU SoC Module Compatibility	NVIDIA® Jetson Orin NX module	NVIDIA® Jetson Orin Nano module
Networking	2x GbE RJ-45 1xM.2. key E 2230 for wifi	
Display Output	1x HDMI 4Kp60	1x HDMI 4Kp30
Temperature	Operating temperature 0°C~60°C (TBD) Storage temperature -40°C ~ 85°C Relative humidity 40 °C @ 95%, Non-Condensing	
MIPI Camera Inputs (Internal)	2x 2 lane MIPI CSI-2, 15 pin FPC 1mm Pitch Connector	
USB	1x USB 2.0 Micro-B for recovery 3x USB 3.2 Type-A (2 x in the Front side; 1 x inside the Box PC)	
Storage	1x M.2. key M 2280 for NVMe (256G SSD installed in box PC)	
Expansion Header	20 pins: 2x I2C, 1x UART, 4x GPIOs, 1xCAN (EU terminal block)	
Power requirement	DC in JACK on board & ATX 4pin 12V/5A, 12V~19V is recommended.	
Power Cord	US/JP/EU/UK/TW/AU/CN	
Fan Module	Fanless solution	
Buttons	Power and Recovery	
RTC Battery	Support RTC battery and Battery Life Monitoring by MCU	
PCB/Electronics Mechanical Info	W: 126mm (W) x 96mm (L) x 74mm (H) Weight: 1kg	
Certifications	CE, FCC, KC	
Package	1x D115OXB 16G or 8G (256G SSD installed) 1x Adapter and Power cable	1x D115ONB 8G or 4G (256G SSD installed) 1x Adapter and Power cable

*All specifications are subject to change without prior notice.

