



DS SERIES

DS552LT4-M


55" Fanless High Brightness Digital Signage Display
Intel® SDM Ready




**SUNLIGHT
VIEWABLE IMAGE**




FANLESS



**INTEL® SMART
DISPLAY MODULE
COMPATIBLE**



**24 / 7
OPERATION**



**TRUECOLOR™
CALIBRATED**

FOR MORE INFORMATION

For more information about DynaScan, visit our site at www.dynascandisplay.com. Copyright © DynaScan Technology Inc. All rights reserved. All specifications and descriptions are subject to change without notice. Reproduction without permission is prohibited.




DynaScan

SPECIFICATION

MODEL	DS552LT4-M		
PANEL	LCD Panel Size	54.64 inches LCD	
	Native Resolution	1920 x 1080	
	Backlight	LED	
	Default Color Temperature	D65 (6500 K)	
	Brightness	3500 nits	
	Color Depth	8 bits	
	Contrast Ratio	3000:1	
	Response Time	9 ms (Typ.)	
	Viewing Angle (H/V)	178° / 178°	
	Light Life Time (Typ.)	100,000 hrs	
POWER	Panel Surface	AR, 2H	
	Blackening Defect Free	Up to 110°C (230°F)	
	Viewable With Polarized Lenses	Yes	
	Power Supply	Internal	
	Rated Voltage	100-240V ~ 50/60Hz	
	Power On Mode (Typ./ Max.)	170 W / 290 W	
	Power Saving Mode	< 1 W	
	AC out	< 100 W	
	MECHANICAL SPECS	Bezel Width (T/B/L/R)	Even bezel 10.9 mm
		Cabinet Color	Black
Monitor Dimension (LxHxD)		1239.4 x 710.0 x 87.7 mm	
Monitor Weight		27.5 kg	
Orientation		Portrait / Landscape	
VESA Mounting (LxH)		400 x 400 mm	
Carrying Handles		Yes	
Fanless Design		Yes	
USER INTERFACE		Language	English
		Built-in Video Wall Support	Up to 15x15
	Support SNMP (Up to V3.0)	Yes	
	Dimming Control	Yes	
	Image Retention Protection	Yes	
	Auto Orientation Sensor	Yes	
	Ambient Light Sensor	Yes	
	Power On/Off Scheduling	Yes	
	Internal Temperature Sensor	Yes	
	OSD Menu Rotation	Yes	
EXPANSION SLOT FOR INTEL® SDM <small>SDM S/L module not included in the product.</small>	SDM Slot	SDM-S (support with DynaScan extended board) & SDM-L Compatible	
	Power Support	Up to 45 W	
INPUT	HDMI	x1 (1080p)	
	DVI-D	x1	
OUTPUT	DisplayPort	x1	
	DVI-D	x1	
EXTERNAL CONTROL	Audio	x1	
	RS-232	In x1, Out x1	
ENVIRONMENT	Operating Temperature	0° C ~ 45° C	
	Storage Temperature	-20° C ~ 60° C	
CERTIFICATION	Humidity	10% ~ 80% RH Non-condensing	
		CE / FCC / RoHS	

DIMENSIONS

Unit: mm [inch]

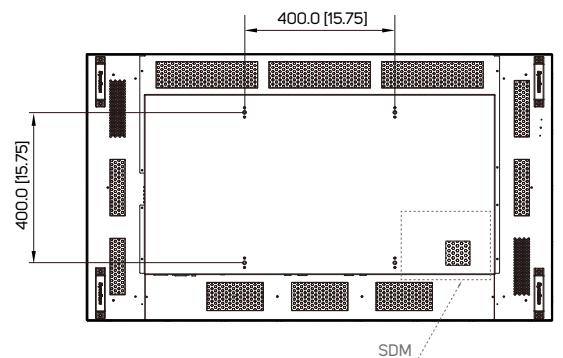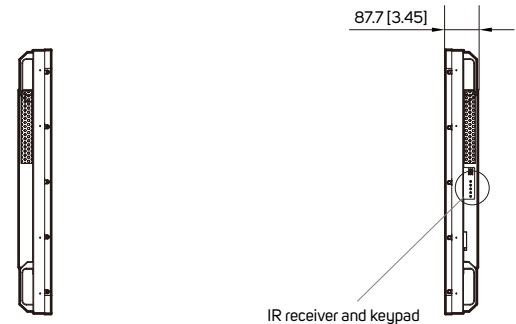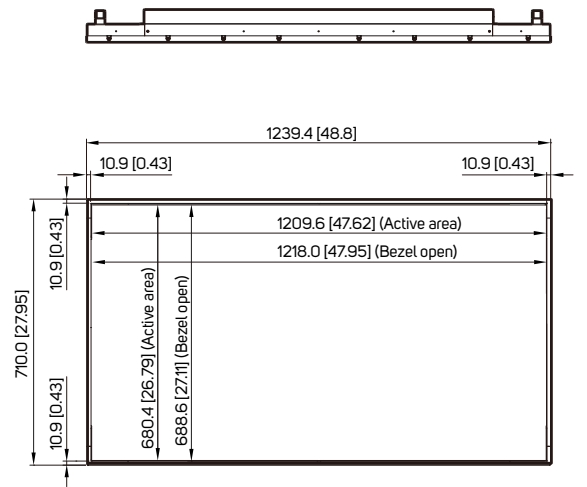

INTERFACE

