




## ESM-SKLA

6th Gen Intel® Xeon® E3-1500 series /Core™ Processor i3 series Type6 COMe Basic Module with Intel® CM236 Chipset

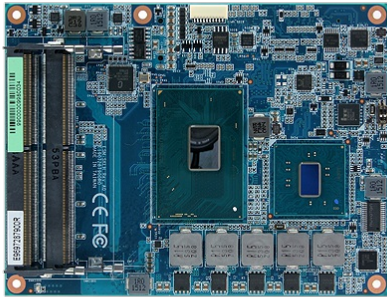

- > Onboard 6th Gen Intel® Xeon® E3-1500 series / Core™ i3 series Processor
- > Two 260-pin SODIMM DDR4 SDRAM slot up to 32GB, CM236 Support ECC Function
- > Dual-channel 18/24-bit LVDS, VGA, DP/HDM/DVI, eDP Option
- > Intel® I219LM Gigabit Ethernet
- > 8 PCIe x1, 1 PCIe x16, 4 SATA, 8 USB 2.0, 4 USB 3.0
- > HD Audio Interface
- > Type 6 Rev 2.1 Pin-out
- > TPM 2.0

**+** Spec

-System Information-	
<b>Processor</b>	6th Gen Intel® Xeon® E3-1505M v5 4-Core 2.8GHz processor 6th Gen Intel® Xeon® E3-1505Lv5 , 4-Core 2.0GHz Processor 6th Gen Intel® Core™ i3-6100E , 2-Core, 2.7GHz Processor 6th Gen Intel® Core™ i3-6102E , 2-Core, 1.9 GHz Processor
<b>Platform Controller Hub</b>	Intel® CM236 Express Chipset
<b>System Memory</b>	2 x 260-Pin DDR4 2133MHz SO-DIMM up to 32 GB (CM236 Support ECC Function)
<b>I/O Chipset</b>	EC ITE IT8528E
<b>BIOS Information</b>	AMI uEFI BIOS, 128Mbit SPI Flash ROM
Expansion	
<b>Expansion</b>	8 x PCIe1
I/O	
<b>USB Port</b>	8 x USB 2.0 4 x USB 3.0
<b>COM Port</b>	2 x UART
<b>SATA</b>	4 x SATA III
<b>DIO</b>	1 x 8bit GPIO
<b>MIO</b>	1 x SMBus 1 x LPC 1 x I2C
Display	
<b>Graphic Chipset</b>	Intel® Skylake SoC integrated Graphics
<b>Spec. &amp; Resolution</b>	VGA: Max. resolution 1920x1080 @ 60Hz LVDS: Max. resolution 1920x1080 @ 60Hz HDMI: Max. resolution 4096x2304 @ 24Hz (HDMI Max resolution only one display output)
<b>Multiple Display</b>	(VGA + DP ) + HDMI + DDI LVDS + (VGA + DP ) + DDI LVDS + (VGA + DP ) + HDMI LVDS + HDMI + DDI
<b>LVDS</b>	CH7511B(eDP to LVDS)
<b>DDI</b>	HDMI DVI DisplayPort
Audio	
<b>Audio Interface</b>	Intel® High Definition Audio
Certifications	
<b>Certification Information</b>	CE FCC Class B
Ethernet	
<b>LAN Chipset</b>	1 x Intel® I219LM
<b>Ethernet Interface</b>	10/100/1000 Base-Tx GbE compatible
Mechanical & Environmental	
<b>Operating Temperature</b>	0°C ~ 60°C (32°F ~ 140°F)(Standard)
<b>Storage Temperature</b>	-40°C ~ 75°C (-40°F ~ 167°F)
<b>Operating Humidity</b>	40°C @ 95% Relative Humidity, Non-condensing
<b>Weight</b>	0.44lbs(0.2kg)
<b>Power Requirement</b>	+9V ~ +19V
<b>ACPI</b>	Single Power ATX Support S0, S3, S4, S5 ACPI3.0 Compliant
<b>Power Mode</b>	AT/ATX
<b>Dimension (L x W)</b>	5" x 3.7" (125mm x 95mm)
Software Support	



<b>OS Information</b>	Win 7 / Win 8.1 / Win 10 / Linux
<b>Ordering Information</b>	
<b>Ordering Information</b>	<p>ESM-SKLA-05M-A1R Intel® Xeon® E3-1505M v5 Type6 COMe Basic Module</p> <p>ESM-SKLA-05L-A1R Intel® Xeon® E3-1505L v5 Type6 COMe Basic Module</p> <p>ESM-SKLA-6100-A1R Intel® Core™ i3-6100E Type6 COMe Basic Module</p> <p>EEV-EX14-B1R mATX Ev. Board for COMe Type 6 A1.1</p> <p>ACC-ESMSKLH-CL-1R Cooler for ESM-SKLH/ESM-SKLA W/FAN H=43.5mm</p> <p>ACC-ESMKBLH-SD-1R Heatspreader W/O FAN H=8.0mm (for ESM-KBLH/ESM-KBLA/ESM-SKLH/ESM-SKLA)</p>