

R15L100-OFC3HB

15" Open Frame High Brightness Display



KEY FEATURES


- 15", 1024 x 768
- VGA and HDMI input
- Open frame
- VESA mount
- High brightness



SPECIFICATIONS

| Display | | | |
|----------------------------|--|------------------------------|---|
| Resolution | 1024x768 | Size | 15.0 inches |
| Contrast Ratio | 2000:1 | Panel Brightness | 1000.0 nits |
| Display Color | 16.2M Colors | View Angles | 88,88,88,88 |
| Active Area | 304.1x228.1 mm | Touch / Glass | Resistive Touch Screen (Optional) Protection Glass w/o Touch Function (Optional) SAW Touch (Surface Acoustic Wave) (Optional) |
| Environment | | | |
| Operating Humidity | 10% to 90% RH, Non-Condensing | Operating Temperature | 0°C to 50°C |
| Storage Temperature | -10°C to 60°C | | |
| Certification | | | |
| Certification | CE, FCC | | |
| IO Ports | | | |
| USB Port | 1 x USB for Touch Screen (Optional) | Video | 1 x VGA 1 x HDMI (Optional) 1 x DVI (Optional) |
| Audio | Audio line in (3.5mm) (Optional) 2 x Speaker (Optional) | | |
| Mechanical | | | |
| Dimension | 357.6 x 292 x 49.8 mm | Mounting | VESA Mount/ Rear Mount |
| Enclosure | Metal | Cooling System | Fanless Design |
| Accessory | | | |
| Accessory | 1 x VGA cable 1 x HDMI cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product) | Optional Accessory | Remote Controller (Optional,Varies by product) |
| Power | | | |
| Power Rating | 12V DC in 24V DC in (optional) | | |
| Control | | | |

DIMENSIONS UNIT:MM

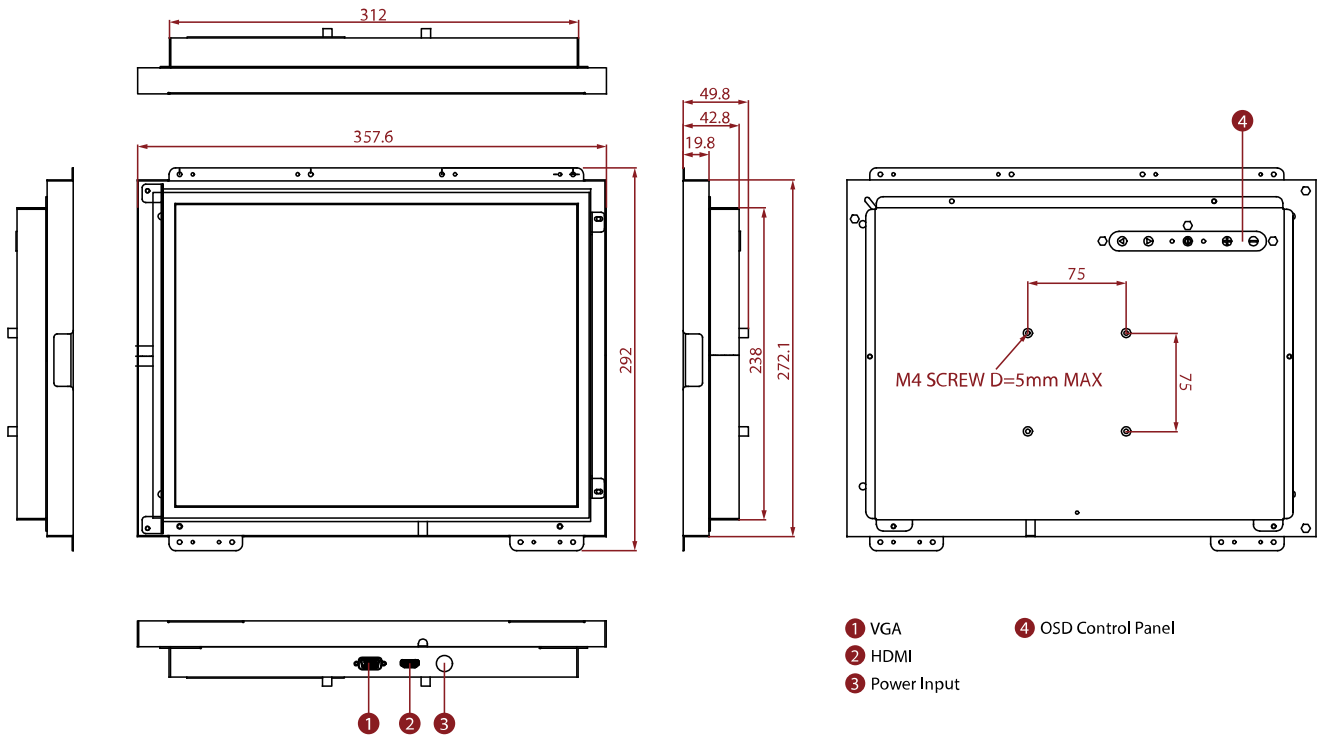

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.