

R17L500-65M1

17" IP65 Stainless Resistive Chassis Display



KEY FEATURES

- 17", 1280 x 1024
- Support VESA / YOKE mount
- Chassis
- Stainless housing SUS 316 / AISI 316
- Full IP65 waterproof and dustproof
- Optical bonding (optional)



SPECIFICATIONS

Display	
Resolution	1280x1024
Contrast Ratio	1000:1
Display Color	16.2M Colors
Active Area	337.920x270.336 mm
Size	17.0 inches
Panel Brightness	350.0 nits
View Angles	85,85,80,80
Touch / Glass	Resistive Touch Screen (Optional) Protection Glass Without Touch Function (Optional)
Mechanical	
Dimension	412 x 344 x 63.3 mm
Mounting	VESA Mount Yoke Mount
Weight	8.5kg
Cooling System	Fanless design
Enclosure	Stainless Housing
Environment	
Operating Humidity	10% to 90% RH, Non-Condensing
Operating Temperature	0°C to 45°C
Storage Temperature	-20°C to 60°C
IP rating	IP65
Certification	
Certification	CE, FCC
IO Ports	
Power Input	1 x M12 waterproof connector for 12V DC
USB Port	1x M12 waterproof connector for touch screen control (Optional)
Serial Port	1 x M12 waterproof connector for touch screen control (Optional)
Video	1x M12 type connector for VGA input 1x waterproof DVI input (Optional) 1x waterproof connector for HDMI input (Optional)
Indicator	1 x LED Indicator for power 1 x LED Indicator for status
Control	
Button	1 x Power Button 1 x Adjust up button 1 x Adjust down button 1 x ESC (Auto) button 1 x OK (Menu) button
Accessory	


Accessory 100~240V AC to DC Adapter with waterproof connector
Power Cord
External VGA cable with waterproof connector
Waterproof caps
Manual
VESA screws

Optional Accessory Yoke mount stand (Optional)
External HDMI cable with waterproof connector (Optional)
External DVI cable with waterproof connector (Optional)
External USB cable with waterproof connector for touchscreen control (Optional)
External RS232 cable with waterproof connector for touchscreen control (Optional)

Power

Power Rating 12V DC (M12 type)

DIMENSIONS UNIT:MM

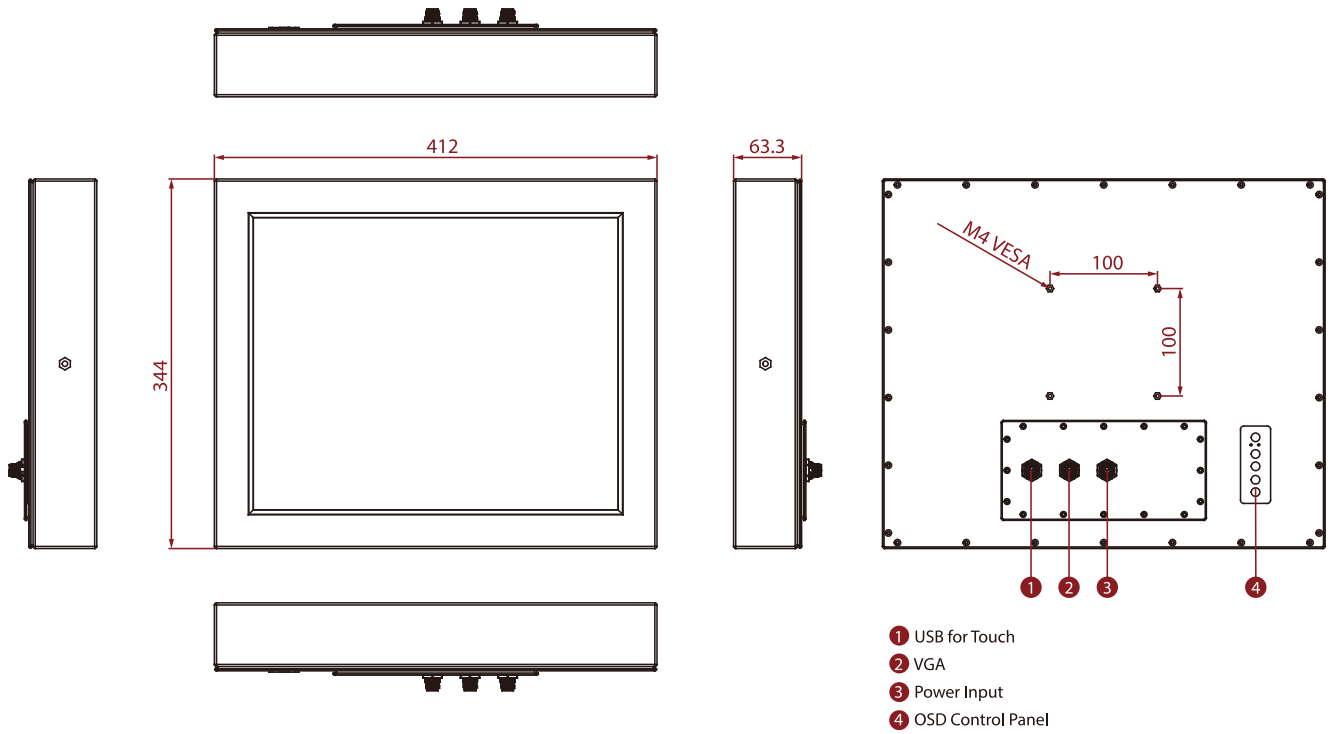

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.