Sureview 43" Outdoor PCAP Wall-Mounted Touch Screen Displays





PCAP Touch Screen

State-of-the-art projected capacitive technology provides the most responsive and sensitive touch experience available, as well as offering superior optical quality. Unlike other touch technologies, PCAP is not affected by dust or debris on the surface of the screen.





Weatherproof

Designed to withstand the elements, these displays are protected against all wet weather conditions and airborne dust particles by their robust IP65 rated enclosure. They also feature a waterproof coating on all internal circuit boards and waterproof over-moulded AV connectors.











Sunlight Readable



Vandal Proof



No Ghost Touch



Advanced Temperature Control System



Ambient Light Sensor



Anti-Reflective Glass



Free Lockable Wall Mount



Protective UV Film



Android Media Player



Customisation Available



Other Features

Vandal Proof

With a mild steel enclosure and thermally-toughened glass front, these IK10 rated displays are designed to withstand any damage that may occur in public spaces. To avoid tampering, controls and inputs are hidden and cannot be accessed by passers-by.



No Ghost Touch

The electrodes that control the interactivity are sandwiched between two layers of special protective glass to prevent phantom touches. This ensures ultimate accuracy and a seamless touch experience.





Internal Locker

Should you need run the screen from an external source, there is space to fit a small PC or media player inside the lockable compartment. This can then be connected to the display via the HDMI, VGA or 3.5mm audio inputs.



Ultimate UV Protection

The front glass of the display utilises a special UV treatment that reduces the internal heat of the enclosure by up to 71%; reducing the number of cooling fans needed and increasing the life of your display.



Direct Sunlight Readable

Thanks to their commercial grade ultra-high brightness panels (2,500cd/m²), these displays are up to 10 times brighter than a domestic TV and so are easily readable even in direct sunlight.





Advanced Temperature Control System

To maximise the lifespan of the display, the internal airflow system keeps the screen running at the optimal temperature regardless of the external conditions. Built-in air conditioning can be tailored to allow the display to work in any climate.





Anti-Reflective Glass

The front glass face is specially treated to help diffuse direct sunlight, making the display easily readable even in bright weather conditions.



Customisation Available

Bespoke displays can be manufactured to order should you require a non-standard solution, to incorporate a camera for example. We can also modify existing models to add a 4G module for mobile connectivity or a vinyl logo/wrap.












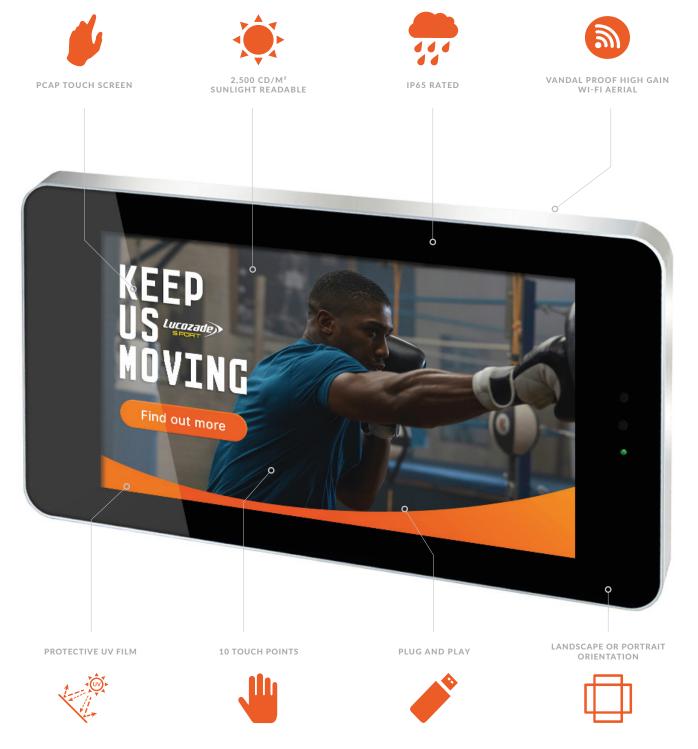











Specification Table


Resolution			43 Inch
Panel		Resolution	
Panel Aspect Ratio 16:9 Panel Brightness (ed.m*) 2.500 (Colour 16.7M Viewing Angle 178* Contrast Ratio 8000.1 Touch Technology Projected Capacitive Flowing Angle 10 Glass Hardness 4H Minimum AV Inputs Video Power Consumption (W) 250 Input Voltage AC110-2400 (Sobra-2601z) Input Voltage AC110-2400 (Sobra-2601z) Mechanical YeSA Holes (Simm) VESA Holes (Simm) 400x400 Mechanical KeSA Holes (Simm) VESA Holes (Simm) 400x400 Mechanical KeSA Holes (Simm) VESA Holes (Imm) 400x400 Mechanical KeSA Holes (Imm) VESA Holes (Imm) 400x400 Mechanical KeSA Holes (Imm) VESA Holes (Imm) 400x400 Mechanical Kesa (Imm) VESA Holes (Imm) 400x400 Mechanical (Imm) 400x400 Keri Weight	Panel		
Panel Brightness (cd/m²) 2,500 Colour 1,6,7m Civering Angle 1,78° Contrast Ratio 8000.1 Fouch Touch Projected Capacitive Fouch Touch Points Glass Hardness 4H Minimum AV Inputs Video Power Power Consumption (W) Power (Power) Input Voltage Input Voltage ACT10-240V (50Hz-40Hz) Power (Power) Power (Power) Input Voltage ACT10-240V (50Hz-40Hz) Power (Power) Power (Power) Input Voltage ACT10-240V (50Hz-40Hz)			
Colour			
Viewing Angle 178°			
Contrast Ratio 8000:1			
Touch Technology			
Touch Touch Points 10 Glass Hardness 4H Minimum AV Inputs Video HDMI, VGA Power Power Consumption (W) 250 Input Voltage AC110-240V (50Hz-60Hz) Unit Size (WxHxD mm) 1410x670x140 Peackage Size (WxHxD mm) 1550x850x300 Mechanical VESA Holes (mm) 400x400 Net Weight (kg) 65 Gross Weight (kg) 82.5 IK Rating IK10 Operating Temperature: -20 °C to 50 °C Operating Humidity: 100x -800% Environmental Storage Temperature: -30°C -60°C Storage Humidity: 5% -90% Environmental Fenciouse Protection 1085 Environmental Media Formats Video (MPG, AVI, MPA, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG) Environmental Media Formats Video (MPG, AVI, MPA, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG) Media Formats Video (MPG, AVI, MPA, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG) Computer Media Formats Video (MPG, AVI, MPA, RMVB, T			
Glass Hardness	Touch		
AV Inputs Video HDMI, VGA			
Power			
Provided Injust Voltage	AV Inputs		
Unit Size (WxHxD mm)	Power		
Mechanical Package Size (WxHxD mm) 1550x850x300 Methodish (kg) 65 Gross Weight (kg) 82.5 IK Rating IK10 Memory Operating Temperature: -20 °C to 50 °C Operating Humidity: 10% -80% Environmental Storage Temperature: -30°C -60°C Storage Humidity: 5% -90% Enclosure Protection IP65 Media Formats Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG) Media Resolution 1920x1080/1080x1920 CPU Quad-Corr			
Mechanical VESA Holes (mm) 400x400 Met Weight (kg) 65 Gross Weight (kg) 82.5 IK Rating IK10 Departing Temperature: -20°C to 50°C Operating Humidity: 10% -80% Storage Temperature: -30°C - 60°C Storage Temperature: -90°C - 60°C Environmental Bit Storage Temperature: -90°C - 60°C Storage Temperature: -90°C - 60°C Environmental IP65 Media Formats Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GJF, BMP, PNG) Media Formats Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GJF, BMP, PNG) Media Resolution 1920x1080/1080x1920 Internal Memory GB GPU Quad-Core Cortex-A17@1.61GHz GPU Mali-T760 MP4 @600MHz USB USB2.0 HOST (x2) LAN 10/100/1000mM/s Ethernet Wi-Fi 802.11b/g/n/ac Accessories Indued AC Power Cable, Remote Control, Wall Mount Accessories Indued AC Power Cable, Remote Control, Wal	Mechanical		
Mechanical Formats Net Weight (kg) 65 Environmental Gross Weight (kg) 82.5 Environmental IK Rating IK10 Operating Temperature: -20°C to 50°C Operating Humidity: 10% -80% Storage Temperature: -30°C - 60°C Storage Humidity: 5% - 90% Enclosure Protection IP65 Media Formats Video (MPG, AVI, MP4, RM, RMVB.T.S), Audio (MP3, WMA), Image (JPG, GJF, BMP, PNG) Media Resolution 1920x.1080/1080x1920 Internal Memory 6GB CPU Quad-Core Cortex-A17@1.61GHz GPU Mail-T760 MP4 @600MHz RAM 2GB DDR3 Internal Storage 3GB NAND USB USB2.0 HOST (x2) LAN 10/100/1000Mb/s Ethernet Wi-Fi 802.11b/g/n/ac OS Android 5.1.1 OS Android 5.1.1 OFID OpenGL ES 1.1/2.0/3.0/3.1, OpenCL 1.1, Renderscript, Direct3D 11.1 Accessories Included AC Power Cable, Remote Control, Wall Mount Optional Warranty			
Gross Weight (kg) 82.5 IK Rating IK10 Operating Temperature:			
IK Rating		Net Weight (kg)	65
Operating Temperature:		Gross Weight (kg)	82.5
Operating Humidity:		IK Rating	IK10
Storage Temperature:	Environmental	Operating Temperature:	-20 °C to 50 °C
Storage Humidity:		Operating Humidity:	10% - 80%
Enclosure Protection		Storage Temperature:	-30°C - 60°C
Media Formats Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG) Media Resolution 1920x1080/1080x1920 Internal Memory 6GB CPU Quad-Core Cortex-A17@1.61GHz GPU Mali-T760 MP4 @600MHz RAM 2GB DDR3 Internal Storage 8GB NAND USB USB2.0 HOST (x2) LAN 10/100/1000Mb/s Ethernet Wi-Fi 802.11b/g/n/ac OS Android 5.1.1 Graphic Engine OpenGL ES 1.1/2.0/3.0/3.1, OpenCL 1.1, Renderscript, Direct3D 11.1 Accessories Included AC Power Cable, Remote Control, Wall Mount Warranty Warranty Period 3 Year Warranty		Storage Humidity:	5% - 90%
Media Resolution 1920x1080/1080x1920 Internal Memory 6GB CPU Quad-Core Cortex-A17@1.61GHz GPU Mali-T760 MP4 @600MHz RAM 2GB DDR3 Internal Storage 8GB NAND USB USB2.0 HOST (x2) LAN 10/100/1000Mb/s Ethernet Wi-Fi 802.11b/g/n/ac OS Android 5.1.1 Graphic Engine OpenGL ES 1.1/2.0/3.0/3.1, OpenCL 1.1, Renderscript, Direct3D 11.1 Accessories Included AC Power Cable, Remote Control, Wall Mount Optional Network Upgrade, Camera Warranty Warranty Period 3 Year Warranty		Enclosure Protection	IP65
Internal Memory GGB	Computer	Media Formats	Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG)
CPU Quad-Core Cortex-A17@1.61GHz GPU Mali-T760 MP4 @600MHz RAM 2GB DDR3 Internal Storage 8GB NAND USB USB2.0 HOST (x2) LAN 10/100/1000Mb/s Ethernet Wi-Fi 802.11b/g/n/ac OS Android 5.1.1 Graphic Engine OpenGL ES 1.1/2.0/3.0/3.1, OpenCL 1.1, Renderscript, Direct3D 11.1 Accessories Included AC Power Cable, Remote Control, Wall Mount Optional Network Upgrade, Camera Warranty Warranty		Media Resolution	1920x1080/1080x1920
Computer RAM 2GB DDR3 Internal Storage RGB NAND USB USB2.0 HOST (x2) LAN 10/100/1000Mb/s Ethernet Wi-Fi 802.11b/g/n/ac OS Android 5.1.1 Graphic Engine OpenGL ES 1.1/2.0/3.0/3.1, OpenCL 1.1, Renderscript, Direct3D 11.1 Accessories Included AC Power Cable, Remote Control, Wall Mount Optional Optional Network Upgrade, Camera Warranty Warranty Warranty Warranty OpenGL ES 1.1/2.0/3.0/3.1 Os OpenGL ES 1.1/2.0/3.0/3.1 OpenGL ES 1.1/2.0/3.0/3.1 OpenGL ES 1.1/2		Internal Memory	6GB
Computer RAM 2GB DDR3 Internal Storage 8GB NAND USB USB2.0 HOST (x2) LAN 10/100/1000Mb/s Ethernet Wi-Fi 802.11b/g/n/ac OS Android 5.1.1 Graphic Engine OpenGL ES 1.1/2.0/3.0/3.1, OpenCL 1.1, Renderscript, Direct3D 11.1 Accessories Included AC Power Cable, Remote Control, Wall Mount Optional Network Upgrade, Camera Warranty Warranty Period 3 Year Warranty		CPU	Quad-Core Cortex-A17@1.61GHz
Computer Internal Storage 8GB NAND USB USB2.0 HOST (x2) LAN 10/100/1000Mb/s Ethernet Wi-Fi 802.11b/g/n/ac OS Android 5.1.1 Graphic Engine OpenGL ES 1.1/2.0/3.0/3.1, OpenCL 1.1, Renderscript, Direct3D 11.1 Accessories Included AC Power Cable, Remote Control, Wall Mount Optional Network Upgrade, Camera Warranty 3 Year Warranty		GPU	Mali-T760 MP4 @600MHz
Internal Storage		RAM	2GB DDR3
LAN		Internal Storage	8GB NAND
Warranty Wi-Fi 802.11b/g/n/ac 802.11b/g/n/ac		USB	USB2.0 HOST (x2)
OS Android 5.1.1 Graphic Engine OpenGL ES 1.1/2.0/3.0/3.1, OpenCL 1.1, Renderscript, Direct3D 11.1 Accessories Optional AC Power Cable, Remote Control, Wall Mount Optional Network Upgrade, Camera Warranty Warranty Warranty		LAN	10/100/1000Mb/s Ethernet
Graphic Engine OpenGL ES 1.1/2.0/3.0/3.1, OpenCL 1.1, Renderscript, Direct3D 11.1 Accessories Included AC Power Cable, Remote Control, Wall Mount Optional Network Upgrade, Camera Warranty Warranty Period 3 Year Warranty		Wi-Fi	802.11b/g/n/ac
Accessories Included AC Power Cable, Remote Control, Wall Mount Optional Network Upgrade, Camera Warranty Warranty Marranty		OS	Android 5.1.1
Accessories Included AC Power Cable, Remote Control, Wall Mount Optional Network Upgrade, Camera Warranty Warranty Marranty		Graphic Engine	OpenGL ES 1.1/2.0/3.0/3.1, OpenCL 1.1, Renderscript, Direct3D 11.1
Accessories Optional Network Upgrade, Camera Warranty Period 3 Year Warranty	Accessories		AC Power Cable, Remote Control, Wall Mount
Warranty Period 3 Year Warranty			
Warranty	Warranty		
recrimed Jupport		Technical Support	Lifetime





SUREWIEW



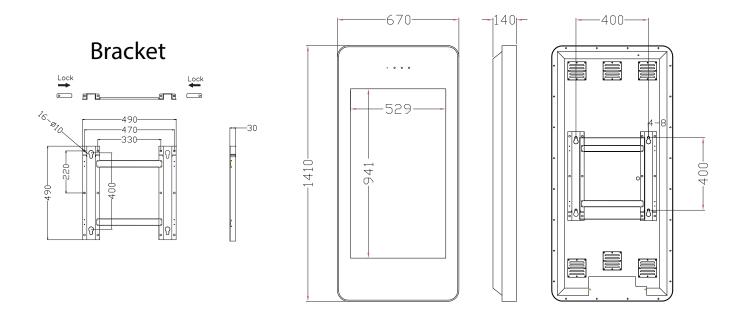



Why Choose Our Commercial Display Solutions?



Lifetime Technica Support From the moment you receive your product, throughout the duration of your warranty and even after your warranty has expired we are here to support you. If you require any assistance setting up or using your product, or have any problems at all, we can provide free technical support via telephone and email.



On-site Support and Maintenance

If needed, we can provide an installation service for any of our products. We can also set up service-level agreements for larger projects that require maintenance contracts.



Extended Warranty*

All of our commercial display products come with a 3 year commercial warranty as standard but if you want to extend this you can upgrade this to cover a 5 year period at point of purchase.



Training

As well as providing free remote CMS training sessions and webinars we can also visit you to deliver bespoke training for our software and hardware*.



Advanced Replacements[†] Should your display suffer from any kind of hardware failure during the warranty period we will send you an advanced replacement and arrange for your old display to be collected, free of charge. This ensures no downtime where you are without a screen.



Custom Product
Testing &
Configuration

If you need us to test third party software or a website, or configure your screen in a particular way before it is dispatched (e.g. in a particular orientation or network mode), we can do so to make your life easier.



3D Rendering

Want to know how a particular screen will look once installed? Send us a photo of the location and we will create a 3D rendering of any screen in situ to help you to visualise how amazing it will look.



Logistics Support

We hold more stock in our UK warehouse than any other manufacturer so we can help you meet tight deadlines. For last minute orders we can also offer special express or morning delivery options*. We also carry out UK based quality control checks on every display before it leaves our warehouse.



Project Support

If you need to loan a sample unit to test we'd be more than happy to arrange this. We can also provide a rental service for temporary projects*.



Customisation*

Your display can be customised to suit your requirements by adding your logo or printed graphics or even tailoring the colour of a display. We can also carry out hardware modifications to existing products or manufacture bespoke solutions for special projects.



As well as being able to provide accessories and add-ons, such as extra remote controls, NUC PCs and video wall controllers, we can also supply custom made flight cases which are great if a display needs to be moved safely from place to place.

