W22L100-PPA3HB

21.5" Multi-Touch Panel Mount High Brightness Display



KEY FEATURES

- 21.5", 1920 x 1080
- VGA and HDMI input
- Panel mount
- VESA mount
- Aluminum housing
- High brightness
- Front IP65




SPECIFICATIONS

Display Resolution 1920x1080 Size 21.5 inches Contrast Ratio 5000.0 panel Brightness 1000.0 nits Display Color 16.7M Colors View Angles 89,889,89 Active Area 476.64x268.11 mm Touch / Glass Projected Capacitive Multi Touch Screen Environment Tough Immidity 10% to 60% CR Departing Properature 0°C to 50% C Storage Tough Capacitive Multi Touch Screen I Prating Pront IP65 Certification CF. FCC USB Port 1 x USB for Touch Screen Video 1 x VGA 1 x HDMI (Optional) 2 x Speaker (Optional) x x DMI (Optional) 1 x HDMI (Optional) 2 x Speaker (Optional) Mechanical Dimension 53 x 324 x 77 mm Weight 6.9 kg Mounting VESA Mount/ Panel Mount Enclosure Metal Housing with Aluminum Bezel Cooling System 1 x VGA cable 1 x HDMI (cable 100~240/ A C to DC Adapter Power Color Manual Manual Manual North Color Manual Man				
Contrast Ratio 5000.0 Panel Brightness 1000.0 nits Display Color 16.7M Colors View Angles 89.89,89.89 Active Area 476.64x268.11 mm Touch / Glass Projected Capacitive Multi Touch Screen Environment Uperating Humidity 10% to 90% RH, Non-Condensing Operating Temperature Storage Temperature -10°C to 60°C IP rating Front IP65 Certification CE, FCC Log Certification CE, FCC USB Port 1 x USB for Touch Screen Video 1 x VGA 1 x HDMI (Optional) 1 x DVI (Optional) 2 x Speaker (Optional) Audio Audio Ine in (3.5mm) (Optional) 2 x Speaker (Optional) Mounting S33 x 324 x 77 mm Weight 6.9 kg Mounting VESA Mount/ Panel Mount Enclosure Metal Housing with Aluminum Bezel Cooling System Faniess Design Cut out 507 x 317 mm Accessory 1 x VGA cable 100–240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product) Optional Accessory Remote Controller (Optional, Varies by product) Power Rating	Display			
Display Color 16.7M Colors 16.7M Colors 16.7M Colors 16.7M Colors 16.64x268.11 mm 16.64x2688.11 mm 16.64x268.11 mm 16.64x2688.11 mm 16.64x2688.11 mm 16.	Resolution	1920x1080	Size	21.5 inches
Active Area 476.64x268.11 mm Touch / Glass Projected Capacitive Multi Touch Screen	Contrast Ratio	5000.0	Panel Brightness	1000.0 nits
Provious Provious	Display Color	16.7M Colors	View Angles	89,89,89,89
Departing Humidity 10% to 90% RH, Non-Condensing Departing Temperature -10°C to 60°C Prating Front IP65	Active Area	476.64x268.11 mm	Touch / Glass	Projected Capacitive Multi Touch Screen
Temperature -10°C to 60°C Temperature -10°C to 60°C Pertification Certification Certification Certification Certification Temperature Certification CE, FCC IO Ports USB Port 1 x USB for Touch Screen Video 1 x VGA 1 x HDMI (Optional) 1 x DVI (Optional) Mechanical Dimension 533 x 324 x 77 mm Weight 6.9 kg Mounting VESA Mount/ Panel Mount Enclosure Metal Housing with Aluminum Bezel Cooling System Fanless Design Cut out 507 x 317 mm Accessory Accessory Accessory Accessory 1 x VGA cable 1 x HDMI cable 1 x VGA cable 1 x HDMI cable 1 x VGA 2 x Speaker (Optional) Power Cord Manual Manual Accessory Power Cord Manual Manual Manual Accessory Remote Controller (Optional, Varies by product)	Environment			
Temperature Certification CE, FCC IO Ports USB Port 1 x USB for Touch Screen Audio line in (3.5mm) (Optional) 2 x Speaker (Optional) 2 x Speaker (Optional) Enclosure Mechanical Dimension 533 x 324 x 77 mm Meight 530 x 324 x 77 mm Meight 6.9 kg Mounting VESA Mount/ Panel Mount Enclosure Metal Housing with Aluminum Bezel Cooling System Fanless Design Cut out 507 x 317 mm Accessory Accessory 1 x VGA cable 1 x HDMI (Optional) 2 x Speaker (Optional) 3 x 224 x 77 mm Meight 6.9 kg Metal Housing with Aluminum Bezel Cord Nut 507 x 317 mm Accessory Accessory Accessory Accessory 1 x VGA cable 1 x HDMI (Optional, Varies by product) Power Cord Manual VESA screws(Varies by product) Power Rating 1 2V DC in 24V DC in (optional)	Operating Humidity	10% to 90% RH, Non-Condensing		0°C to 50°C
Cetification CE, FCC Cetification Ceti		-10°C to 60°C	IP rating	Front IP65
I x USB for Touch Screen Video 1 x VGA 1 x HDMI (Optional) 1 x DVI (Optional) 1 x	Certification			
USB Port 1 x USB for Touch Screen Video 1 x VGA 1 x HDMI (Optional) 1 x DVI (Optional) Audio 2 x Speaker (Optional) Mechanical Dimension 533 x 324 x 77 mm Weight 6.9 kg Mounting VESA Mount/ Panel Mount Enclosure Metal Housing with Aluminum Bezel Cooling System Fanless Design Cut out 507 x 317 mm Accessory Accessory Accessory 1 x VGA cable 1 x HDMI cable 100-240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product) Power Power Rating 12V DC in 24V DC in (optional)	Certification	CE, FCC		
Audio Audio line in (3.5mm) (Optional) 2 x Speaker (Optional) Mechanical Dimension 533 x 324 x 77 mm Weight 6.9 kg Mounting VESA Mount/ Panel Mount Enclosure Metal Housing with Aluminum Bezel Cooling System Fanless Design Cut out 507 x 317 mm Accessory Accessory 1 x VGA cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product) Power Power Rating 12V DC in 24V DC in (optional)	IO Ports			
Mechanical Dimension 533 x 324 x 77 mm Weight 6.9 kg Mounting VESA Mount/ Panel Mount Enclosure Metal Housing with Aluminum Bezel Cooling System Fanless Design Cut out 507 x 317 mm Accessory Accessory Accessory Accessory Power Cord Manual VESA screws(Varies by product) Power Rating 12V DC in 24V DC in (optional)	USB Port	1 x USB for Touch Screen	Video	1 x HDMI (Optional)
Dimension 533 x 324 x 77 mm Weight 6.9 kg Mounting VESA Mount/ Panel Mount Enclosure Metal Housing with Aluminum Bezel Cooling System Fanless Design Cut out 507 x 317 mm Accessory Accessory 1 x VGA cable 1 x HDMI cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product) Power Rating 12V DC in (optional)	Audio			
Mounting VESA Mount/ Panel Mount Enclosure Metal Housing with Aluminum Bezel Cooling System Fanless Design Cut out 507 x 317 mm Accessory 1 x VGA cable 1x HDMI cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product) Optional Accessory Remote Controller (Optional, Varies by product) Power Power Rating 12V DC in (optional)	Mechanical			
Cooling System Fanless Design Cut out 507 x 317 mm Accessory Accessory 1 x VGA cable 1x HDMI cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product) Power Power Rating 12V DC in 24V DC in (optional)	Dimension	533 x 324 x 77 mm	Weight	6.9 kg
Accessory 1 x VGA cable 1 x HDMI cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product) Power Rating 12V DC in 24V DC in (optional)	Mounting	VESA Mount/ Panel Mount	Enclosure	Metal Housing with Aluminum Bezel
Accessory 1 x VGA cable 1 x HDMI cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product) Power Rating 12V DC in 24V DC in (optional)	Cooling System	Fanless Design	Cut out	507 x 317 mm
1 x HDMI cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product) Power Power Rating 12V DC in 24V DC in (optional)	Accessory			
Power Rating 12V DC in 24V DC in (optional)	Accessory	1 x HDMI cable 100~240V AC to DC Adapter Power Cord Manual	Optional Accessory	Remote Controller (Optional, Varies by product)
24V DC in (optional)	Power			
Control	Power Rating			
	Control			

DIMENSIONS

UNIT:MM

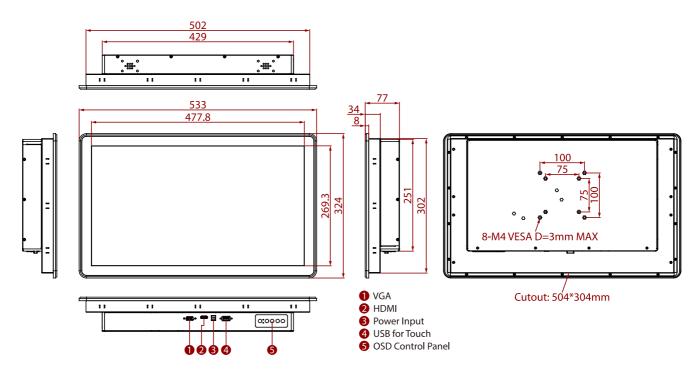

NOTE

- 1. This is a simplified drawing and some components are not marked in detail.
- 2. Please contact our sales representative if you need further product information.
- 3. All specifications are subject to change without prior notice.
- 4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.