W32L300-IPA3TR

32" Front IP65 Transflective Display

KEY FEATURES

- 32", 1920 x 1080
- VGA and HDMI input
- Panel mount
- VESA mount
- Transflective
- Front IP65 waterproof and dustproof

SPECIFICATIONS

Display			
Resolution	1920x1080	**Size**	32 inches
Contrast Ratio	4000:1	**Panel Brightness**	400 nits
Display Color	16.7M Colors	**View Angles**	89,89,89,89
Active Area	698.4 x 392.85 mm	**Touch / Glass**	Protection Glass
Environment			
Operating Humidity	10% to 90% (non-condensing)	**Operating Temperature**	0~50°C
Storage Temperature	-10~60°C		
Certification			
Certification	CE, FCC		
IO Ports			
USB Port	1 x USB for Touch Screen	**Video**	1 x VGA 1 x HDMI (Optional) 1 x DVI (Optional)
Audio	Audio line in (3.5mm) (Optional) 2 x Speaker (Optional)		
Mechanical			
Dimension	790 x 470 x 70 mm	**Mounting**	VESA Mount/ Panel Mount
Enclosure	Metal	**Cooling System**	Fanless Design
Accessory			
Accessory	1 x VGA cable 1 x HDMI cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product)	**Optional Accessory**	Remote Controller (Optional,Varies by product)
Power			
Power Rating	24V DC in		
Control			
Button	5 Keys: - , + , Power , Esc , Enter		

DIMENSIONS UNIT:MM

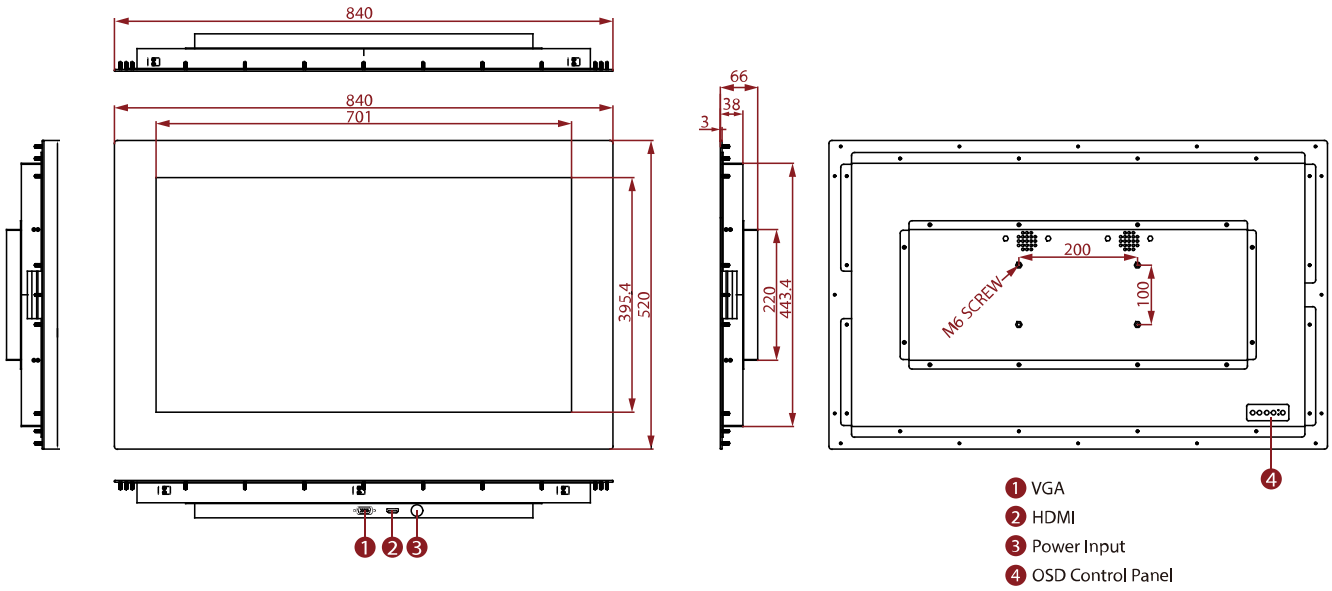

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.