W43L100-PCA1OD

43" PCAP Touch Chassis Display

KEY FEATURES

- Sunlight readable with high brightness solution
- Support VESA mount
- Support PCAP touch
- Operating temperature:-10~60℃
- Optional operating temperature : -25~60℃ with heater solution
- Optional solar radiation protection with UV film for directed sunlight environment

SPECIFICATIONS

Display			
Touch / Glass	Projected Capacitive Multi Touch Screen	**Resolution**	1920x1080
Size	42.5 inches	**Contrast Ratio**	4000:1
Panel Brightness	1500.0 nits	**Display Color**	16.7M Colors
View Angles	89,89,89,89	**Active Area**	940.896x529.254 mm
Environment			
Operating Humidity	10% to 90% RH, Non-Condensing	**Operating Temperature**	-10°C to 60°C
Storage Temperature	-20°C to 70°C	**IP rating**	Front IP65
Certification			
Certification	CE, FCC		
IO Ports			
USB Port	1 x USB for Touch Screen	**Video**	1 x VGA 1 x HDMI 1 x DVI(Optional)
Mechanical			
Dimension	1028.8 x 617 x 48 mm	**Mounting**	VESA Mount
Enclosure	Metal Housing with Aluminum Bezel	**Cooling System**	Fanless Design
Power			
Power Rating	24V DC in		
Accessory			
Accessory	1 x VGA cable 1 x HDMI cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product)	**Optional Accessory**	Remote Controller (Optional,Varies by product)
Control			
Button	5 Keys: - , + , Power , Esc , Enter		

DIMENSIONS

UNIT:MM

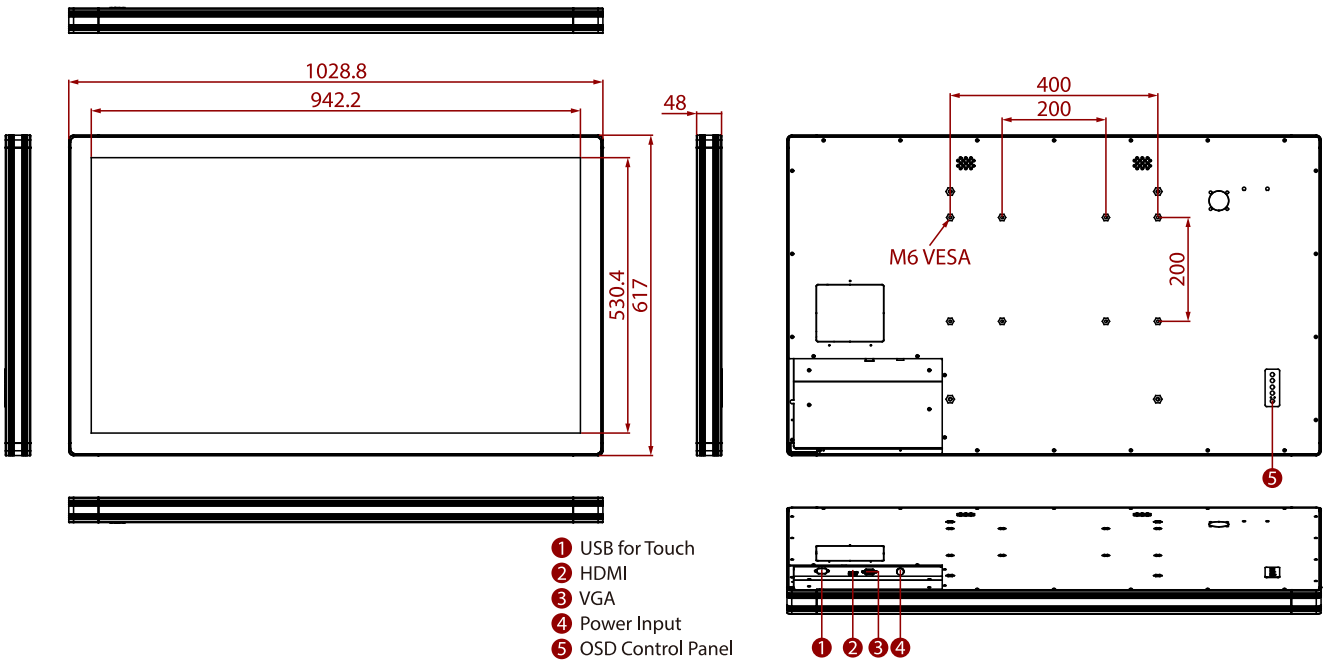

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.