


FCH15055

IP66, Stainless Chassis, 15" 1024x768, LED Backlight 350nits

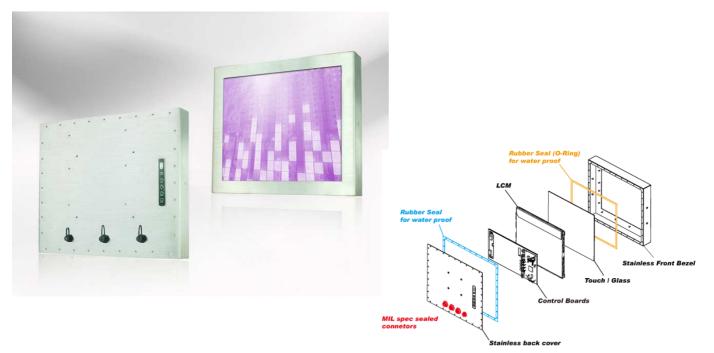

### FEATURES

- Modular design
- 350 cd/m<sup>2</sup> luminosity
- Optional touchscreen
- Optional transflective panel
- Optional auto-brightness sensor

# BRIEF PRODUCT DESCRIPTION

With IP66 Full Stainless Steel protection, the FCH1505S provides complete protection against outside contact with internal electronic or electrical components, protection against harmful deposits of dust, and strong water jets being squirted from any direction against the enclosure.


With a bright 350 candela LED backlight screen along with an optional transflective panel, this screen can be used in the brightest of conditions.

### ORDERING INFORMATION

FCH1505S

	Cell Type	TFT LCD Anti-glare
Panel	Native Resolution	1024 x 768
	Brightness	350 cd/m <sup>2</sup>
	Contrast	700:1
	Response Time	≤ 12 ms
	Viewing Angle	H. 140 (-70° ~ +70°)
		V. 125 (-60° ~ +65°)
	Light Source	LED backlit, Life 35,000 hours (typ.)
Inputs	VGA	15 Pin Female D-Sub
	Audio	PC Audio (Stereo headphone jack)
Power	Input	90~260V AC
	Power Adapter	12V AC/DC
Environmental		
Environmental	Temperature, ambient operating	0°c to 50°c
Environmental Parameters	ambient	0°c to 50°c 10% to 90% (Non-condensing)
Parameters Physical	ambient operating Humidity, ambient	
Parameters	ambient operating Humidity, ambient operating	10% to 90% (Non-condensing) 395.5mm (W) x 316.8mm (H) x
Parameters Physical	ambient operating Humidity, ambient operating Dimensions	10% to 90% (Non-condensing) 395.5mm (W) x 316.8mm (H) x 74mm (D)
Parameters Physical	ambient operating Humidity, ambient operating Dimensions Weight	10% to 90% (Non-condensing) 395.5mm (W) x 316.8mm (H) x 74mm (D) 4kg
Parameters Physical	ambient operating Humidity, ambient operating Dimensions Weight Resistive	10% to 90% (Non-condensing) 395.5mm (W) x 316.8mm (H) x 74mm (D) 4kg Optional
Parameters Physical Dimensions	ambient operating Humidity, ambient operating Dimensions Weight Resistive Capacitive Surface Acoustic	10% to 90% (Non-condensing) 395.5mm (W) x 316.8mm (H) x 74mm (D) 4kg Optional Optional

## MECHANICAL DRAWING

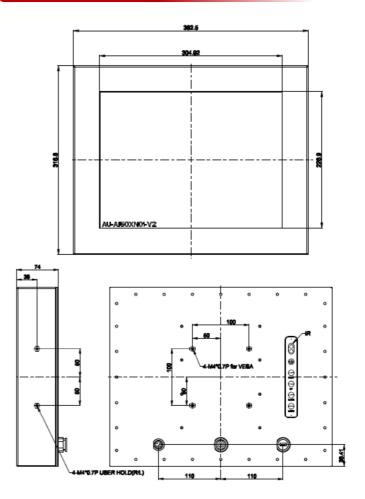

Winsonic FCH1505S

#### About Assured Systems (UK) Ltd

Assured Systems is a leading British technology company offering high quality and innovative applied computing solutions to the embedded, industrial, and digital-out-of-home markets across the United Kingdom and Ireland.

Our impressive product portfolio includes a full range of Fanless Embedded Computer Systems, Digital Signage & Multimedia Computer Systems, Touchscreen Panel PCs, Human Machine Interfaces, Vehicle Mount Computers, Rackmount Computer Systems, Single Board Computers, Rugged Laptops & Tablets.

#### Contact Information

Assured Systems (UK) Ltd
Tollgate Court Business Centre, Tollgate Drive,
Stafford, ST16 3HS
<b>T:</b> 01785 87 90 50
F: 01785 87 90 51
E: sales@assured-systems.co.uk
W: www.assured-systems.co.uk