

FRONT PANEL



DVB-T/T2 TUNER/DEMODULATOR (SONY)

Frequency Range	470~858 MHz
Demodulation	DVB-T/T2 COFDM 2k, 8k
Bandwidth	7 / 8 MHz automatic selection by region
Input Level	* 60 ~ 80 dB μ V (-47 to -27 dBm) * Input levels other than these are possible but not recommended
Input Impedance	75 Ohm unbalanced
Connector	IEC DIN Jack
Noise Figure	5.5 - 7 dB
IF centre frequency	36.167 MHz


NETWORK MANAGEMENT

Connector Supported	1 x RJ45 (management & multicast)
Format	10 / 100
DHCP Support	UDP Command Yes

NETWORK STREAMING

Format	UDP Multicast
Processing Modes	Full Stream - Full transport stream, transparent mode. Single Multicast IP out MPTS-Filter Mode, selected channels only with table rebuild. Single Multicast IP out SPTS-Multi channel mode, selected channels (3 maximum), with table rebuild. Multiple Multicast IP out (3 maximum)
SAP	SAP Support automatic on SPTS mode

REAR PANEL

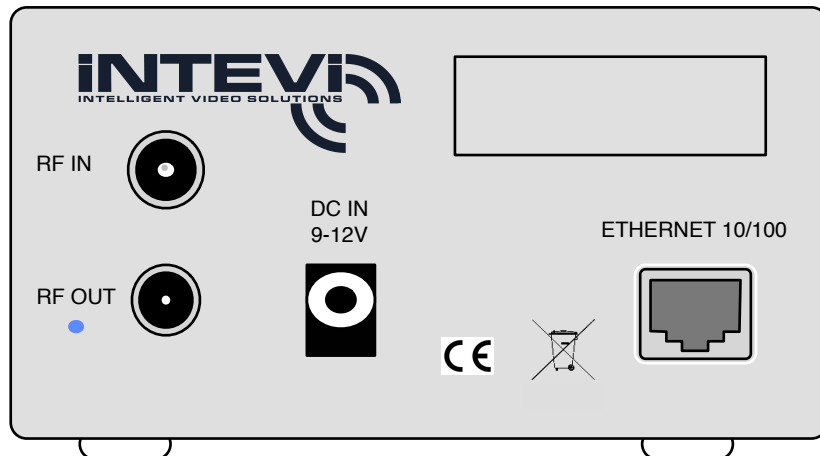

OTHER

DC Connector	2.1mm DC Connector
Power	7.5 - 12V DC 2.5W Typ.
Dimensions DxWxH	140 x 107 x 57 mm
Weight	370gm.

INTEVI
INTELLIGENT VIDEO SOLUTIONS

MiniStreamer MS002 Technical Information

Date	07-Jan-2013
Revision	TJS-001