

CE511-HN

4K HDMI 2.0 PCIe Capture Card



Features

- HDMI 2.0 input
- Real-time uncompressed video capturing
- Max resolution up to 4k (3840 x 2160 60fps)
- Hardware up/down scaling, de-interlacing, color space convert
- Automatic detection of input signals
- SG-DMA Transmission mode
- Multiple devices on one host
- Low latency

Introduction

The CE511-HN 4K HDMI 2.0 PCIe Gen2 x4 capture card is a reliable and pure HDMI solution for digital video capturing. Supporting HDMI 2.0 standard, the CE511-HN enables uncompressed and lossless real-time 4K (3840 x 2160 60 fps) video capturing. Seamless integration in vertical applications, such as: professional videoconferencing, broadcasting and digital signage or any application, which require super high video quality is easy through the use of the AVerMedia SDK. Windows and Linux driver support is included making the CE511-HN the best choice for all your capturing needs.

Real-time 4K 60 frames per second video capturing

Supporting the latest HDMI 2.0 standard, the CE511-HN is able to transmit 4K lossless video data through its PCIe Gen2 x4 data bus at an amazing 60 frames per second. With a 3840x2160 ultra high resolution and 60 frames per second capture rate, the CE511-HN can record the smallest details and capture fast motion for a remarkable and smooth playback.


Low latency

Capturing stunning uncompressed raw data and recording it with almost zero latency is made possible with the CE511-HN. Low latency pass from the moment the video source is captured, encoded, transmitted, decoded and displayed. This low latency is particularly beneficial for applications that require real-time solutions.

Hardware Scaling, De-Interlacing and Color Space Conversion

AVerMedia hardware-based video engine technology implements the most useful video processing functions, including de-interlacing for a sharper image and color space conversion for more true-to-life video color and scaling. This can help reduce the computing burden on hardware and software in order to focus on other important applications on hand.

Connection Diagram

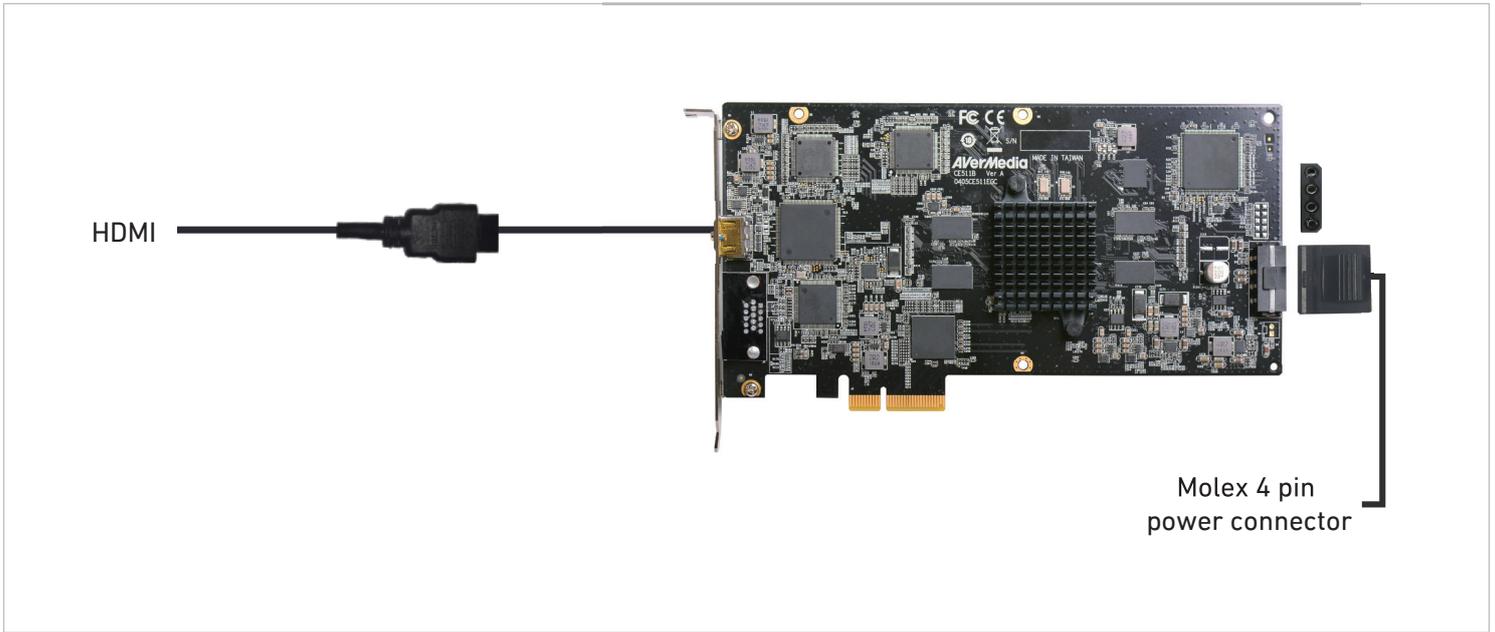

Specifications

| | |
|----------------------------------|-----------------------|
| Host Interface | PCIe Gen2 x4 |
| Audio Interface | HDMI |
| Audio Format | PCM |
| Audio Sampling Rate | 32KHz, 44.1KHz, 48KHz |
| Connector Type | HDMI Type A |
| Input Interface | HDMI |
| Video Format | YUV 4:2:2, RGB24 |
| Color Depth | 8-bit |
| Channel No. | 1 Ch (HDMI 2.0) |
| Max. Input Resolution | 3840 x 2160 60fps |
| Max. Capturing Resolution | 3840 x 2160 60fps |

| | |
|------------------------------|--|
| Encoding Mode | Software Encode |
| Multi-Card Support | Yes |
| Supported OS | Windows 7/8.1/10 (32/64 bits), Linux (32/64 bit) * |
| Form Factor | Full Height |
| Dimensions (L x W) | 200 mm x 100 mm |
| Power Consumption | 12W |
| Power Requirements | 12V (Molex 4 pin peripheral power connector) |
| Operating Temperature | 0°C ~ 40°C |
| Operating Humidity | 5% - 80% Relative Humidity |
| Safety Certification | CCC / FCC / CE |

* Linux Services

- Support Linux kernel 2.6.14 version and later based on V4L2 & ALSA framework
- Driver customization service by request

Versatile SDK

AVerMedia software development kit (SDK), a set of development tools that allows a software engineer to seamlessly integrate video capture modules into application specific systems. Available upon request are the SDK Basic, SDK Pro and to better match each applications specific requirements premium add-on kits.

Ordering Information

- CE511-HN : HDMI 2.0 PCIe Capture Card
- Accessories
 - Quick Installation Guide
 - Installation CD
- SDK Kits
 - SDK Basic
 - SDK Pro (Optional)
 - Premium add-on kits (Optional)