

GOT110-316 NEW

10.4" XGA TFT Fanless Touch Panel Computer with Intel® Celeron® Processor N3350

Features

- 10.4" XGA TFT LCD display with LED backlight
- Fanless design with Intel® Celeron® processor N3350
- 2 GbE LANs, 4 USB and 2 COM
- IP65 rated front bezel and IPX1 rated back cover
- Peripheral support including MSR, RFID, Wi-Fi, Smart card reader and barcode scanner
- External AT/ATX mode selection switch
- Easy maintenance design for storage and memory
- Supports optional panel mount/wall mount/VESA arm/desktop stand
- Adjust RS-232/422/485 setting via BIOS
- Aluminum cover for the better thermal dissipation and reliability




1. Power LED
2. HDD LED
3. Brightness adjust +/-
4. Display on/off
5. Volume on/off



▲ Side view



▲ Rear view

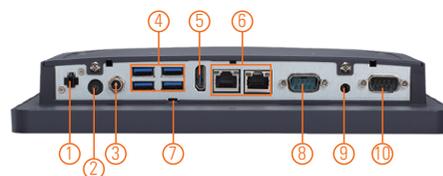

1. Remote power switch
2. Power button
3. Screw connector for adapter
4. USB 3.0 x 4
5. HDMI x 1
6. Ethernet x 1
7. AT/ATX switch
8. COM 1 (RS-232/422/485)
9. Audio (Line-out)
10. COM 2 (RS-232)
11. Cable cover (optional)
12. Speaker



Introduction

The GOT110-316 is a 10.4" Intel® Celeron®-based fanless touch panel computer. In response to market demand, this panel computer is a cost effective solution. It adopts a modern, super sleek and fanless design and is equipped with a 10.4" TFT LCD as well as Intel® Celeron® processor N3350 dual core up to 2.40 GHz. For wireless network connection, the GOT110-316 offers 2 PCI Express Mini Card slots. By just plugging in the mini card WLAN card, customers can have instant access to wireless LAN. Besides, it can be integrated with some peripheral including barcode scanner, RFID, MSR, Wi-Fi, Bluetooth.

Super Slim t Design

The GOT110-316 is a super slim touch panel computer for space-limited environment with its thickness of 43 mm which make it installed everywhere.

PoE Solution

GOT110-316 provide PoE solution which make system operated with only one Ethernet cable that provide data and power to the system. This infrastructure allows to centralized power management, therefore it is a cost-effective solution for access control, home and industrial automation.

Aluminum Back Chassis with Excellent Thermal Solution

With Axiomtek's patent for plastic plus aluminum mechanism design, the GOT110-316 can dissipate the heat easily and keep the system operation stable.

Specifications

| | | |
|-------------|---|---|
| Front Bezel | IP65, NEMA 4 rugged protection, plastic front bezel | |
| LCD Panel | Display Type | 10.4" XGA TFT LCD with LED backlight |
| | Brightness (cd/m ²) | 350 nits (XGA) |
| | Resolution | 1024 x 768 |
| | Viewing Angel (H/V) | 160°/160° |
| Main System | CPU | Intel® Celeron® processor N3350 2 cores (up to 2.40 GHz) |
| | System Memory | 1 x 204-pin DDR3L-1600 MHz SO-DIMM, up to 8GB |
| | BIOS | AMI UEFI BIOS |
| | Storage | 1 x 2.5" SATA HDD 1 x mSATA |
| | Watchdog Timer | 255 levels, 0 ~ 255 sec. |
| | Onboard Graphics | Integrated in Intel® GFX |

Specifications

| | |
|---------------------|--|
| I/O Connector | 1 x RS-232/422/485 (default RS-232) 1 x RS-232 2 x 10/100/1000 Mbps Ethernet 4 x USB 3.0 1 x screw type connector for power 1 x power button (ATX) 1 x remote power switch 1 x Line-out 1 x ATX/AT selectable switch 1 x HDMI |
| Expansion Interface | 1 x full-size PCI Express Mini Card slot with mSATA 1 x full-size PCI Express Mini Card slot with SIM |
| Touchscreen | Projected capacitive multi-touch 5-wire flat resistive touch |
| Power Supply | 1. DC version: 12/19 ~ 24 VDC adapter cable 2. AC version: 100 ~ 240 VAC-DC, 60W power adapter |
| Power Consumption | 24W |
| Dimension | 259.43 mm (10.21") (W) x 43.5 mm (1.71") (D) x 232.73 mm (9.16") (H) |
| Packing Dimensions | 415 mm (16.34") (W) x 100 mm (3.94") (D) x 315 mm (12.4") (H) |
| Weight (net/gross) | 1.8 kg (3.96 lb)/3 kg (6.61 lb) |
| Environment | Operating temperature: 0°C ~ +50°C (+32°F ~ +122°F) Relative humidity: 20% ~ 90% @ +40°C; non-condensing Operation vibration: 2G, 5 ~ 500Hz, random for SSD |
| Certificate | CE FCC |

Ordering Information

| | |
|-----------------|---|
| Standard | |
| GOT110-316-J | 10.4" XGA fanless touch panel computer with Intel® Celeron® processor N3350, 5-wire flat resistive touch AC-DC 60W power adapter and EMI Class A (screw type connector) |

Optional

- Wi-Fi + Bluetooth kit
- Panel mount kit
- Wall mount kit
- Stand kit
- RFID kit
- MSR card reader kit
- Barcode scanner kit
- AC to DC adapter cable

* Specification and certifications are based on requirements and may vary.

Optional OS Installation

Windows® 10



Dimensions

